

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input

0.75 Vdc - 6.0 Vdc/6 A Output



Jan. 25, 2013


Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

VRBA-06A1Ax

RoHS Compliant

Rev.B

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency
- Certificated to UL60950-1/CSA C22.2 No.60950-1, 2rd edition, am1
- Under-Voltage Lockout (UVLO)
- OCP/SCP
- Remote On/Off
- Wide Trim Range

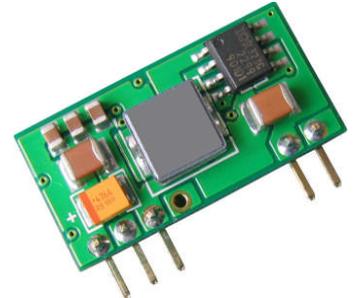

Applications

- Networking
- Computers and peripherals
- Telecommunications

Description

The Bel VRBA-06A1Ax modules are a series of non-isolated dc/dc converters that can deliver up to 6 A of output current with full load efficiency of 92% at 6.0 Vdc output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 Vdc to 6.0 Vdc over input voltage (10 Vdc - 14 Vdc). Their open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, programmable output voltage and over current protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency at 6.0 Vdc	Model Number Active Low	Model Number Active High
0.75 V - 6.0 V	10 V - 14 V	6 A	36W	92%	VRBA-06A1AL	VRBA-06A1A0

- Notes:** 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Part Number Explanation

$\frac{V}{1} \frac{R}{2} \frac{BA}{3} - \frac{06}{4} \frac{A}{5} \frac{1A}{6} \frac{x}{7}$

- 1---Vertical mount
- 2---RoHS 6, change "R" to "7" means RoHS 5
- 3---Series name
- 4---Series code
- 5---Wide input range (10-14V)
- 6---Wide trim
- 7---Option, "x" of the model part number to be 0-9, A-Z, which will represent the special request of customer.

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input

0.75 Vdc - 6.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Note: All specifications are typical at 25 °C unless otherwise stated.

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	10 V	12 V	14 V	
Input Current (full load)				
Vo=6.0 V	-	3.5 A	-	
Vo=5.0 V	-	2.8 A	-	
Vo=3.3 V	-	1.9 A	-	
Vo=2.5 V	-	1.5 A	-	
Vo=1.8 V	-	1.1 A	-	
Vo=0.75 V	-	0.55 A	-	
Input Current (no load)				
Vo=6.0 V	-	-	100 mA	
Vo=0.75 V	-	-	20 mA	
Remote Off Input Current	-	3 mA	5 mA	
Input Reflected Ripple Current (pk-pk)	-	120 mA	-	Tested with two 100 uF/25 V tan input capacitors & simulated source impedance of 1uH, 5 Hz to 20 MHz.
Input Reflected Ripple Current (rms)	-	40 mA	-	
I ² t Inrush Current Transient	-	0.002 A ² s	0.02 A ² s	
Turn-on Voltage Threshold	-	9.5 V	9.8 V	
Turn-off Voltage Threshold	-	9.0 V	9.5 V	

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2%Vo,set	-	2%Vo,set	Vin=12 V, full load
Output Voltage Set Point	-2.5%Vo,set	-	3.5%Vo,set	Over all operating input voltages, resistive loads and temperature conditions
Load Regulation	-	0.4%Vo,set	-	Io=Io, min to Io, max
Line Regulation	-	0.3%Vo,set	-	Vin=Vin, min to Vin, max
Regulation Over Temperature (-40 °C to +85 °C)	-	0.5%Vo,set	-	Tref=Ta, min to Ta, max
Output Current	0 A	-	6 A	
Current Limit Threshold	7 A	-	15 A	
Short Circuit Surge Transient	-	0.25 A ² s	-	

Note: All specifications are typical at nominal input (Vin=12 V), full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input

0.75 Vdc - 6.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Output Specifications(continued)

Parameter	Min	Typ	Max	Notes	
Ripple and Noise (pk-pk)				Tested with 0-20 MHz, with 10 uF/10 V tantalum capacitor and 1uF/10 V ceramic capacitor at the output	
Vo=6.0 V	-	85 mV	-		
Vo=5.0 V	-	75 mV	-		
Vo=3.3 V	-	60 mV	-		
Vo=2.5 V	-	50 mV	-		
Vo=1.8 V	-	40 mV	-		
Vo=0.75 V	-	20 mV	-		
Ripple and Noise (rms)					
Vo=6.0 V	-	30 mV	-		
Vo=5.0 V	-	25 mV	-		
Vo=3.3 V	-	20 mV	-		
Vo=2.5 V	-	15 mV	-		
Vo=1.8 V	-	12 mV	-		
Vo=0.75 V	-	7 mV	-		
Turn on Time	-	15 mS	25 mS		
Overshoot at Turn on	-	0%	3%		
Output Capacitance					
ESR ≥ 1mohm	0 uF	-	1000 uF		
ESR ≥ 10mohm	0 uF	-	3300 uF		
Transient Response					
50% ~ 100% Max Load	Vo = 0.75 V - 6.0 V	-	200 mV	-	di/dt=2.5 A/uS; Vin=12 V; and with 10 uF/10 V tantalum capacitor and 1uF/10 V ceramic capacitor at the output
Settling Time		-	50 uS	-	
100% ~ 50% Max Load		-	200 mV	-	
Settling Time		-	50 uS	-	

Note: All specifications are typical at nominal input (Vin=12 V), full load at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=12 V, full load
Vo=6.0 V	-	92%	-	
Vo=5.0 V	-	90%	-	
Vo=3.3 V	-	88%	-	
Vo=2.5 V	-	85%	-	
Vo=1.8 V	-	83%	-	
Vo=0.75 V	-	71%	-	
Switching Frequency	280 kHz	300 kHz	320 kHz	
Over Temperature Shutdown	-	135 °C	-	
MTBF	3,266,517 hours			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)
Dimensions				
Inches (L x W x H)	1.0 x 0.5 x 0.243			
Millimeters (L x W x H)	25.4 x 12.7 x 6.16			
Weight	-	3 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input

0.75 Vdc - 6.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3 V	-	0.4 V	VRBA-06A1A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	2.5 V	-	14 V	
Signal Low (Unit On)	-0.3 V	-	0.4 V	VRBA-06A1AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	2.5 V	-	14 V	
Output Voltage Trim Range (Wide Trim)	0.7525 V	-	6.3 V	

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{10.507}{V_{adj} - 0.7525} - 1$$

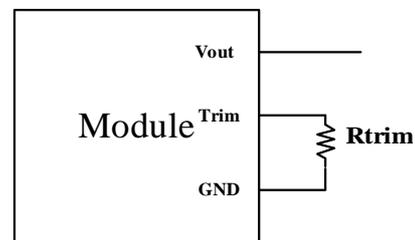

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{trim} = 0.7 - 0.0667 \times (V_{adj} - 0.7525)$$

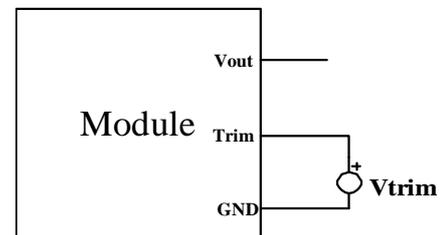

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input





0.75 Vdc - 6.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Efficiency Data

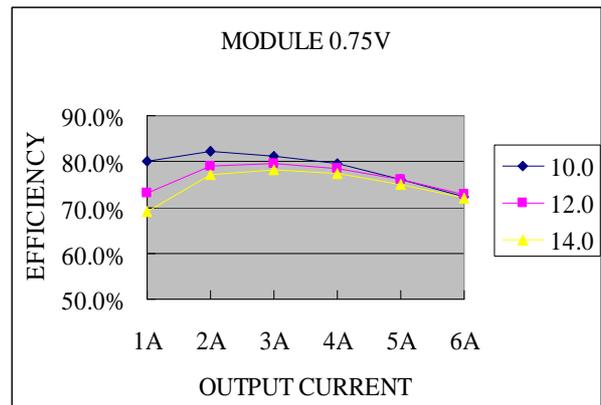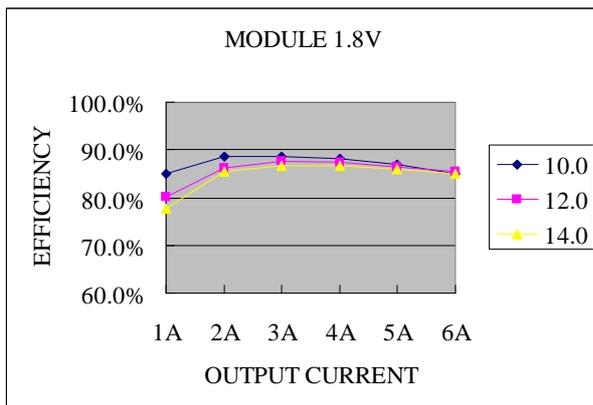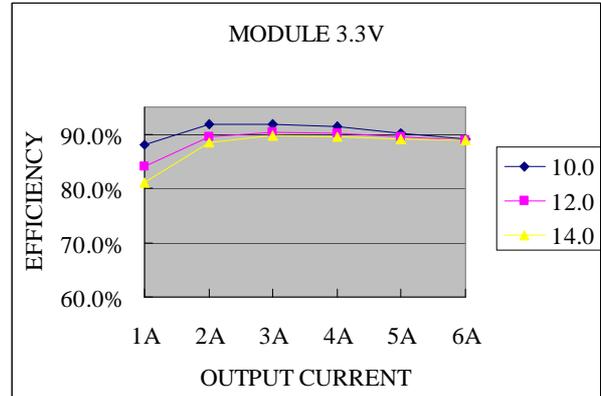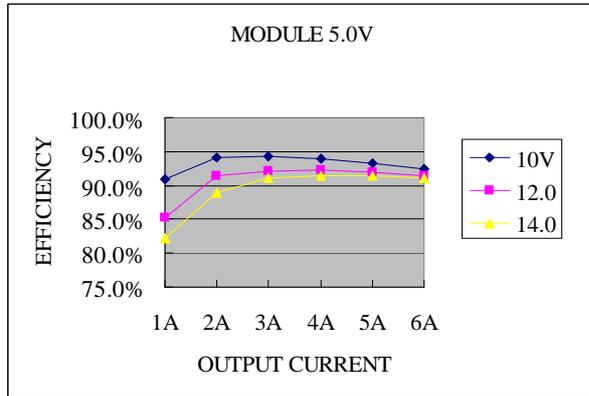

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input


0.75 Vdc - 6.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Thermal Derating Curves

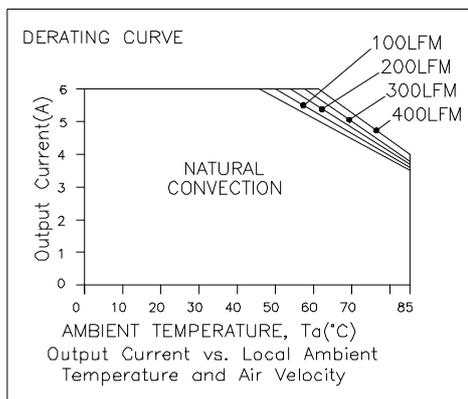


Vin=12 V, Vo=0.75 V

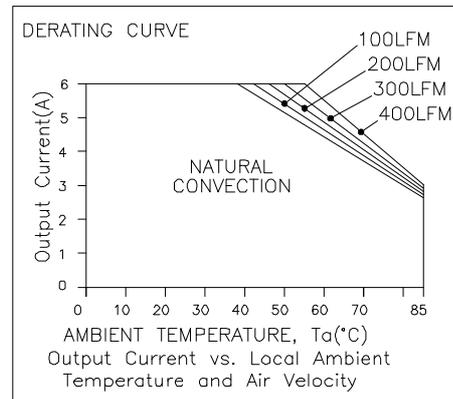

Vin=12 V, Vo=2.5 V

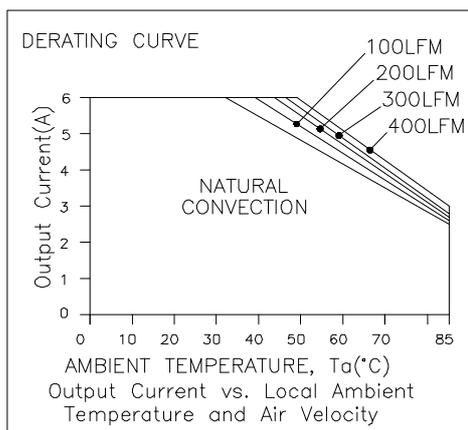

Vin=12 V, Vo=3.3 V

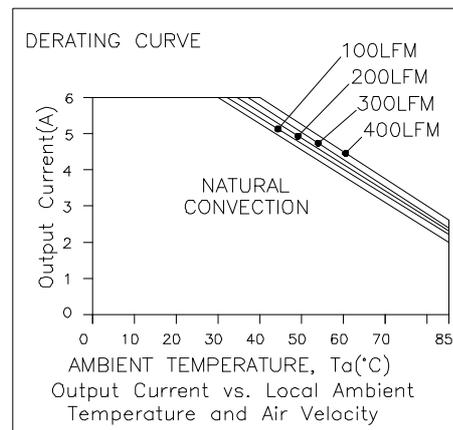

Vin=12 V, Vo=6.0 V

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input


0.75 Vdc - 6.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Ripple and Noise Waveforms

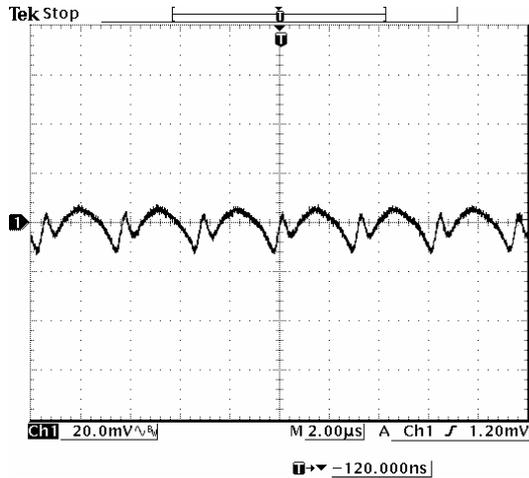

Ripple and noise at full load, $V_{in}=12\text{ V}$, $V_o=0.75\text{ V}$

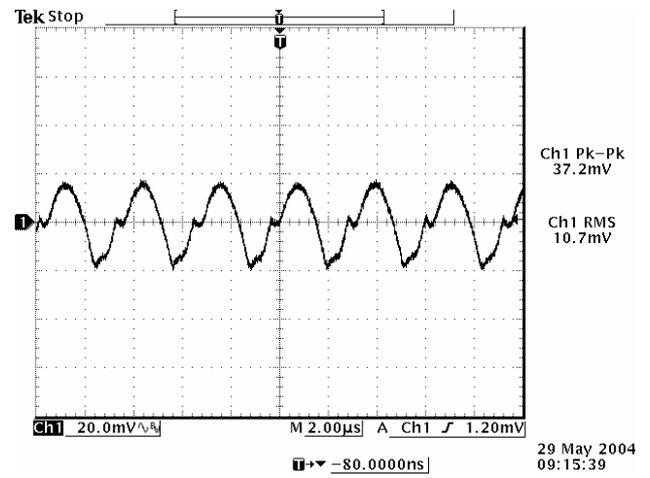

Ripple and noise at full load, $V_{in}=12\text{ V}$, $V_o=2.5\text{ V}$

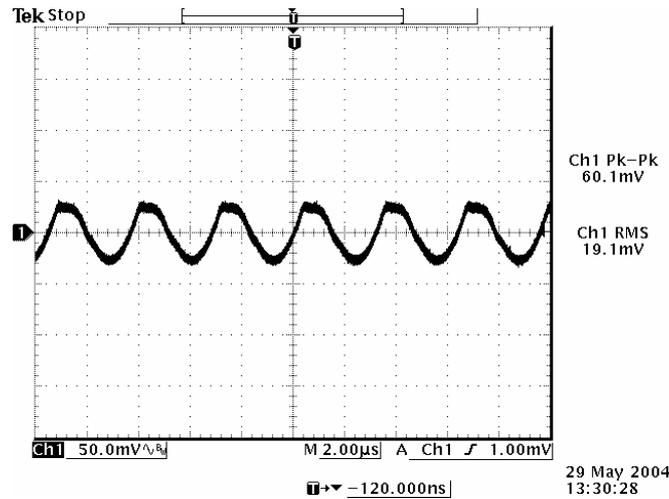

Ripple and noise at full load, $V_{in}=12\text{ V}$, $V_o=6.0\text{ V}$

Note: The output ripple and noise is tested at 0-20 MHz BW, 10 $\mu\text{F}/10\text{ V}$ tantalum capacitor and 1 $\mu\text{F}/10\text{ V}$ ceramic capacitor, $T_a=25\text{ deg C}$.

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input


0.75 Vdc - 6.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Transient Response Waveforms

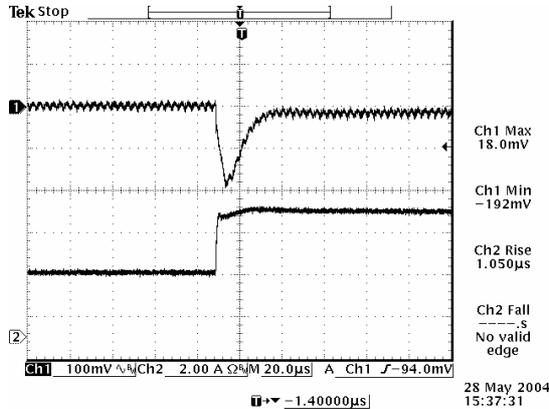


50% to 100% load step at $V_{in}=12\text{ V}$, $V_o=0.75\text{ V}$

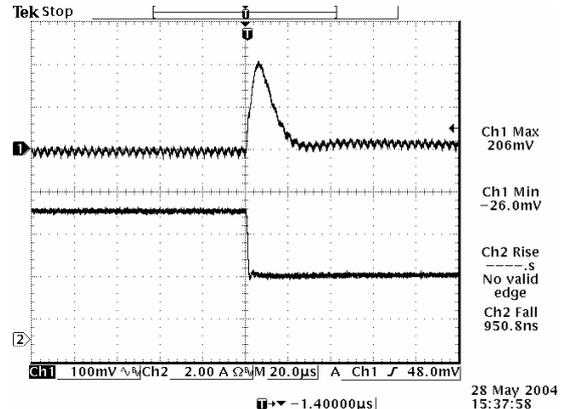


100% to 50% load step at $V_{in}=12\text{ V}$, $V_o=0.75\text{ V}$

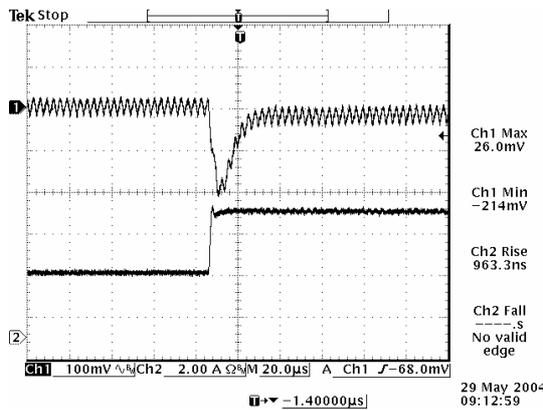


50% to 100% load step at $V_{in}=12\text{ V}$, $V_o=1.8\text{ V}$

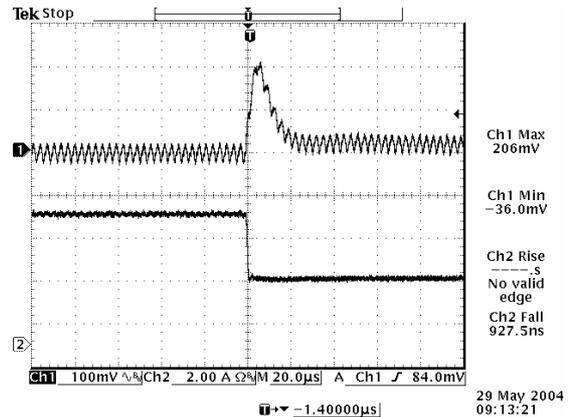

100% to 50% load step at $V_{in}=12\text{ V}$, $V_o=1.8\text{ V}$

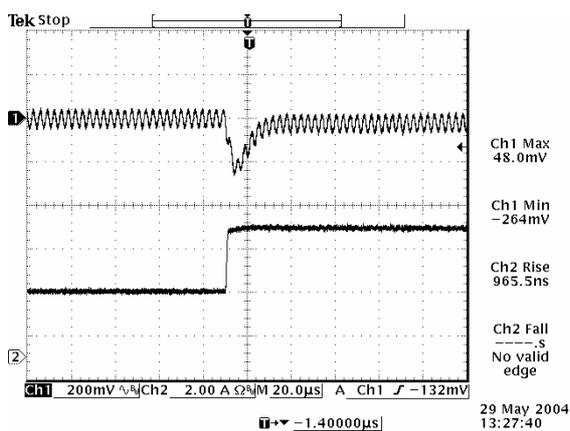

50% to 100% load step at $V_{in}=12\text{ V}$, $V_o=6.0\text{ V}$

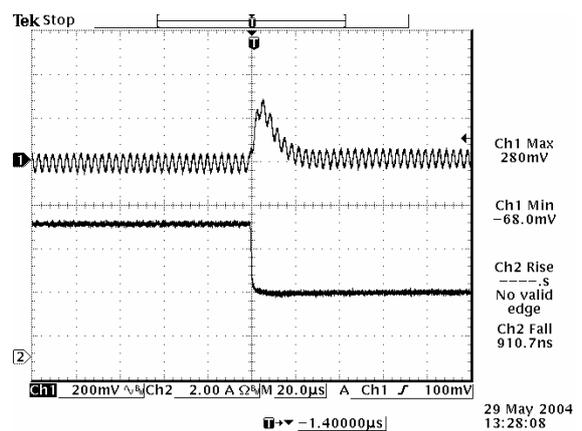

100% to 50% load step at $V_{in}=12\text{ V}$, $V_o=6.0\text{ V}$

Note: Transient response is tested at $di/dt=2.5\text{ A}/\mu\text{S}$, with 10 $\mu\text{F}/10\text{ V}$ tantalum capacitor and 1 $\mu\text{F}/10\text{ V}$ ceramic capacitor, $T_a=25\text{ deg C}$.

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input



0.75 Vdc - 6.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Mechanical Outline

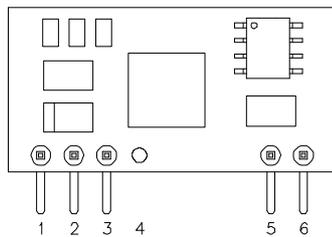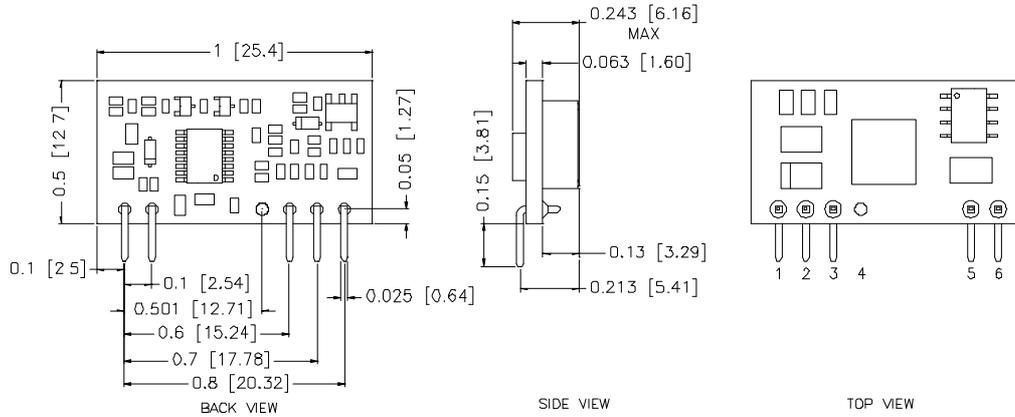

Pin Connections

Pin	Function
1	Vout
2	Trim
3	Ground
4	No Pin
5	Vin
6	Remote On/Off

Recommended Pad Layout for SIP Module

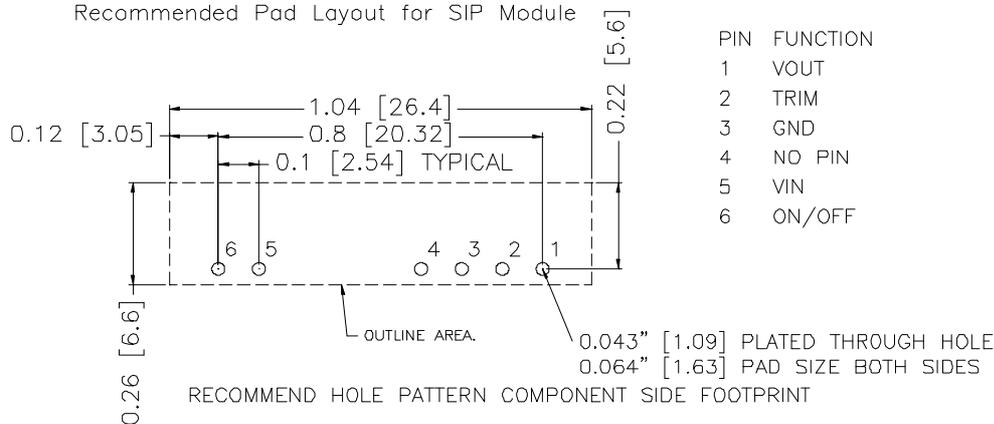

PIN	FUNCTION
1	VOUT
2	TRIM
3	GND
4	NO PIN
5	VIN
6	ON/OFF

Note:

- 1) All Pins: Material - Copper Alloy;
Finish – 3 micro inches minimum Gold over 50 micro inches minimum Nickel plate.
- 2) Undimensioned components are shown for visual reference only.
- 3) All dimensions in inches (mm); Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm) x.xxx +/-0.010 in. (x.xx +/-0.25mm).

NON-ISOLATED DC/DC CONVERTERS

10 Vdc - 14 Vdc Input

0.75 Vdc - 6.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

Revision History

Date	Revision	Changes Detail	Approval
2007-01-13	A	Change version to A	Lynn
2013-01-25	B	Update UL.	HL

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2013 Bel Fuse Inc. Specifications subject to change without notice. 012513

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com