


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE, INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE, INC.

PRELIMINARY



- NOTES:
- PLASTIC HOUSING: THERMOPLASTIC PBT, BLACK FLAMMABILITY RATING UL 94V-0
 - CONTACTS PLATING: 50 MICRO-INCH HARD GOLD PLATING OR EQUIVALENT, TIN-COATED COPPER WIRE, DIA 0.018 INCH.
 - PINS: 100 MICRO-INCH MIN MATTE TIN. PINS ARE SOLDER DIPPED.
 - METAL SHIELD: NICKEL PLATED ON COPPER ALLOY. (ALL GROUND LEADS ARE SOLDER DIPPED)
- MARK PART WITH MFG LOGO, MFG NAME, PART NUMBER, DATE CODE AND PATENTED.
 - THE PRODUCT IS RoHS COMPLIANT.

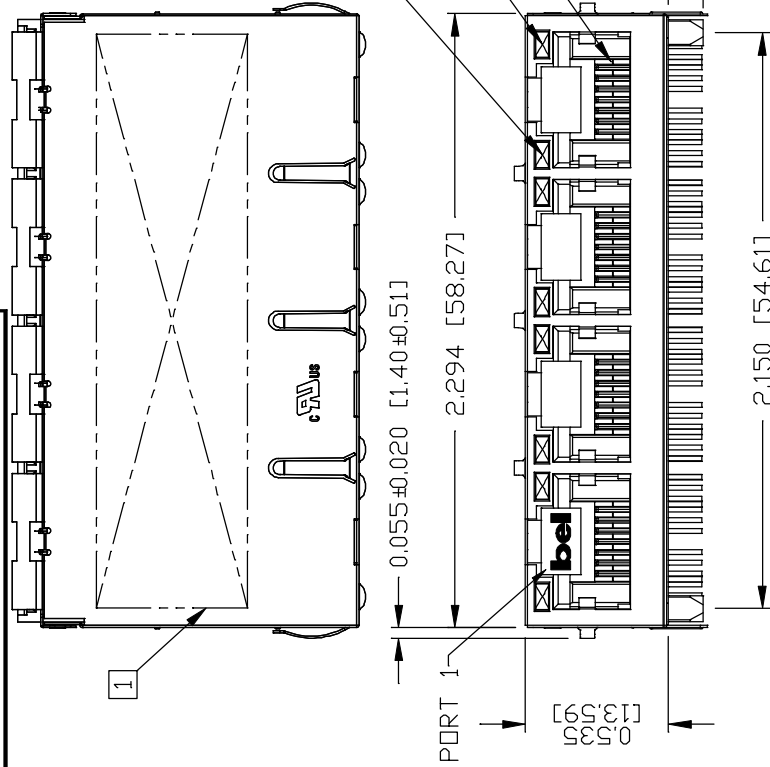

- FUSE** UL RECOGNIZED - FILE #E196366 AND E169987.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS.
 - THE PRODUCT IS PATENTED. THE PATENT NUMBER IS U.S. PAT. 7,123,117.
 - THE PART IS RECOMMENDED FOR WAVE SOLDERING. THE SUGGESTED PEAK WAVE SOLDERING CONDITION IS 260°C MAX AND 10 SECONDS MAX.

REV. : 1		PAGE : 3	
STANDARD DIM. [] METRIC DIM. AS REF.		UNIT : INCH [mm]	
TOL. IN INCH		SCALE : N/A	
.X		.XXX	
.XX		+0.010	
.XXX		SIZE : A4	
PART NO. / DRAWING NO.		0826-1C4T-KDM-F	
FILE NAME		0826-1C4T-KDM-F_1.DWG	
TITLE		1X4 2.5 gigabit MagJack® (Extended Temperature) PATENTED	
ORIGINATED BY		LI QUANKUN	
DATE		2021-09-24	
DRAWN BY		OLIVER ZHANG	
DATE		2021-09-24	




This document is electronically generated. This is a controlled copy if used internally

DC002(2)120214


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

PRELIMINARY

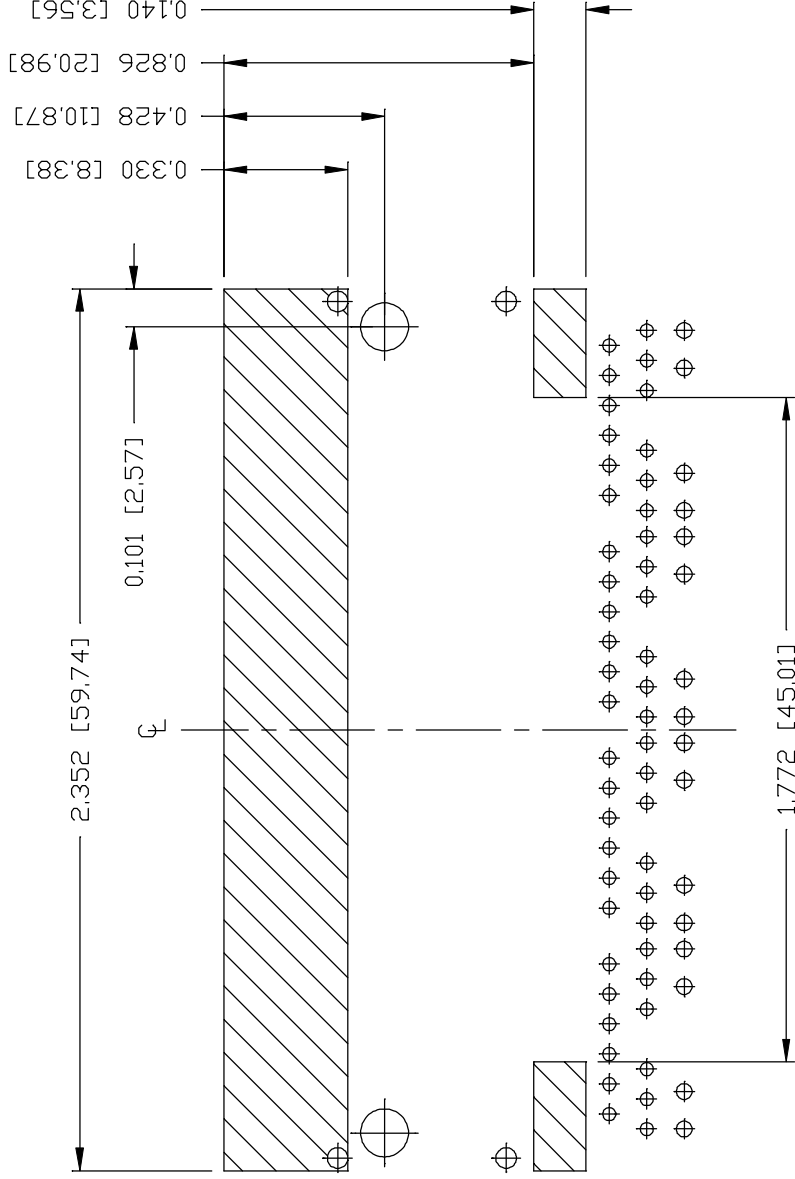

NOTES:

THE SHADED AREA ON THE CUSTOMER BOARD ARE RECOMMENDED TO BE CLEAR OFF ANY VIA HOLE OR COMPONENT PAD.

REV. : 1 PAGE : 5	
 a bel group	
ORIGINATED BY LI QUANKUN	TITLE 1X4 2.5 gigabit MagJack® (Extended Temperature) PATENTED
DATE 2021-09-24	PART NO. / DRAWING NO. 0826-1C4T-KDM-F
DRAWN BY OLIVER ZHANG	STANDARD DIM. TOL. IN INCH .X .XX .XXX
DATE 2021-09-24	FILE NAME 0826-1C4T-KDM-F_1.DWG
DC002(2)120214	[] METRIC DIM. AS REF. UNIT : INCH [mm] SCALE : N/A SIZE : A4


This document is electronically generated. This is a controlled copy if used internally

THE INFORMATION CONTAINED HEREIN IS CONSIDERED 'PROPRIETARY' TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

PRELIMINARY



SUGGESTED PANEL OPENING

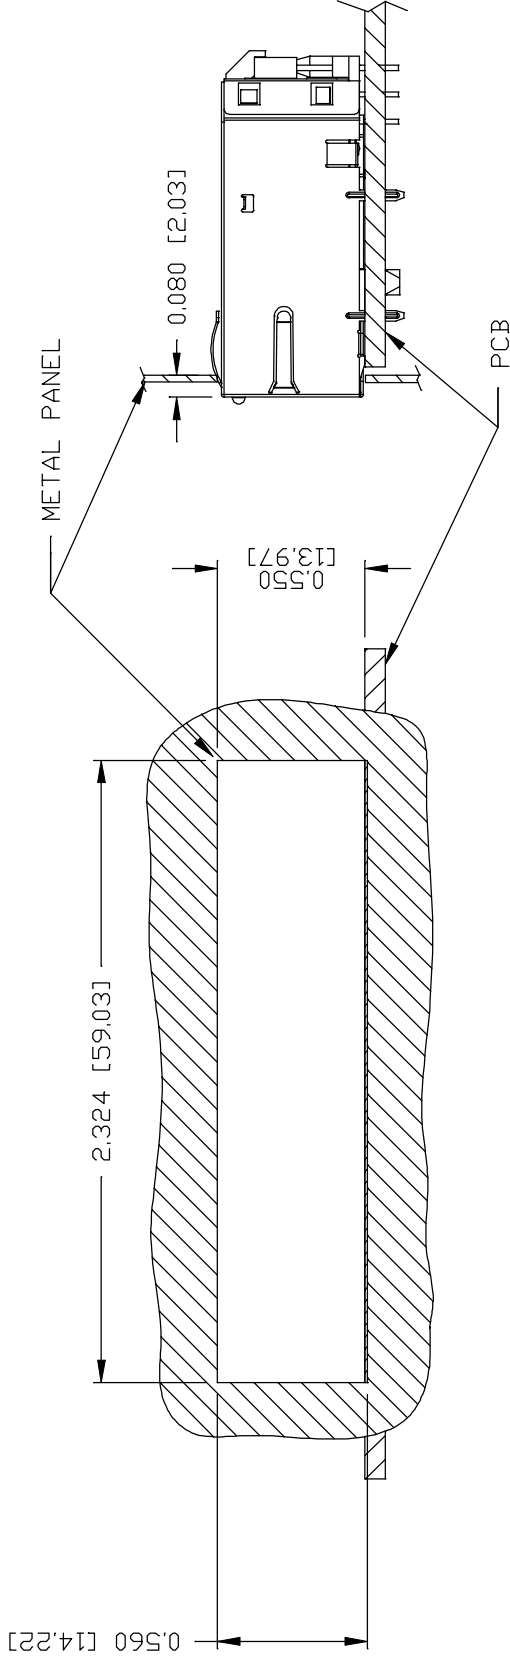

NOTES:

THE DISTANCE OF PANEL INSIDE SURFACE RELATIVE TO FRONT SURFACE OF PART IS ONLY A SUGGESTION. IN CASE THIS DISTANCE IS DIFFERENT, THE REQUIRED PANEL OPENING DIMENSIONS CHANGE ACCORDINGLY.

PACKING INFORMATION

PACKING TRAY : 0200-9999-B4 (TOP)
0200-9999-B5 (BOTTOM)

PACKING QUANTITY : 24 PCS FINISHED GOODS PER TRAY

10 TRAYS (240 PCS FINISHED GOODS) PER CARTON BOX

NOTE : CARDBOARDS ARE PLACED BETWEEN LAYERS OF PACKING TRAY INSIDE CARTON BOX (INCLUDE THE UPPERMOST AND LOWERMOST TRAY)

REV. : 1 PAGE : 6	
 a bel group	
ORIGINATED BY LI QUANKUN	PART NO. / DRAWING NO. 0826-1C4T-KDM-F
DATE 2021-09-24	STANDARD DIM. TOL. IN INCH
DRAWN BY OLIVER ZHANG	[] METRIC DIM. AS REF.
DATE 2021-09-24	UNIT : INCH [mm] SCALE : N/A SIZE : A4
TITLE 1X4 2.5 gigabit MagJack® (Extended Temperature) PATENTED	.X .XX .XXX
	#0.005

This document is electronically generated. This is a controlled copy if used internally