

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/6 A Output


Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

SRBA-06E1Ax

RoHS Compliant

Rev.D

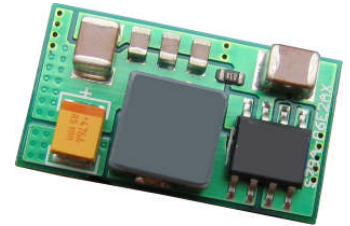

Features

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency
- Active Low/High (Option)
- Certified to UL60950-1/CSA C22.2 No.60950-1, 2rd edition, am1
- Under-Voltage Lockout (UVLO)
- Remote On/Off
- OCP/SCP
- Wide Input
- Wide Trim Range

Applications

- Networking
- Computers and peripherals
- Telecommunications

Description

The Bel SRBA-06E1Ax modules are a series of non-isolated dc/dc converters that can deliver up to 6 A of output current with full load efficiency of 92% at 5.0 Vdc output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 Vdc to 5.0 Vdc over a wide range of input voltage. Their open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, programmable output voltage and over current protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
3.3 V - 5.0 V	$V_{o,set}+1V - 14 V$	6 A	30.0 W	92%	SRBA-06E1AL	SRBA-06E1A0
0.75 V - 3.3 V	4.5 V - 14 V	6 A	19.8 W	88%	SRBA-06E1AL	SRBA-06E1A0

Notes: 1. Add "G" suffix at the end of the model numbers to indicate Tray Packaging.

Part Number Explanation

S R BA - 06 E 1A x
1 2 3 4 5 6 7

1---Surface mount Vertical mount

2---RoHS 6, change "R" to "7" means RoHS 5

3---Series name

4---Series code

5---Wide input range (4.5-14V)

6---Wide trim

7---Option, "x" of the model part number to be 0-9, A-Z, which will represent the special request of customer.

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Note: All specifications are typical at 25 °C unless otherwise stated.

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
$V_o, \text{set} \leq 3.3 \text{ V}$	4.5 V	12 V	14 V	
$V_o, \text{set} > 3.3 \text{ V}$	$V_o, \text{set} + 1 \text{ V}$	12 V	14 V	
Input Current (full load)				
$V_o = 5.0 \text{ V}$	-	2.75 A	4.8 A	
$V_o = 3.3 \text{ V}$	-	1.85 A	4.8 A	
$V_o = 1.8 \text{ V}$	-	1.05 A	3.2 A	
$V_o = 0.75 \text{ V}$	-	0.55 A	1.8 A	
Input Current (no load)				
$V_o = 5.0 \text{ V}$	-	-	100 mA	
$V_o = 0.75 \text{ V}$	-	-	20 mA	
Remote Off Input Current	-	3 mA	5 mA	
Input Reflected Ripple Current (pk-pk)	-	120 mA	200 mA	Tested with two 100 $\mu\text{F}/25 \text{ V}$ input Tantalum capacitors & simulated source impedance of 1 μH , 5 Hz to 20 MHz.
Input Reflected Ripple Current (rms)	-	60 mA	100 mA	
I^2t Inrush Current Transient	-	0.002 A^2s	0.02 A^2s	
Turn-on Voltage Threshold				
$V_o, \text{set} \leq 3.3 \text{ V}$	-	4.3 V	4.5 V	
$V_o, \text{set} = 5.0 \text{ V}$	-	6.0 V	6.5 V	
Turn-off Voltage Threshold				
$V_o, \text{set} \leq 3.3 \text{ V}$	-	4.0 V	4.3 V	Shut down or below 90% set point.
$V_o, \text{set} = 5.0 \text{ V}$	-	5.5 V	6.0 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	$-2\%V_o, \text{set}$	-	$2\%V_o, \text{set}$	$V_{in} = 12 \text{ V}$, $I_o = I_o \text{ max}$
Output Voltage Set Point	$-2.5\%V_o, \text{set}$	-	$3.5\%V_o, \text{set}$	Over all operating input voltage, resistive load, and temperature conditions
Load Regulation	-	$0.4\%V_o, \text{set}$	-	$I_o = I_{o \text{ min}}$ to $I_{o \text{ max}}$
Line Regulation	-	$0.3\%V_o, \text{set}$	-	$V_{in} = V_{in \text{ min}}$ to $V_{in \text{ max}}$
Regulation Over Temperature (-40°C to +85°C)	-	$0.5\%V_o, \text{set}$	-	$T_{ref} = T_{amin}$ to T_{amax}
Output Current	0 A	-	6 A	
Current Limit Threshold	6.8 A	-	15 A	

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Output Specifications(continue)

Parameter	Min	Typ	Max	Notes	
Short Circuit Surge Transient	-	0.25 A ² s	-		
Ripple and Noise (pk-pk)				Tested with 0-20 MHz BW, with external 10 uF/10 V tantalum capacitor & 1 uF/10 V ceramic capacitor at the output	
Vo=5.0 V	-	100 mV	140 mV		
Vo=3.3 V	-	80 mV	120 mV		
Vo=0.75 V	-	35 mV	70 mV		
Ripple and Noise (rms)				Tested with 0-20 MHz BW, with external 10 uF/10 V tantalum capacitor & 1 uF/10 V ceramic capacitor at the output	
Vo=5.0 V	-	35 mV	50 mV		
Vo=3.3 V	-	25 mV	40 mV		
Vo=0.75 V	-	10 mV	15 mV		
Turn on Time	-	6 mS	12 mS		
Overshoot at Turn on	-	0%	3%		
Output Capacitance					
ESR ≥ 1mohm	0 uF	-	1000 uF		
ESR ≥ 10mohm	0 uF	-	2200 uF		
Transient Response					
50% ~ 100% Max Load	Vo = 0.75 -5.0 V	-	200 mV	350 mV	di/dt=2.5 A/uS; Vin=12 V; and with 10 uF/10 V tantalum capacitor & 1 uF/10 V ceramic capacitor at the output.
Settling Time		-	25 uS	50 uS	
100% ~ 50% Max Load		-	200 mV	350 mV	
Settling Time		-	25 uS	50 uS	

Note: All specifications are typical at nominal input (Vin=12 V), full load at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=12 V, Io=Io, max
Vo=5.0 V	88%	92%	-	
Vo=3.3 V	85%	88%	-	
Vo=1.8 V	80%	84%	-	
Vo=0.75 V	68%	73%	-	
Switching Frequency	220 kHz	250 kHz	280 kHz	
Output Voltage Trim Range (wide trim)	0.7525 V	-	5 V	
MTBF	3,560,000 hours			Calculated Per Bell Core TR-332 (Io = Nominal; Ta = 25 °C)
Dimensions				Surface Mount
Inches (L x W x H)	0.8 x 0.45 x 0.251			
Millimeters (L x W x H)	20.32 x 11.42 x 6.38			
Weight	-	5 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3 V	-	0.4 V	SRBA-06E1A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	2.5 V	-	14 V	
Signal Low (Unit On)	-0.3 V	-	0.4 V	SRBA-06E1AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	2.5 V	-	14 V	

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

Output Trim Equations


Equation for calculating the trim resistor (in k Ω) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{10.507}{V_{adj} - 0.7525} - 1$$

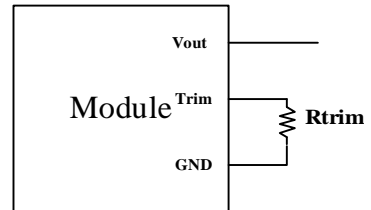

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{trim} = 0.7 - 0.0667 \times (V_o - 0.7525)$$

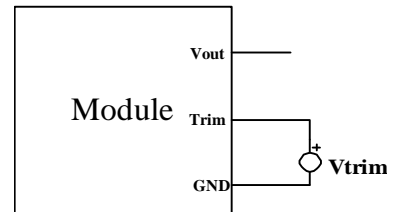

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input





0.75 Vdc - 5.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Efficiency Data

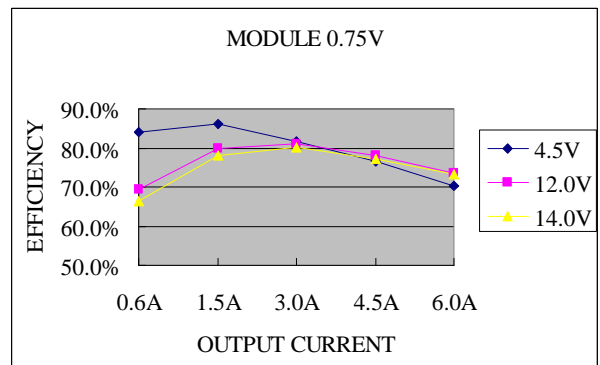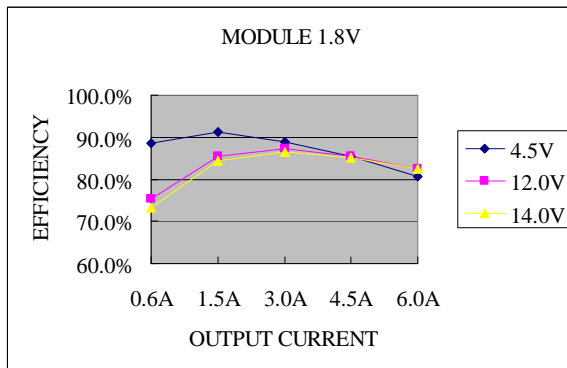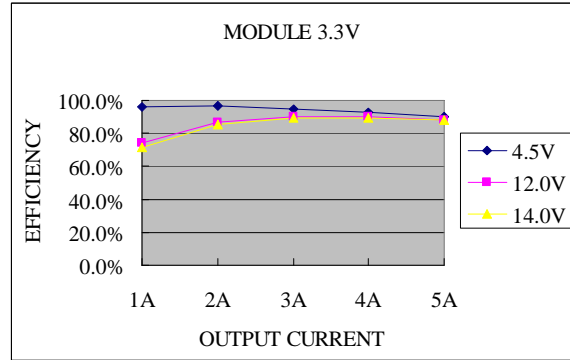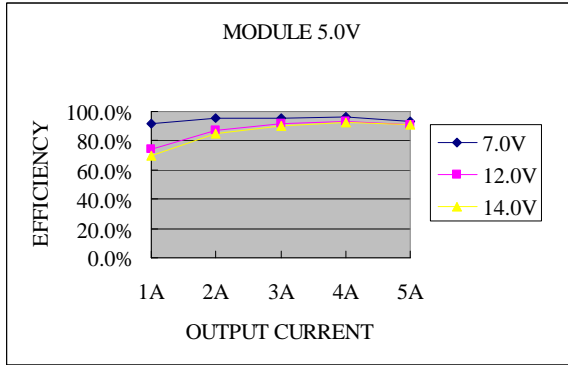

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Thermal Derating Curves

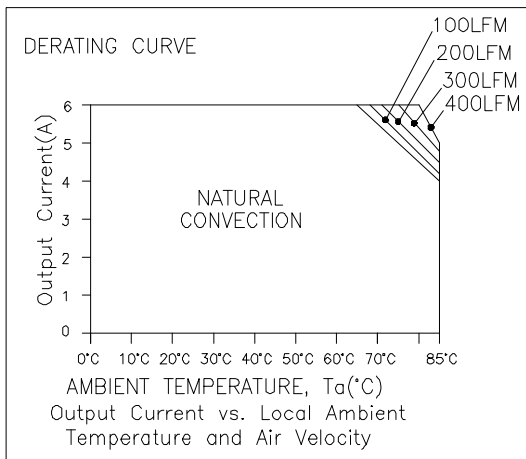

Vo=0.75 V

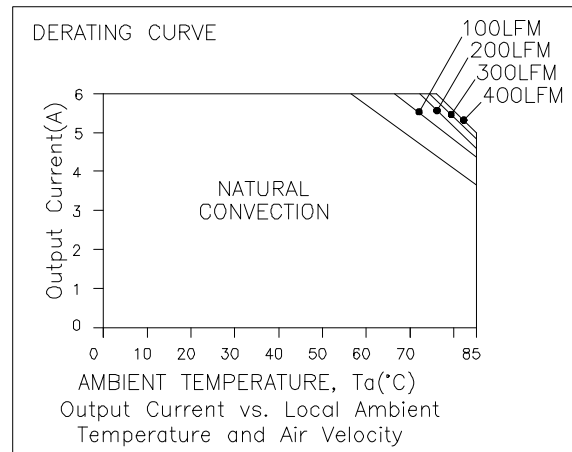

Vo=2.5 V

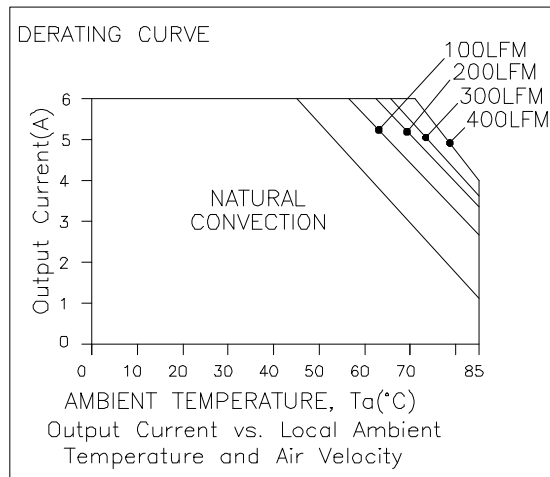

Vo=5 V

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Ripple and Noise Waveforms

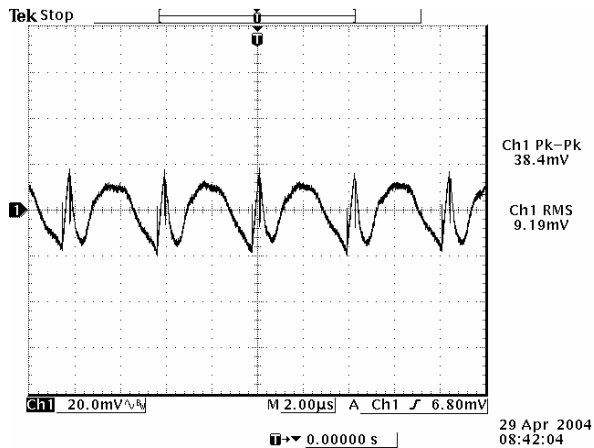


12 V input, 0.75 V output

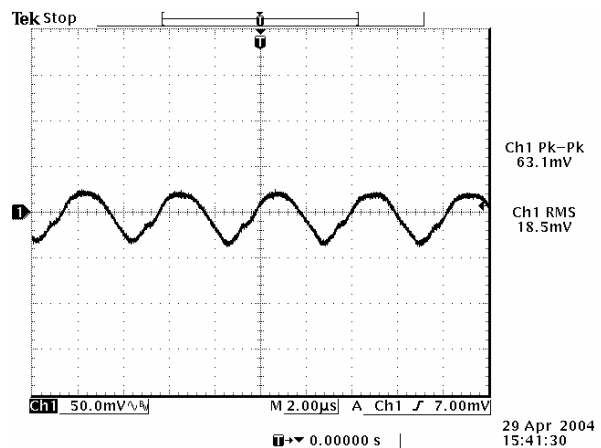

12 V input, 1.8 V output

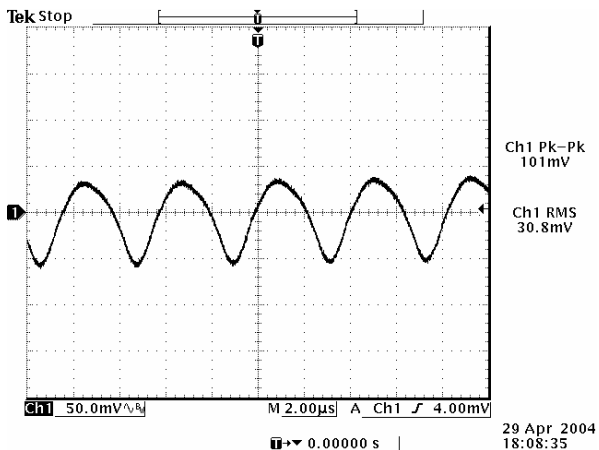

12 V input, 3.3 V output

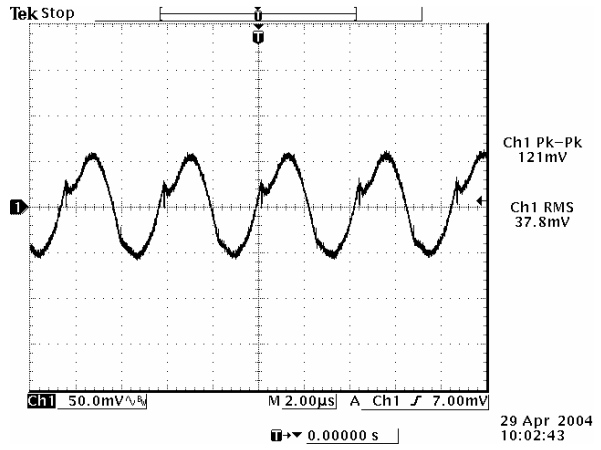

12 V input, 5.0 V output

Note: Ripple and noise at full load, 0-20 MHz BW, with 10 μ F/10 V tantalum capacitor and 1 μ F/10 V ceramic capacitor at the output, $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Transient Response Waveforms

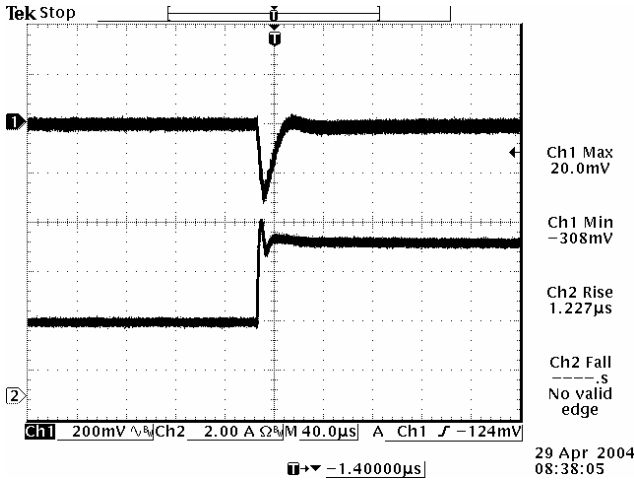


50% to 100% load step at $V_{in}=12$ V, $V_o=0.75$ V

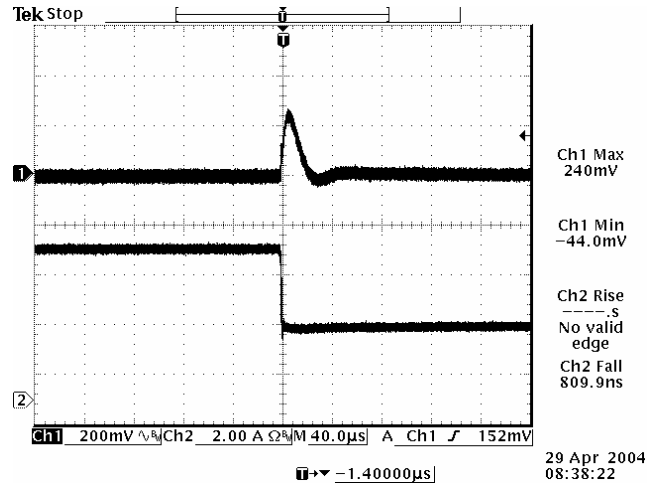

100% to 50% load step at $V_{in}=12$ V, $V_o=0.75$ V

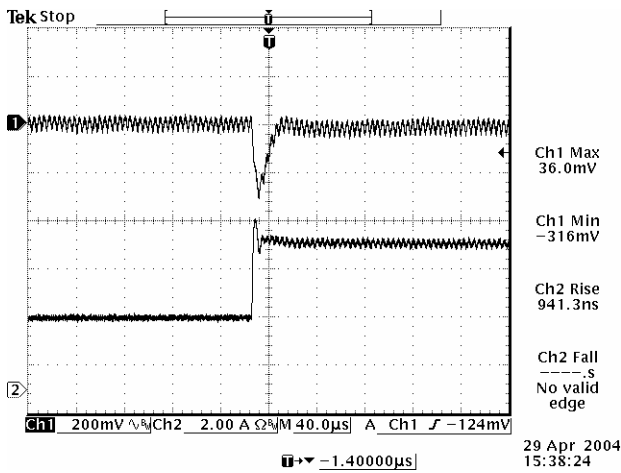

50% to 100% load step at $V_{in}=12$ V, $V_o=1.8$ V

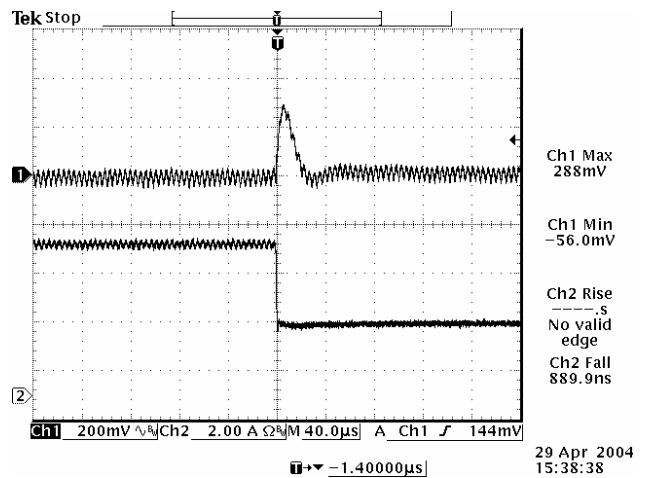

100% to 50% load step at $V_{in}=12$ V, $V_o=1.8$ V

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Transient Response Waveforms (continued)

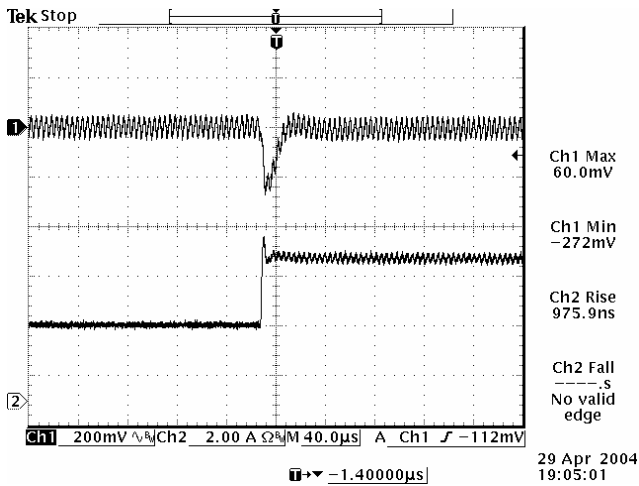


50% to 100% load step at $V_{in}=12$ V, $V_o=3.3$ V

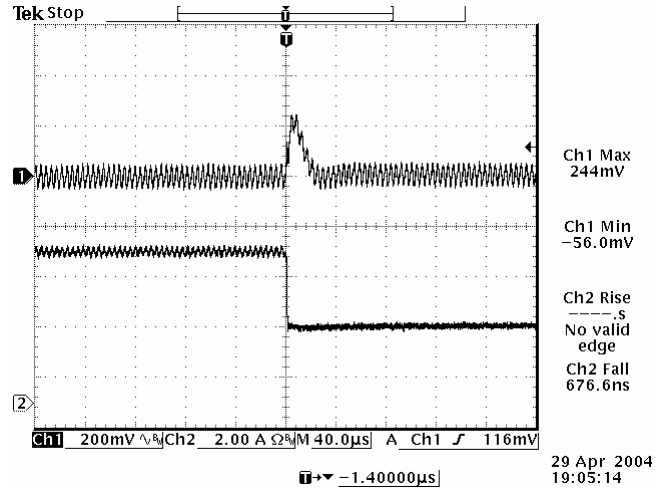

100% to 50% load step at $V_{in}=12$ V, $V_o=3.3$ V

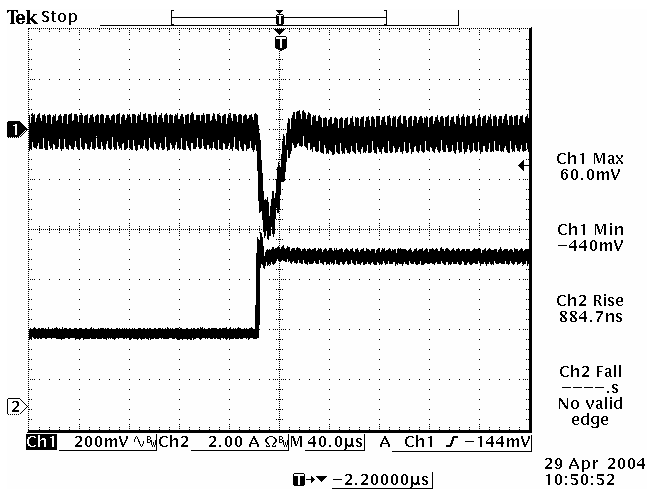

50% to 100% load step at $V_{in}=12$ V, $V_o=5$ V

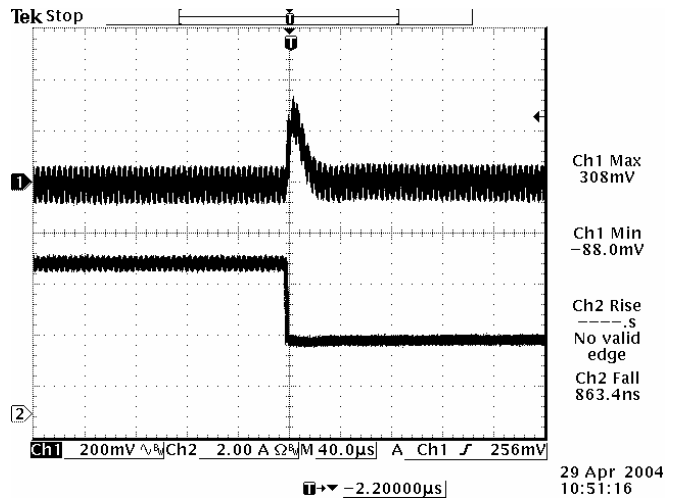

100% to 50% load step at $V_{in}=12$ V, $V_o=5$ V

Note: Transient response at $di/dt=2.5$ A/uS, with 10 uF/10 V tantalum capacitor and 1 uF/10 V ceramic capacitor at the output, $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input



0.75 Vdc - 5.0 Vdc/6 A Output





Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Mechanical Outline

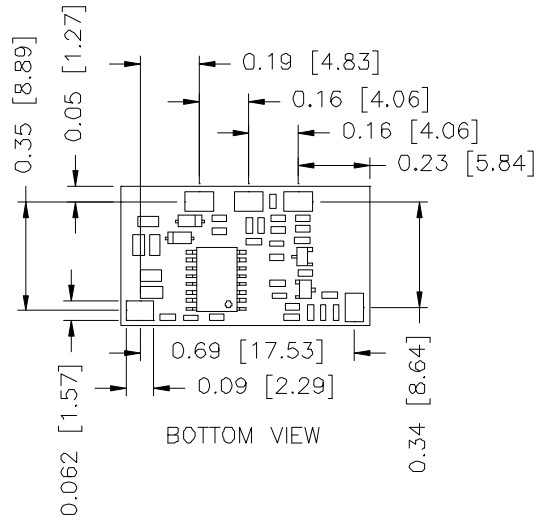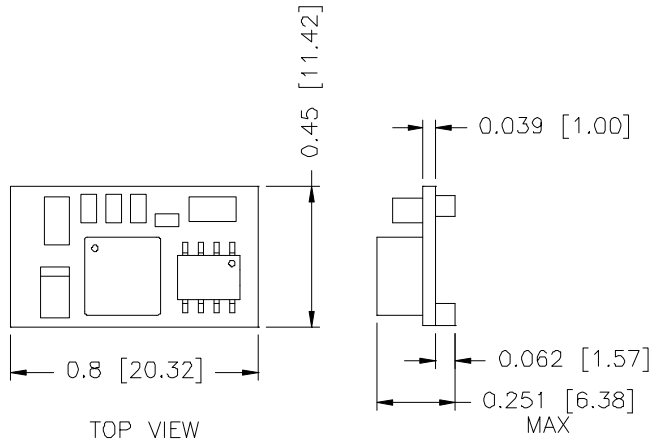

RECOMMENDED PAD LAYOUT

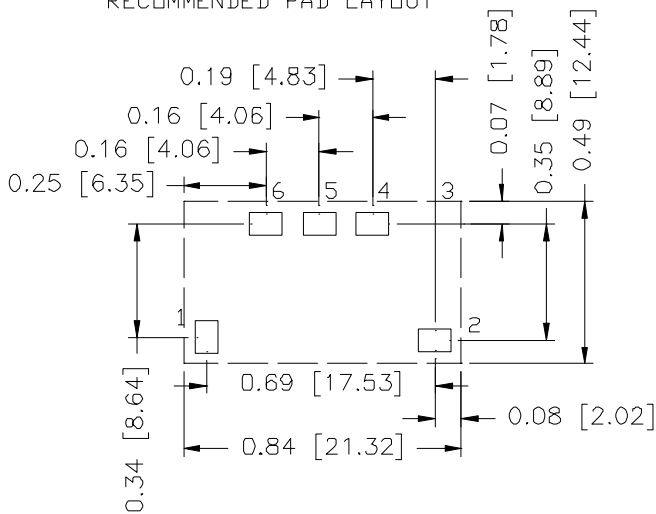

Pin Connections

Pin	Function
1	Remote On/Off
2	Vin+
3	N/A
4	Ground
5	Trim
6	Vout+

Note: These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 245 °C.

NON-ISOLATED DC/DC CONVERTERS

4.5 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

Revision History

Date	Revision	Changes Detail	Approval
2007-01-12	A	add a note under P/N Part	Lynn
2009-04-27	B		HL
2011-08-25	C	Update the reflow solder temperature.	HL
2013-01-25	D	Update UL.	HL

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2013 Bel Fuse Inc. Specifications subject to change without notice. 012513

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com