


Assembly Instructions


1) Strip the cable to the dimensions shown. Take care not to nick the centre conductor or braid. Remove all exposed foil and fold braid back over outer jacket.

A = 5mm
B = 7mm
C = 8mm

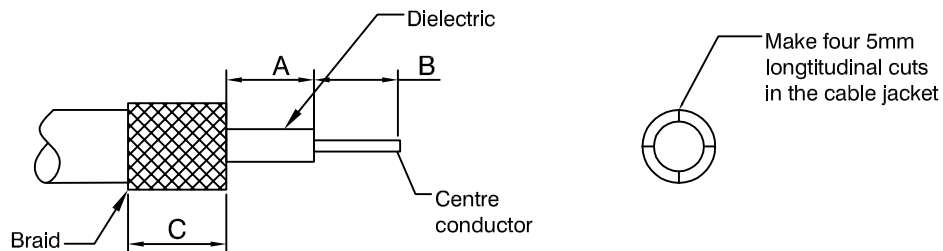


2) Apply the connector to the cable ensuring that the centre conductor and dielectric are inside the inner ring.

Apply application tool to the connector coupling nut. Grip the cable with pliers about 70mm from the stripped end. push and rotate the application tool in a clockwise direction until the connector is fully in position (this has been achieved when the cable dielectric is flush with the connector interface).

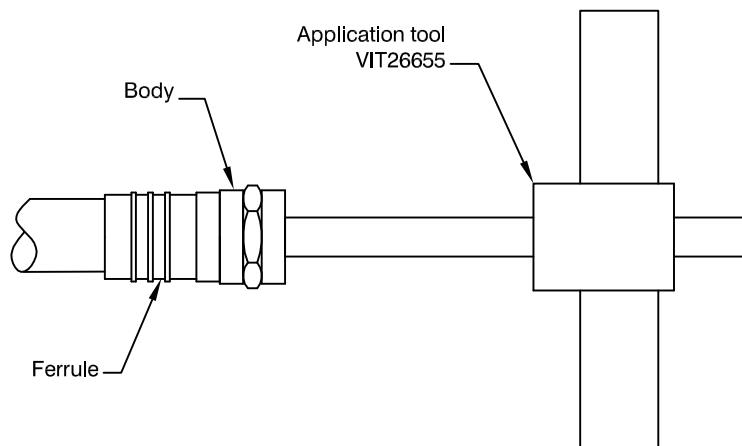

3) Crimp connector then trim the centre conductor as shown if required.

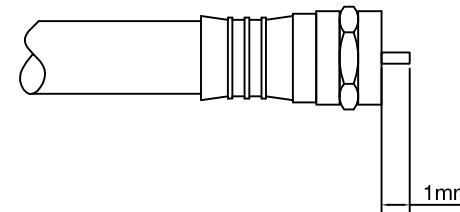

CAD Issue	SN	2	13 July 01
First Issue	IS	1	02 Nov 98
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions, Ltd
11 Bilton Road
Chelmsford
Essex CM1 2UP, England
T: +44 (0) 1245 342060
F: +44 124 535 8938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:

DRAWN BY:

S Nash

CHECKED BY:

P Couzens

APPROVED BY:

R Drennan

DATE:

13 July 01

DESCRIPTION:

Stripping and Assembly
Instructions for F Crimp Plug

DRAWING NUMBER:

VAIF1103

PAGE: 1 OF 1