

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input 0.75 Vdc - 5.0 Vdc/10 A Output

Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


VRBC-10A1Ax

RoHS Compliant

Rev.D

Features

- Non-Isolated
- High Efficiency
- Fixed Frequency
- Low Cost
- Industrial Temperature Range
- Over Temperature Shutdown
- Wide Input
- UL60950-1 Recognized (UL/cUL)
- Certificated to UL60950-1/CSA C22.2 No.60950-1, 2rd edition, am1
- Class 2, Category 2, Non-Isolated DC/DC Converter (refer to IPC-9592A)
- Under Voltage Lockout (UVLO)
- OCP/SCP
- Remote Sense
- Wide Trim
- Remote On/Off
- Remote On/Off Logic
- Output Voltage Prebias

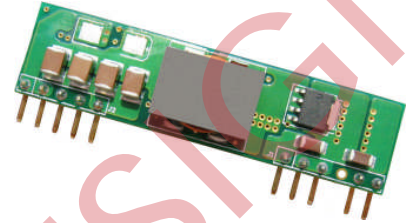

Applications

- Networking
- Computers and peripherals
- Telecommunications

Description

The Bel VRBC-10A1Ax modules are series of the non-isolated dc/dc converters. The modules use a SIP package. These converters are available in a range of output voltages from 0.75 Vdc to 5.0 Vdc over a wide range of input voltage ($V_{in} = 8.3 \text{ Vdc} - 14 \text{ Vdc}$). The efficiency is typically 95% @ 5.0 Vout at full load.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 V - 5.0 V	8.3 V - 14 V	10 A	50.0 W	95%	VRBC-10A1AL	VRBC-10A1A0

Notes: 1. Add "G" suffix at the end of the model number to indicate "Tray Packaging".
2. Add "H" suffix at the end of the model number to indicate Tray packaging and RoHS compliant without requiring exemption 7c-III.

Part Number Explanation

$\frac{V}{1} \frac{R}{2} \frac{BC}{3} - \frac{10}{4} \frac{A}{5} \frac{1A}{6} \frac{x}{7}$

1---Vertical mount

2--- RoHS 6, change "R" to "7" means RoHS 5

3---Series name

4---Series code

5---Wide input range (8.3-14V)

6---Wide trim

7---Option, "x" of the model part number to be 0-9, A-Z, which will represent the special request of customer.

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input 0.75 Vdc - 5.0 Vdc/10 A Output



Jan. 25, 2013

Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Note: All specifications are typical at 25 °C unless otherwise stated.

Input Specifications

Parameter	Min	Typ	Max	Notes
Operating Input Voltage	$V_o \leq 3.63 \text{ V}$ 8.3 V	12 V	14 V	
	$V_o > 3.63 \text{ V}$ 8.3 V	12 V	13.2 V	
Input Current (full load)	-	-	6.5 A	An input line fuse must always be used.
Input Current (no load)	-	80 mA	-	
Remote Off Input Current	-	2 mA	-	
Input Reflected Ripple Current (pk-pk)	-	100 mA	-	Tested with one 1000 uF/25 V Aluminum capacitor with ESR=0.03 ohm max and 4 x 47 uF/16 V Tantalum capacitors with ESR=0.013 ohm max at 100 kHz, & simulated source impedance of 1000 nH, 5 Hz to 20 MHz.
Input Reflected Ripple Current (rms)	-	30 mA	-	
I^2t Inrush Current Transient	-	0.2 A ² s	0.4 A ² s	
Turn-on Voltage Threshold	-	7.9 V	-	
Turn-off Voltage Threshold	-	7.8 V	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2% $V_{o,set}$	-	2% $V_{o,set}$	$V_{in}=12 \text{ V}$, full load
Load Regulation	-	0.3% $V_{o,set}$	-	
Line Regulation	-	0.2% $V_{o,set}$	-	
Regulation Over Temperature (-40 °C to +85 °C)	-	0.4% $V_{o,set}$	-	$T_{ref}=T_{amin}$ to T_{amax}
Output Current	0 A	-	10 A	
Current Limit Threshold	-	200% I_o	-	
Short Circuit Surge Transient	-	1 A ² s	3 A ² s	
Ripple and Noise (pk-pk)	-	40 mV	100 mV	0-20 MHz BW, with 10 uF tantalum capacitor & 1 uF ceramic capacitor
Ripple and Noise (rms)	-	20 mV	40 mV	
Turn on Time	-	7 mS	10 mS	
Overshoot at Turn on	-	-	1% $V_{o,set}$	
Output Capacitance	0 uF	-	5000 uF	

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Output Specifications (continued)

Parameter	Min	Typ	Max	Notes
Transient Response				
50% ~ 100% Max Load	Vo = 0.75 V - 5 V	-	100 mV	di/dt=2.5 A/uS; Vin=12 V; and with 470 uF Tantalum capacitors at the output
Settling Time		-	50 uS	
100% ~ 50% Max Load		-	100 mV	
Settling Time		-	50 uS	


Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=12 V, full load
Vo=5.0 V	-	95%	-	
Vo=3.3 V	-	93%	-	
Vo=2.5 V	-	92%	-	
Vo=1.8 V	-	90%	-	
Vo=1.5 V	-	89%	-	
Vo=1.2 V	-	87.5%	-	
Vo=0.75 V	-	81%	-	
Switching Frequency	265 kHz	300 kHz	335 kHz	
Over Temperature Shutdown ¹	-	130 °C	-	
Output Voltage Trim Range	0.7525 V	-	5.0 V	
Remote Sense Compensation	-	-	0.5 V	
MTBF	5,114,191 hours			Calculated Per Bell Core SR-332 (Io = 80% Load; Vo=3.3 V; Vin=12 V; Ta = 25°C)
Dimensions				
Inches (L x W x H)	2.0 x 0.5 x 0.32			
Millimeters (L x W x H)	50.8 x 12.7 x 8.13			
Weight	-	7.1 g	-	

Notes: All specifications are typical at 25 °C unless otherwise stated.

- The Tref temperature measurement location:

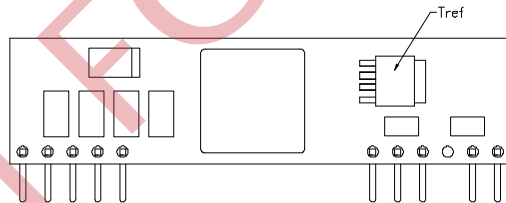

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.2 V	-	0.3 V	VRBC-10A1A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	-	-	Vin, max	
Signal Low (Unit On)	-0.2 V	-	0.3 V	VRBC-10A1AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	2.5 V	-	Vin, max	

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output

bel


Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Output Trim Equations


Equation for calculating the trim resistor (in Ω) given the desired adjusted voltage (V_o) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \left[\frac{10500}{V_o - 0.7525} - 1000 \right]$$

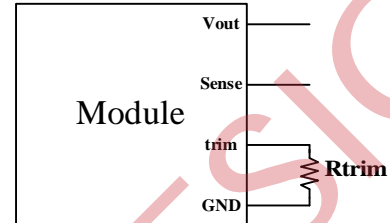


Equation for calculating the trim voltage (in V) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{trim} = \{0.7 - 0.0667 \times (V_o - 0.7525)\}$$

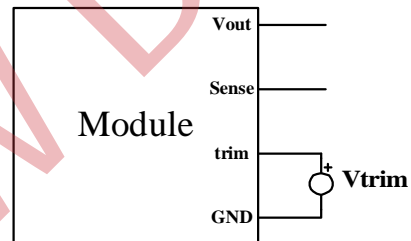

Thermal Derating Curve

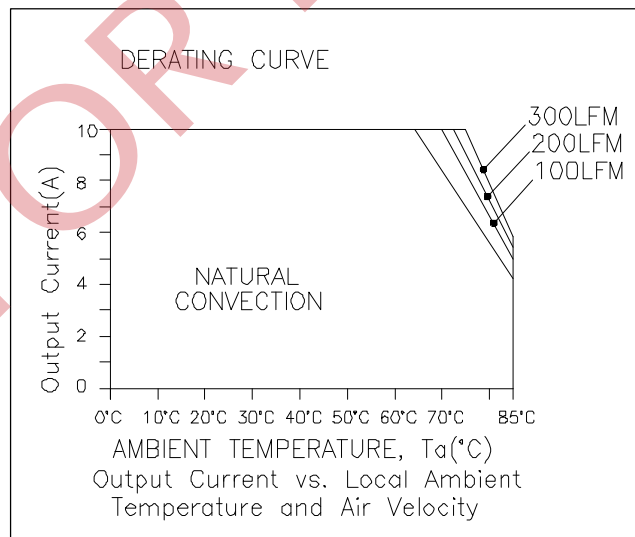

$V_{in}=12.0\text{ V}$, $V_o = 3.3\text{ V}$

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input




0.75 Vdc - 5.0 Vdc/10 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Efficiency Data

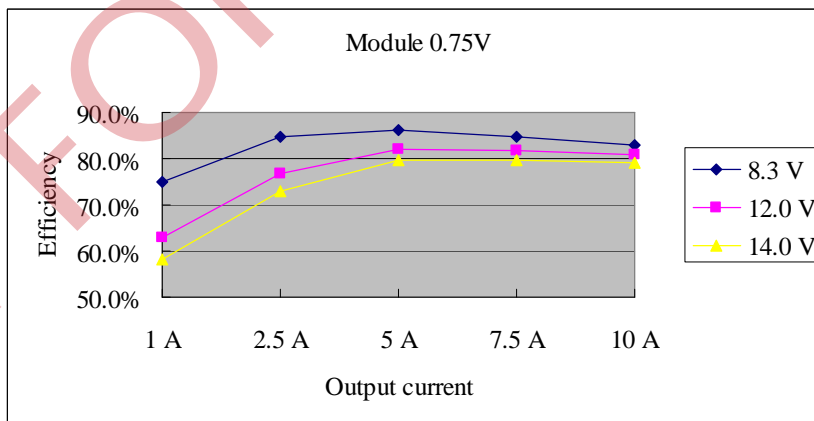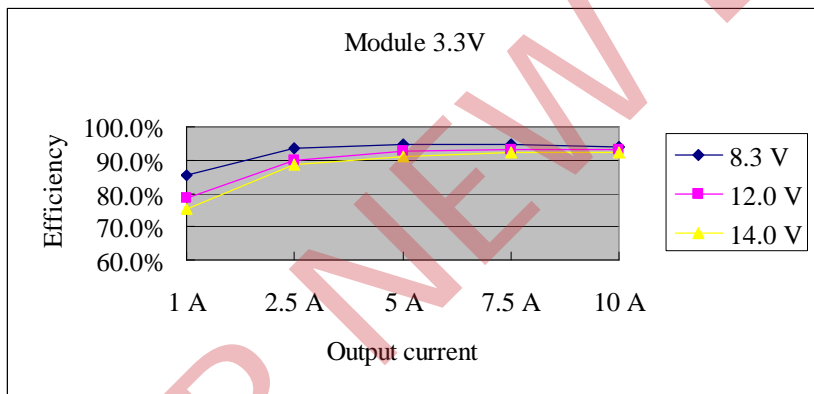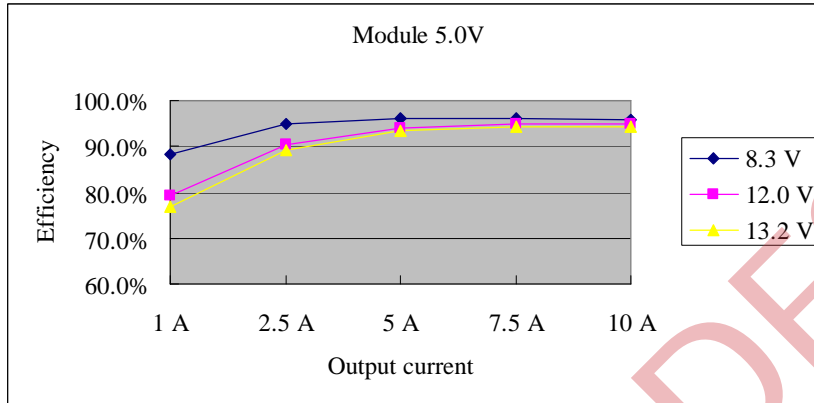

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/10 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Ripple and Noise Waveforms

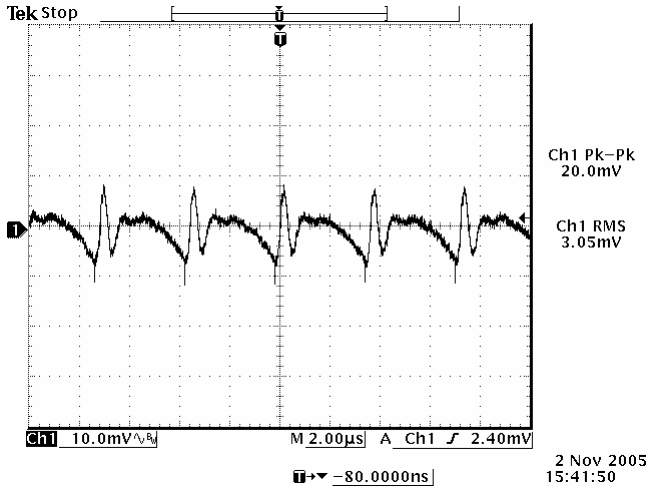

Ripple and noise at full load, 0.75 V output

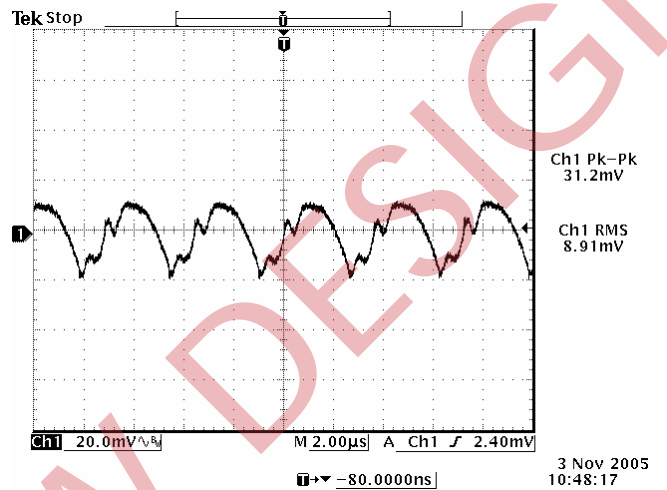

Ripple and noise at full load, 3.3 V output

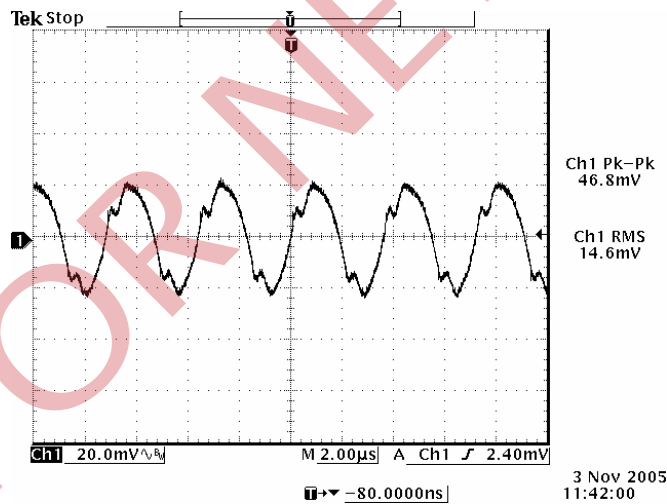

Ripple and noise at full load, 5.0 V output

Note: Ripple and Noise at external load with 10 μ F tantalum capacitor and 1 μ F ceramic on output, $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input



0.75 Vdc - 5.0 Vdc/10 A Output



Jan. 25, 2013



Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Transient Response Waveforms

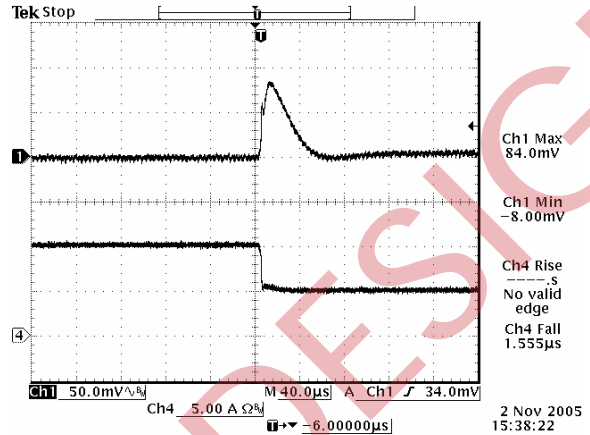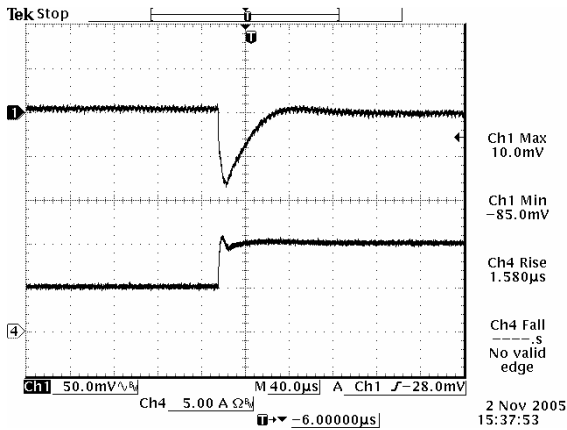



50% to 100% load transient at 0.75 Vdc output

100% to 50% load transient at 0.75 Vdc output

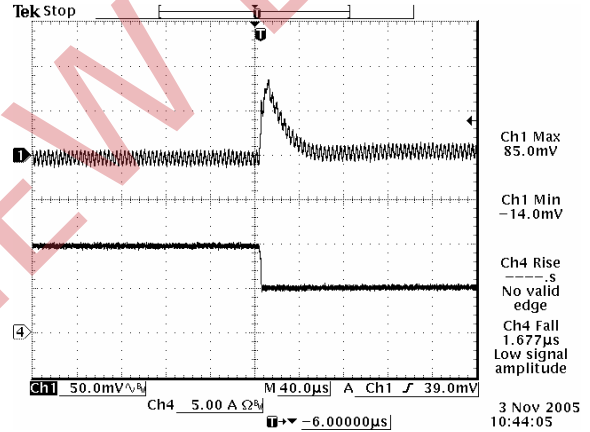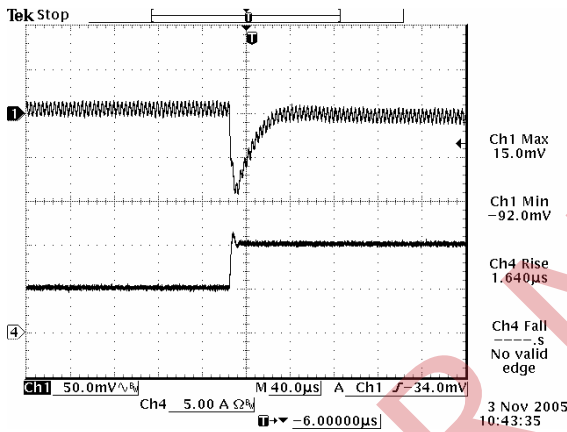

50% to 100% load transient at 3.3 Vdc output

100% to 50% load transient at 3.3 Vdc output

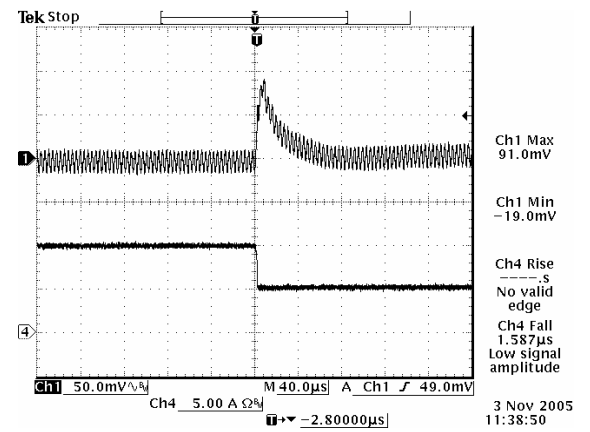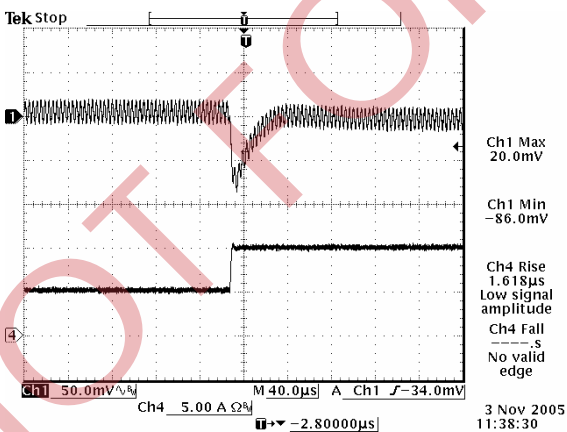

50% to 100% load transient at 5.0 Vdc output

100% to 50% load transient at 5.0 Vdc output

Note: Transient response at $V_{in}=12$ V, $di/dt=2.5$ A/uS, external load with 470 uF tantalum capacitor at the output, and $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input



0.75 Vdc - 5.0 Vdc/10 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Mechanical Outline

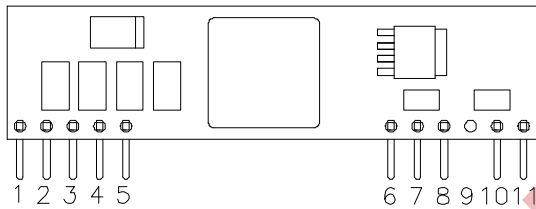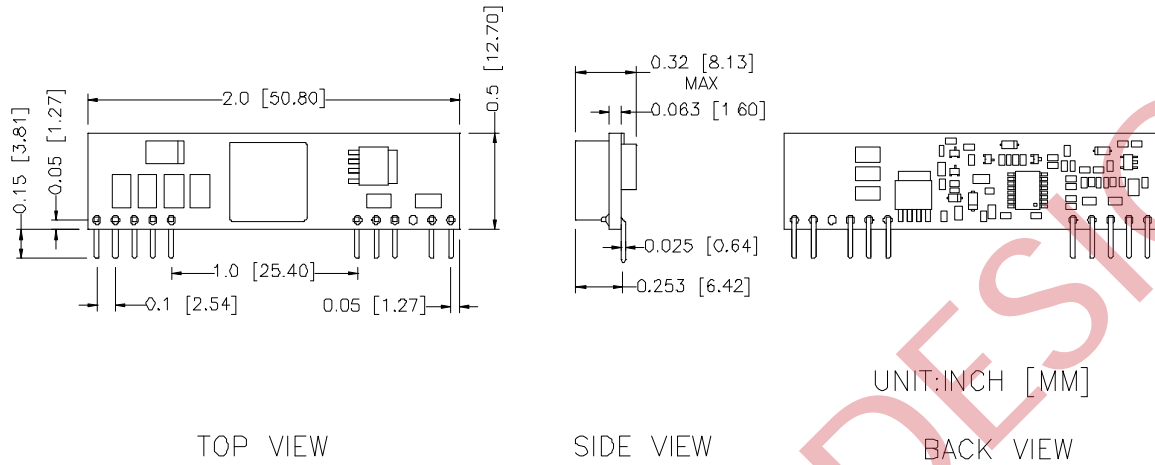

RECOMMENDED PAD LAYOUT

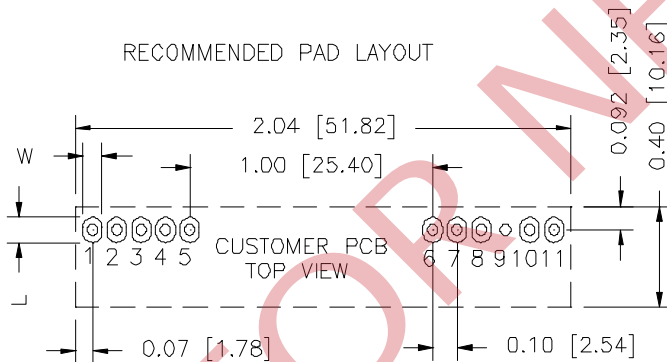

HOLE SIZE: $\varnothing 0.043 \pm 0.003$ [1.08 \pm 0.08]
 PAD SIZE: W 0.063 ± 0.002 [1.63 \pm 0.05]
 L 0.10 ± 0.004 [2.54 \pm 0.10] BOTH SIDE

Pin Connections

Pin	Function
1	Vo
2	Vo
3	Vo, sense
4	Vo
5	GND
6	GND
7	Vin
8	Vin
9	N/A
10	Trim
11	On/Off

Note: This module is recommended and compatible with Pb-Free Wave Soldering and must be soldered using a peak solder temperature of no more than 260 °C for less than 5 seconds.

Note:

- 1) All Pins: Material - Copper Alloy;
Finish – 3 micro inches minimum Gold over 50 micro inches minimum Nickel plate.
- 2) Undimensioned components are shown for visual reference only.
- 3) All dimensions in inches (mm); Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm) x.xxx +/-0.010 in. (x.xx +/-0.25mm).

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Revision History

Date	Revision	Changes Detail	Approval
2005-10-11	VP1	First Release	LY Chen
2006-05-10	VP2	add NR&TR,picture	LY Chen
2007-01-17	A	Add a note about RoHS 5	LY Chen
2007-08-08	B	Per HQ's comment update turn on time	HQ
2012-07-04	C	Adding the 7C-III compliance suffix statement.	HL
2013-01-25	D	Update UL.	HL

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2013 Bel Fuse Inc. Specifications subject to change without notice. 012513

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com