



SERIES: PLDA60 | DESCRIPTION: LED DRIVER
FEATURES

- up to 60 W continuous power
- universal input range (90~305 Vac)
- single/dual output
- dimming options: PWM, 1~10 Vdc, resistive, DALI
- power factor correction ≥ 0.9
- constant current
- low profile for easy installation
- IP67 rated
- over voltage, continuous short circuit, and over temperature protection
- UL 8750, IEC/EN61347-2-13 approval
- EN61000-3-2 Class C (harmonic current) approval
- efficiency up to 86%
- suitable for LED lighting and signage applications

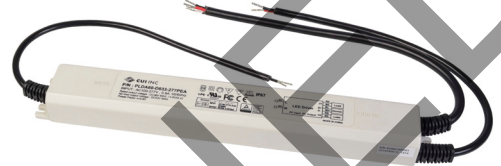

MODEL	output voltage range ¹		output current (mA)	output power max (W)	ripple and noise ² max (mVp-p)	efficiency typ (%)
	min (Vdc)	max (Vdc)				
PLDA60-1250-277	9	48	1250	60	480	86
PLDA60-1666-277	9	36	1666	60	360	85
PLDA60-2500-277	9	24	2500	60	240	85
PLDA60-D625-277	9	48	Io1 625 Io2 625	30 30	480	87
PLDA60-D833-277	9	36	Io1 833 Io2 833	30 30	360	85
PLDA60-D1250-277	9	24	Io1 1250 Io2 1250	30 30	240	85

Notes: 1. constant current region
2. ripple and noise are measured at 20MHz bandwidth with a 0.1uF ceramic capacitor and 10uF aluminum capacitor.

PART NUMBER KEY

PLDA60 - XXXXX - 277XXA

Base Number

Output
"blank" = single
D = dual

Output Current

Input Voltage
277 = (90~305 Vac)

Dimming
PE = PWM, 1~10 Vdc, resistive
D = DALI
"blank" = no dimming

IP Rating
A = IP67

INPUT

parameter	conditions/description	min	typ	max	units
voltage		90 127		305 420	Vac Vdc
frequency		50		60	Hz
current	at 115 Vac, full load at 230 Vac, full load		0.69 0.32		A A
inrush current	at 240 Vac, cold start, 25°C, after 100 μ s			5	A
leakage current	at 277 Vac			0.75	mA
power factor correction	at 115 Vac/230 Vac, 75~100% load	0.9			
no load power consumption				1	W

OUTPUT

parameter	conditions/description	min	typ	max	units
current line regulation	measured from high line to low line at full load			± 5	%
current load regulation	measured from min. to max. of constant current region			± 5	%
constant current accuracy	at nominal input and full load			± 5	%
switching frequency			60		kHz
start-up time	at 90 Vac			0.5	s
temperature coefficient			± 0.05		%/°C

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	TVS clamp				
short circuit protection	hiccup mode, auto recovery				
over temperature protection			105		°C

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output, for 1 minute			3,750	Vac
isolation resistance	input to output	100			M Ω
safety approvals	UL8750, IEC/EN61347-1, IEC/EN61347-2-13, PSE				
DALI	IEC62386-102, IEC62386-207				
EMI/EMC	FCC Part 15 Class B/EN55015, EN61547, EN61000-4-(2,3,4,5,6,8,11), EN61000-3-2 Harmonic Class C, EN61000-3-3				
MTBF	as per MIL-HDBK-217F, at 25°C		200,000		hours
RoHS	2011/65/EU				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-40		70	°C
storage temperature		-40		85	°C
operating altitude				3,000	m

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	10.315 x 1.575 x 0.992 (262 x 40 x 25.2 mm)				inches
weight			530		g

MECHANICAL DRAWING


SINGLE OUTPUT MODELS

units: inches[mm]
tolerance: ±0.02[±0.5]
unless otherwise specified

INPUT WIRE CONNECTIONS	
Color	Function
Black	ACL
White	ACN

OUTPUT WIRE CONNECTIONS	
Color	Function
Red	+Vo
Black	-Vo
Blue ¹	+Dimming (D+/DA+)
White ¹	-Dimming (D-/DA-)

Note: 1. wires present on dimming models only. PE models are marked with "D", DALI models are marked with "DA".

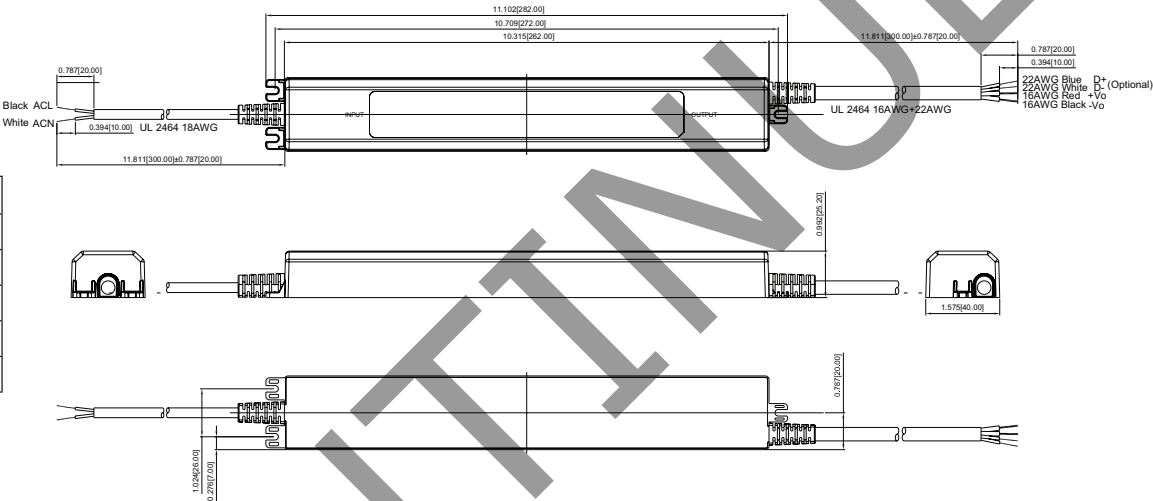


DUAL OUTPUT MODELS

units: inches[mm]
tolerance: ±0.02[±0.5]
unless otherwise specified


INPUT WIRE CONNECTIONS	
Color	Function
Black	ACL
White	ACN

OUTPUT WIRE CONNECTIONS	
Color	Function
Red	+Vo1
Black	-Vo1
Blue ¹	+Dimming (D+/DA+)
White ¹	-Dimming (D-/DA-)
Red	+Vo2
Black	-Vo2


Note: 1. wires present on dimming models only. PE models are marked with "D", DALI models are marked with "DA".

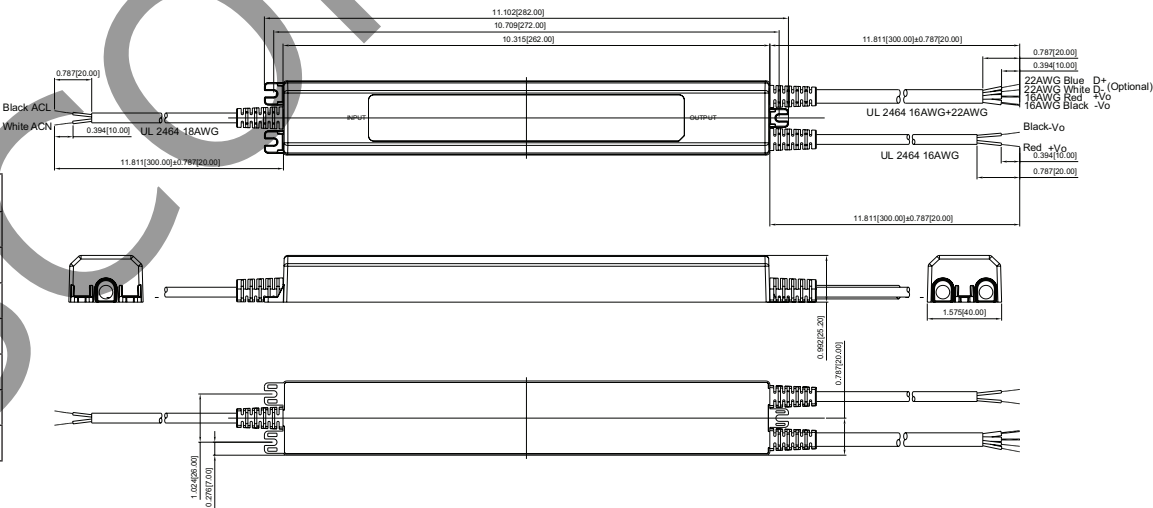

DERATING CURVES

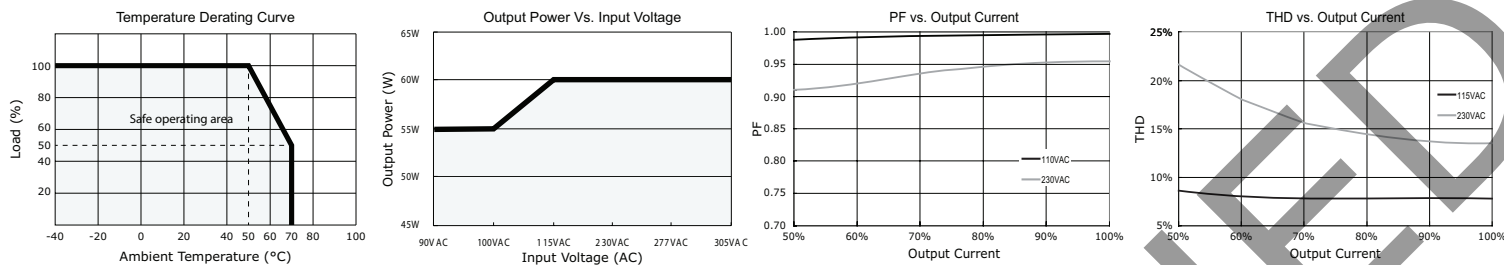


EFFICIENCY CURVES

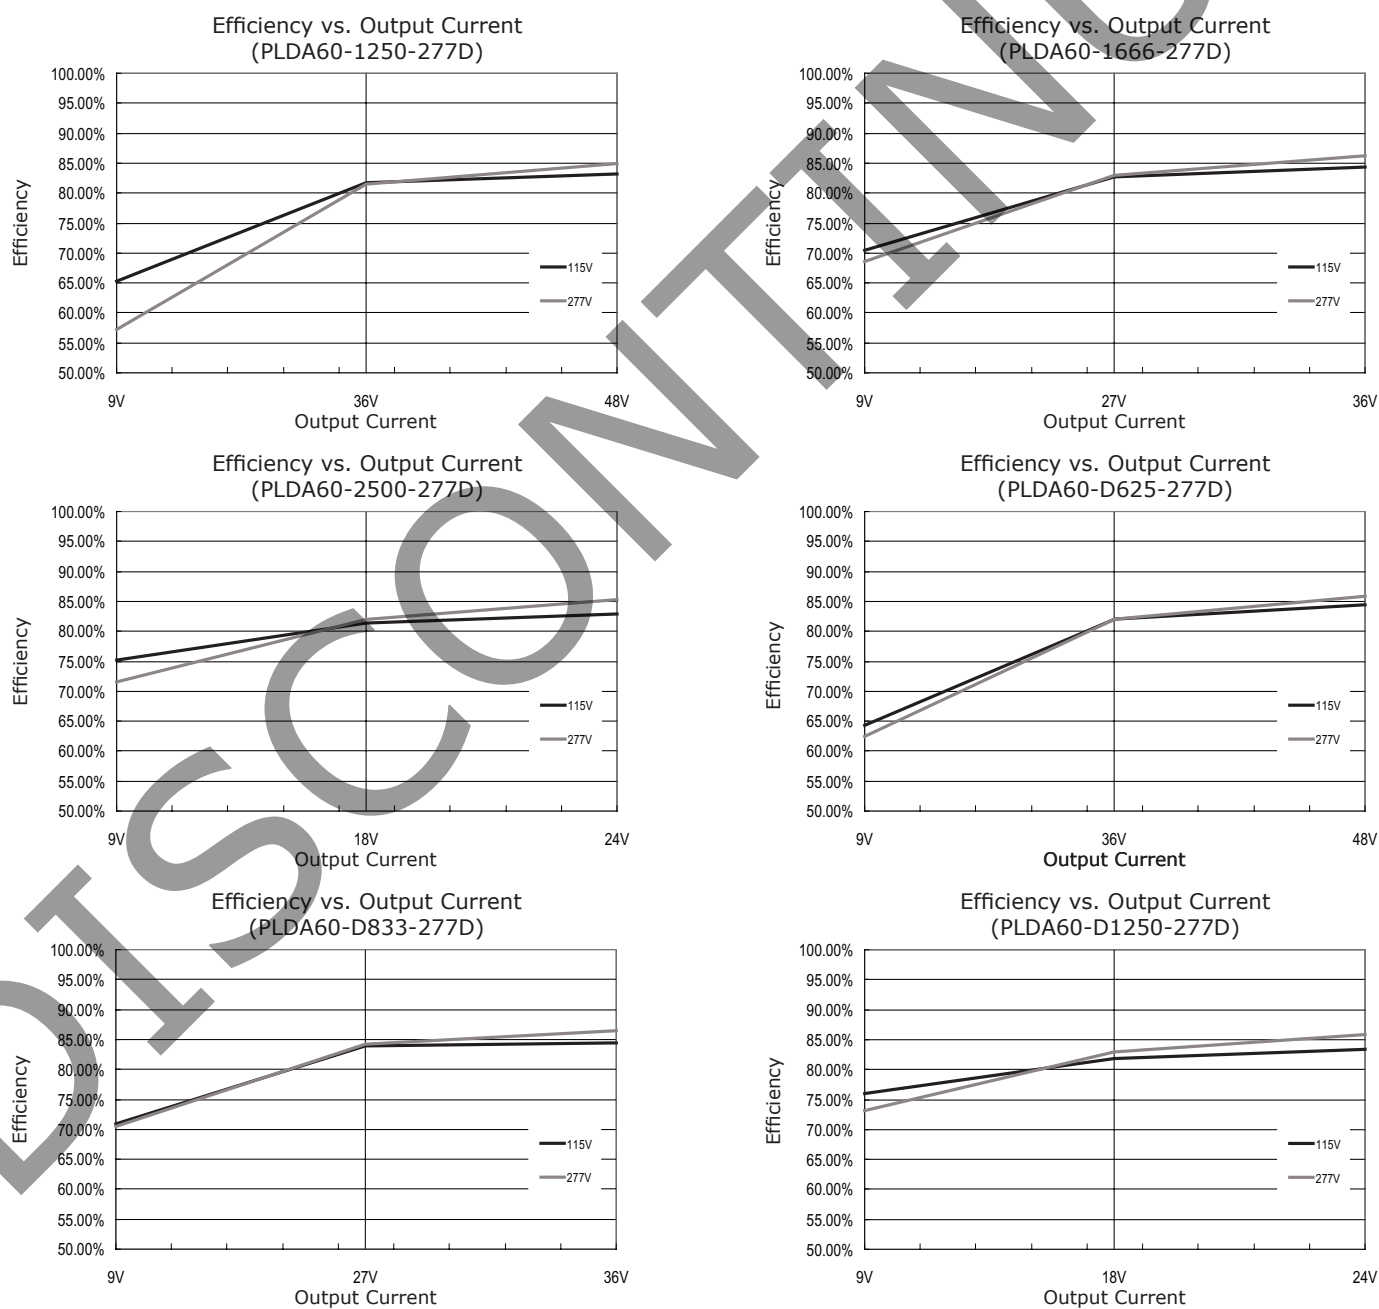

APPLICATION NOTES

1. Dimming

Dimming should be controlled from the dimming controller with DALI, PWM, 1~10 Vdc, or resistive. Set the DALI controller to "broadcast mode" when connecting to the LED driver, since it will not be addressed in production.

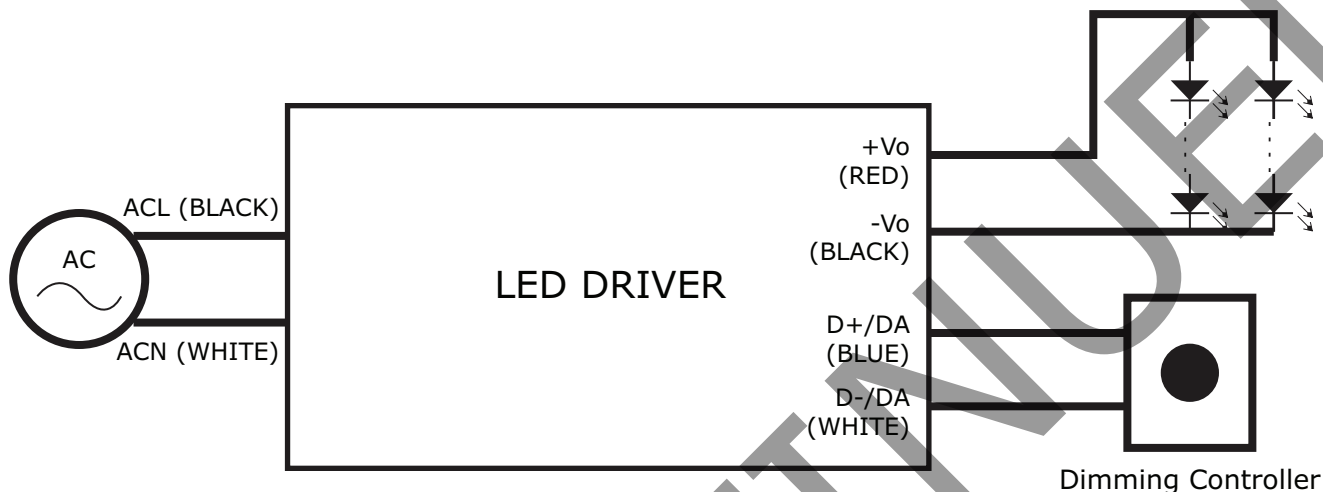

1~10 Vdc Dimming

Voltage	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V (Open)
Output Current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

Potentiometer Dimming

Potentiometer	1K	2K	3K	4K	5K	6K	7K	8K	9K	10K (Open)
Output Current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

PWM Dimming (@ 1kHz, 10V)

Duty Cycle	10%	20%	30%	40%	50%	60%	70%	80%	90%	100% (Open)
Output Current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

Note: 1. All specifications are measured at Ta=25°C, 115/230 Vac input voltage, and full load unless otherwise specified.

REVISION HISTORY

rev.	description	date
1.0	initial release	09/23/2014
1.01	updated datasheet	03/13/2015

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC®**

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.