

SERIES: VGD-75 | DESCRIPTION: AC-DC POWER SUPPLY

FEATURES

- universal input voltage range (90~264 Vac)
- provides dual outputs; independently isolated
- short circuit, over current and over voltage protections
- safety certified: IEC/EN/UL 62368
- designed to meet: IEC/EN/UL 60335
- class B EMI performance, meets CISPR32 / EN 55032



MODEL	output voltage (Vdc)	output current		output power ¹ max (W)	ripple and noise ² max (mVp-p)	efficiency typ (%)
		min (A)	max (A)			
VGD-75-D512	5	0.7	7	71	80	82
	12	0.3	3		120	
VGD-75-D524	5	0.5	5	73	80	84
	24	0.2	2		150	

Notes: 1. Maximum total combined power.
2. Ripple & noise are measured at 20 MHz BW with 47 µF aluminum electrolytic capacitor and 0.1 µF ceramic capacitor on the output.

PART NUMBER KEY



INPUT

parameter	conditions/description	min	typ	max	units
voltage		90 120		264 373	Vac Vdc
frequency		47		63	Hz
input current	115 Vac 230 Vac			1.7 0.9	A A
inrush current	115 Vac, full load, cold start 230 Vac, full load, cold start		30 45		A A

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation	Vo1, full load Vo2, full load		±0.5 ±1.5	±1.0	% %
load regulation	Vo1, 10 ~ 100% (balanced load) Vo2, 10 ~ 100% (balanced load)		±0.5 ±5.0		% %
temperature coefficient			±0.03		%/°C
hold-up time	115 Vac, full load 230 Vac, full load	5 30			ms ms
adjustability	adjustable with built-in trim pot ¹	4.75		5.5	V
output voltage accuracy	Vo1, full load range Vo2, full load range		±2.0 ±8.0		% %

Note: 1. Adjustment of 5 V output only.

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	hiccup mode	5.75		6.75	V
overload protection	hiccup mode, automatically recovers	110			%
short circuit protection	hiccup, continuous, self-recovery				

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output input to ground output to ground output Vo1 - output Vo2		3,000 2,000 500 500		Vac Vac Vac Vdc
isolation resistance	input to output at 500 Vdc @ 25°C	100			MΩ
safety approvals	IEC/EN/UL62368 designed to meet EN60335				
safety class	Class I				
conducted emissions	CISPR32/ EN55032 Class B				
radiated emissions	CISPR32/ EN55032 Class B				
ESD	IEC/EN61000-4-2, Contact ±6KV / Air ±8KV, perf. Criteria A				
radiated immunity	IEC/EN61000-4-3, 10V/m, perf. Criteria A				
EFT/burst	IEC/EN61000-4-4, ±2KV, perf. Criteria A				
surge	IEC/EN 61000-4-5, Line to Line ±2KV / Line to Ground±4KV, perf. Criteria A				
conducted immunity	IEC/EN61000-4-6, 10 Vrms, perf. Criteria A				

SAFETY & COMPLIANCE (CONTINUED)

parameter	conditions/description	min	typ	max	units
power-frequency magnetic fields immunity	EN 61000-4-8				
voltage dips & interruptions	IEC/EN61000-4-11, 0%,70%, perf. Criteria B				
MTBF	MIL-HDBK-217F at 25°C	300,000			hrs
RoHS	yes				

ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-30		70	°C
storage temperature		-40		85	°C
operating humidity	non-condensing			95	%
storage humidity	non-condensing			95	%

MECHANICAL


parameter	conditions/description	min	typ	max	units
dimensions	129 x 97 x 30 (5.1 x 3.8 x 1.2 inch)				mm
cooling method	free air convection (see derating curve below)				
weight			310		g

DERATING CURVES

TEMPERATURE DERATING CURVE

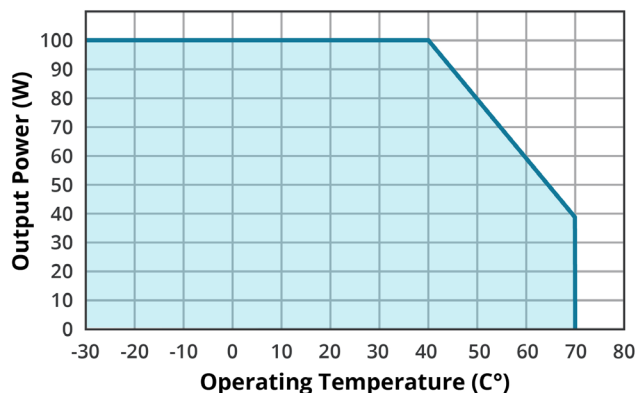


INPUT VOLTAGE DERATING CURVE

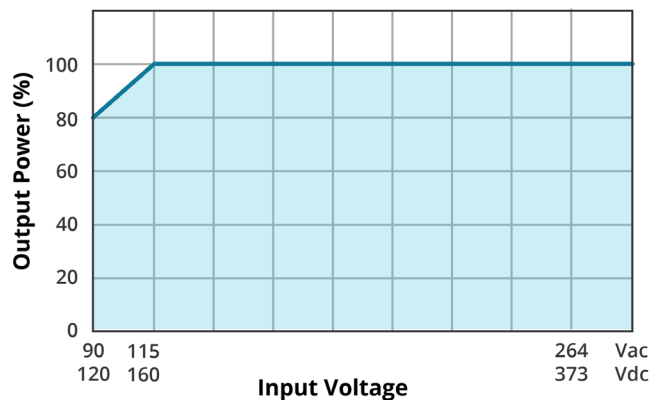


EFFICIENCY CURVES

**EFFICIENCY VS INPUT LOAD
(full load)**

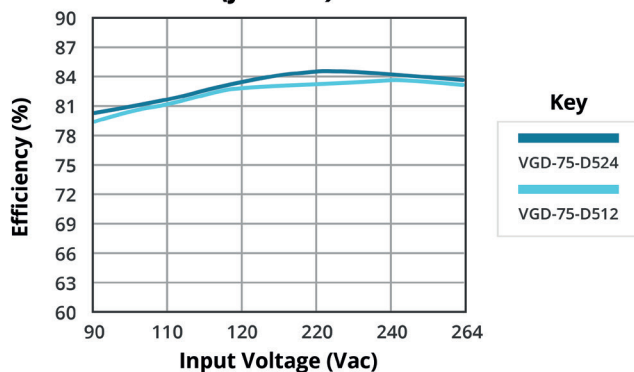

**EFFICIENCY VS OUTPUT LOAD
(at 230 Vac)**

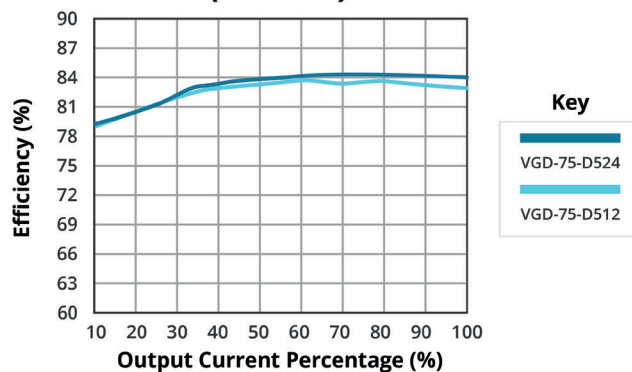

MECHANICAL DRAWING


units: mm [inches]

wire range: 22 - 14 AWG

tightening torque: M3, 0.5 N.m

tolerance: ± 1.0 mm unless otherwise specified

PIN CONNECTIONS	
Pin	Function
1	AC(L)
2	AC(N)
3	$\underline{\underline{\text{E}}}$
4	-Vo2
5	+Vo2
6	-Vo1
7	+Vo1

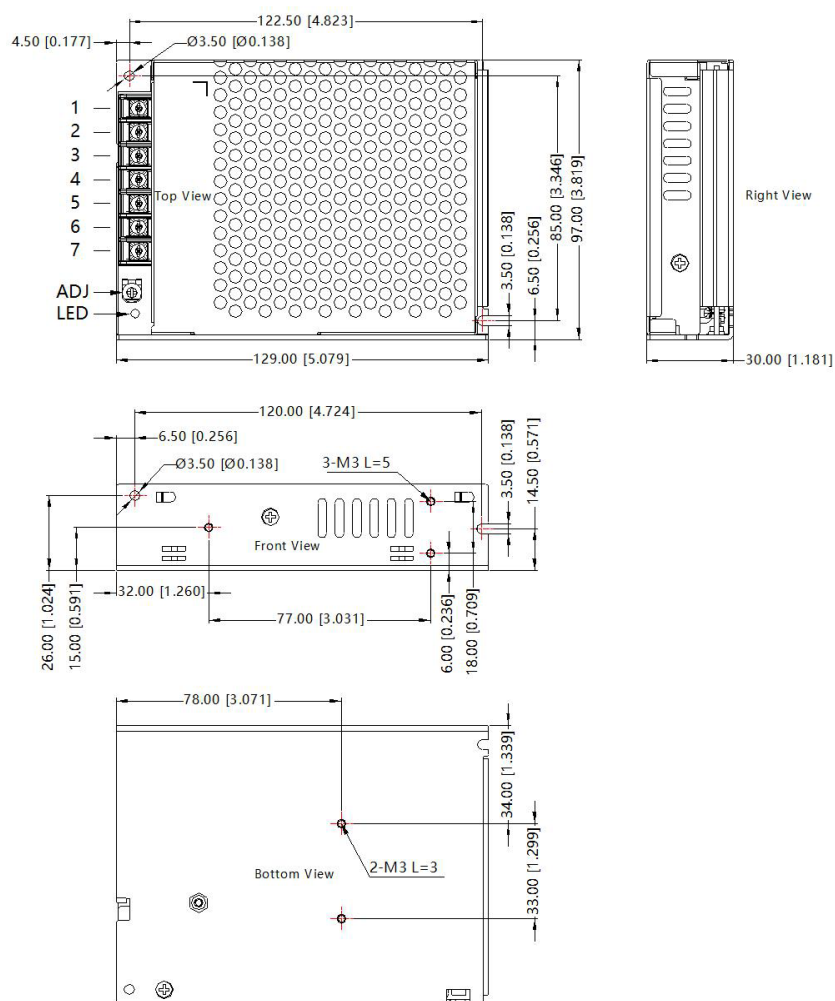

REVISION HISTORY

rev.	description	date
1.0	initial release	11/08/2019
1.01	company logo updated	12/22/2020
1.02	derating and efficiency curves updated	06/10/2021

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC
a bel group

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.