

## SERIES: VHK150W-DIN | DESCRIPTION: DC-DC CONVERTER

### FEATURES


- up to 150 W isolated output
- rugged metal enclosure with integrated heat sink
- 4:1 input range (9~36 Vdc, 18~75 Vdc)
- single output from 5~48 Vdc
- 1,500 Vdc isolation
- over current, over temperature, over voltage, and short circuit protections
- remote on/off
- efficiency up to 90%
- comes with DIN-rail mount



| MODEL               | input<br>voltage<br>range<br>(Vdc) | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple<br>and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br><br>typ<br>(%) |
|---------------------|------------------------------------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|------------------------------|
| VHK150W-Q24-S5-DIN  | 9 ~ 36                             | 5                          | 25                              | 125                           | 100                                                | 87                           |
| VHK150W-Q24-S12-DIN | 9 ~ 36                             | 12                         | 12.5                            | 150                           | 150                                                | 86                           |
| VHK150W-Q24-S15-DIN | 9 ~ 36                             | 15                         | 10                              | 150                           | 150                                                | 86                           |
| VHK150W-Q24-S24-DIN | 9 ~ 36                             | 24                         | 6.5                             | 156                           | 240                                                | 86.5                         |
| VHK150W-Q24-S28-DIN | 9 ~ 36                             | 28                         | 5.4                             | 150                           | 280                                                | 87                           |
| VHK150W-Q24-S48-DIN | 9 ~ 36                             | 48                         | 3.12                            | 150                           | 480                                                | 84                           |
| VHK150W-Q48-S5-DIN  | 18 ~ 75                            | 5                          | 25                              | 125                           | 100                                                | 90                           |
| VHK150W-Q48-S12-DIN | 18 ~ 75                            | 12                         | 12.5                            | 150                           | 150                                                | 88                           |
| VHK150W-Q48-S15-DIN | 18 ~ 75                            | 15                         | 10                              | 150                           | 150                                                | 88                           |
| VHK150W-Q48-S24-DIN | 18 ~ 75                            | 24                         | 6.5                             | 156                           | 240                                                | 87.5                         |
| VHK150W-Q48-S28-DIN | 18 ~ 75                            | 28                         | 5.4                             | 150                           | 280                                                | 89                           |
| VHK150W-Q48-S48-DIN | 18 ~ 75                            | 48                         | 3.12                            | 150                           | 480                                                | 87                           |

Note: 1. Ripple and noise are measured at full load, 20 MHz BW with 10μF tantalum capacitor and 1μF ceramic capacitor across output.

### PART NUMBER KEY

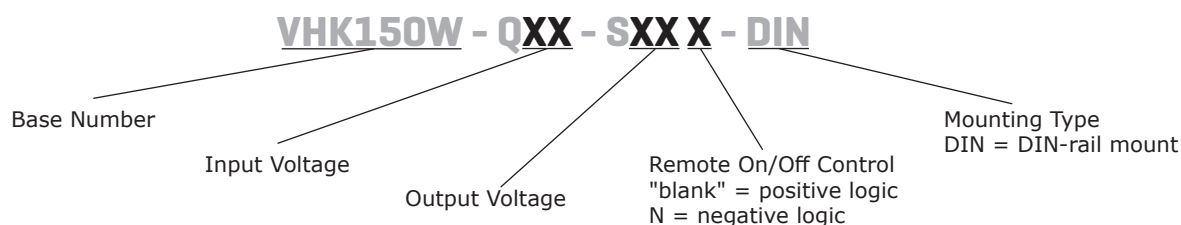

INPUT

| parameter               | conditions/description                                                          |                                       | min | typ      | max | units      |
|-------------------------|---------------------------------------------------------------------------------|---------------------------------------|-----|----------|-----|------------|
| operating input voltage | 24 Vdc input models                                                             |                                       | 9   | 24       | 36  | Vdc        |
|                         | 48 Vdc input models                                                             |                                       | 18  | 48       | 75  | Vdc        |
| under voltage shutdown  | 24 Vdc input                                                                    | power up<br>power down                |     | 8.8<br>8 |     | Vdc<br>Vdc |
|                         | 48 Vdc input                                                                    | power up<br>power down                |     | 17<br>16 |     | Vdc<br>Vdc |
| CTRL <sup>1</sup>       | positive logic                                                                  | models ON (>3.5 Vdc or open circuit)  |     |          |     |            |
|                         |                                                                                 | models OFF (0~1.8 Vdc)                |     |          |     |            |
|                         | negative logic                                                                  | models ON (0~1.8 Vdc)                 |     |          |     |            |
|                         |                                                                                 | models OFF (>3.5 Vdc or open circuit) |     |          |     |            |
| filter                  | pi filter                                                                       |                                       |     |          |     |            |
| input fuse              | 30A time delay fuse for 24 Vin models,<br>15A time delay fuse for 48 Vin models |                                       |     |          |     |            |

Note: 1. Open collector refer to -Vin

OUTPUT

| parameter                     | conditions/description               |  | min | typ   | max    | units |
|-------------------------------|--------------------------------------|--|-----|-------|--------|-------|
| maximum capacitive load       | 5 V output models                    |  |     |       | 30,000 | µF    |
|                               | 12 V output models                   |  |     |       | 12,500 | µF    |
|                               | 15 V output models                   |  |     |       | 10,000 | µF    |
|                               | 24 V input, 24 & 28 V output models  |  |     |       | 1,800  | µF    |
|                               | 48 V input, 24 & 28 V output models  |  |     |       | 2,200  | µF    |
|                               | 48 V output models                   |  | 47  |       | 1,000  | µF    |
| line regulation <sup>2</sup>  | measured from high line to low line  |  |     |       | ±0.2   | %     |
| load regulation <sup>2</sup>  | measured from full load to zero load |  |     |       | ±0.2   | %     |
| voltage accuracy <sup>2</sup> |                                      |  |     |       | ±1.5   | %     |
| adjustability                 |                                      |  |     | ±10   |        | %     |
| switching frequency           |                                      |  |     | 250   |        | kHz   |
| transient response            | 25% step load change                 |  |     |       | 500    | µs    |
| temperature coefficient       |                                      |  |     | ±0.03 |        | %/°C  |

Note: 2. A 47 µF aluminum capacitor is required on the output for 48 Vdc output models.

PROTECTIONS

| parameter                   | conditions/description   |  | min | typ | max | units |
|-----------------------------|--------------------------|--|-----|-----|-----|-------|
| short circuit protection    | continuous               |  |     |     |     |       |
| over current protection     | % nominal output current |  | 110 |     | 140 | %     |
| over voltage protection     |                          |  | 115 |     | 140 | %     |
| over temperature protection | shutdown                 |  |     | 110 |     | °C    |

SAFETY AND COMPLIANCE

| parameter            | conditions/description                                          |  | min   | typ | max | units |
|----------------------|-----------------------------------------------------------------|--|-------|-----|-----|-------|
| isolation voltage    | for 1 minute: input to output; input to case;<br>output to case |  | 1,500 |     |     | Vdc   |
| isolation resistance |                                                                 |  | 10    |     |     | MΩ    |
| RoHS                 | 2011/65/EU (CE)                                                 |  |       |     |     |       |

ENVIRONMENTAL

| parameter             | conditions/description |  | min | typ | max | units |
|-----------------------|------------------------|--|-----|-----|-----|-------|
| operating temperature | see derating curve     |  | -40 |     | 85  | °C    |
| storage temperature   |                        |  | -55 |     | 105 | °C    |

MECHANICAL






| parameter     | conditions/description                       | min | typ | max | units |
|---------------|----------------------------------------------|-----|-----|-----|-------|
| dimensions    | 4.23 x 4.01 x 2.07 (107.5 x 101.8 x 52.6 mm) |     |     |     | inch  |
| case material | steel and aluminum extrusion                 |     |     |     |       |
| weight        |                                              |     | 651 |     | g     |

MECHANICAL DRAWING


units: inch[mm]  
tolerance: X.XX = ±0.02[±0.5]  
              X.XXX = ±0.010[±0.25]

wire range: 22~12 AWG  
screw size: #6-32  
mounts to TS35 rails


| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | +Vin     |
| 2               | -Vin     |
| 3               | REM      |
| 4               | CASE     |
| 5               | +Vo      |
| 6               | +S       |
| 7               | TRIM     |
| 8               | -S       |
| 9               | -Vo      |

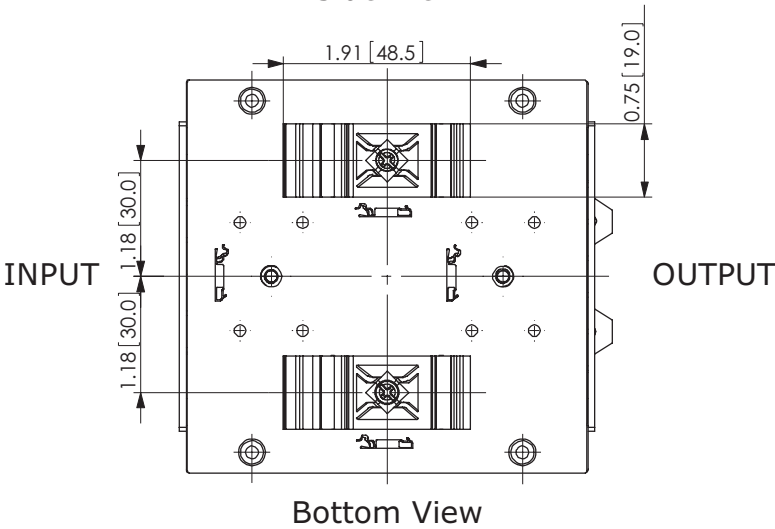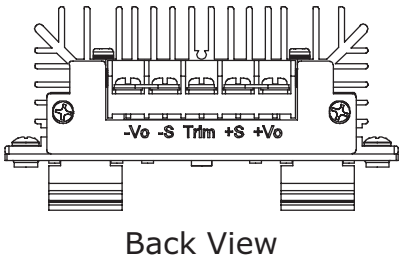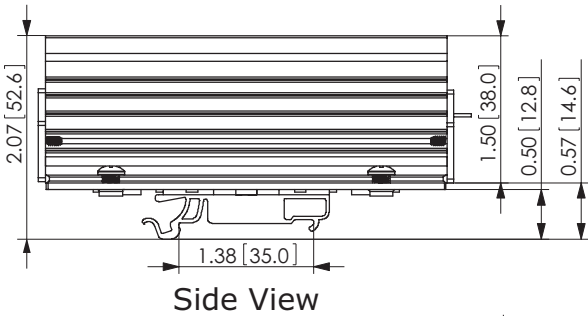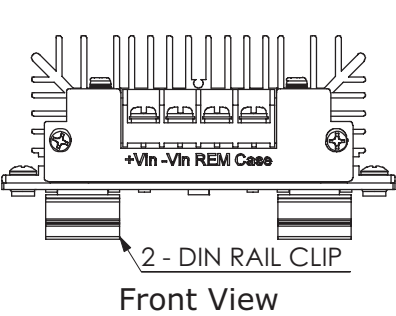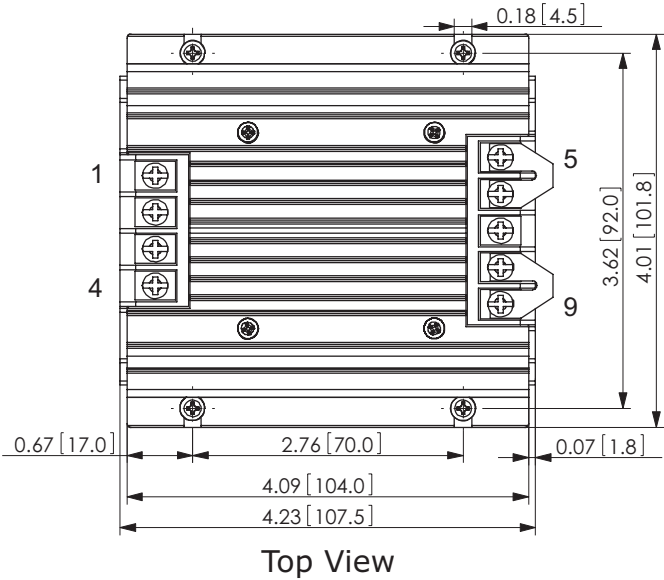

DERATING CURVES

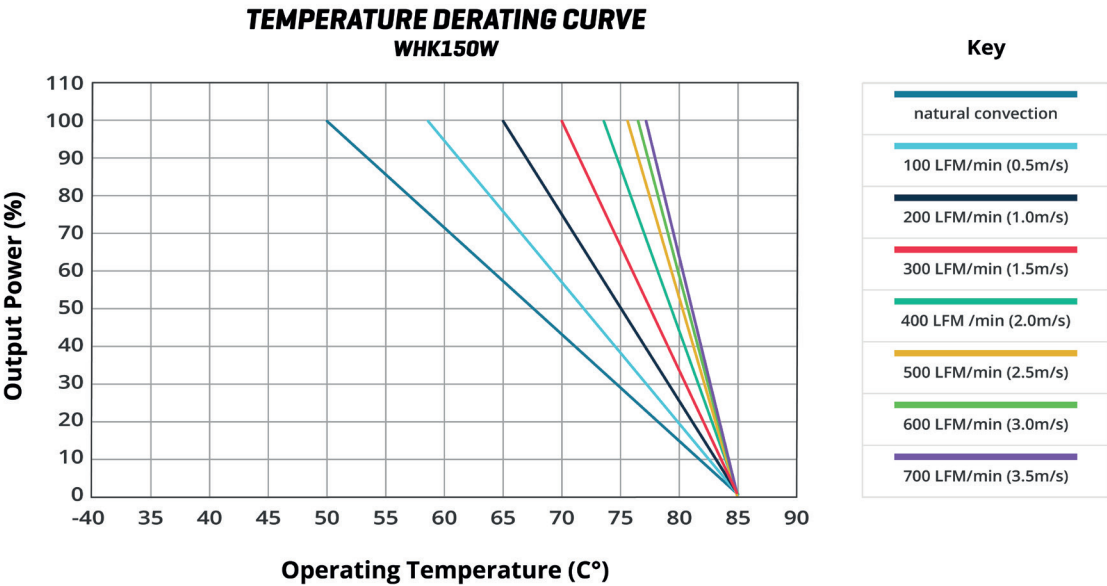

TEST CONFIGURATION

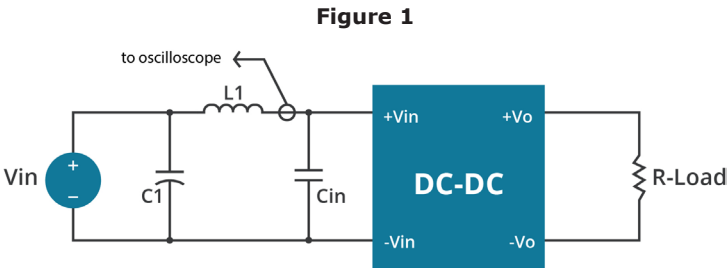

**Table 1**  
**External Components**

| 24 Vdc input models |                              |
|---------------------|------------------------------|
| L1                  | 1.2μH                        |
| C1                  | 220μF, ESR < 0.1Ω at 100 KHz |
| Cin                 | 330μF, ESR < 0.7Ω at 100 KHz |
| 48 Vdc input models |                              |
| L1                  | 12μH                         |
| C1                  | 220μF, ESR < 0.1Ω at 100 KHz |
| Cin                 | 33μF, ESR < 0.7Ω at 100 KHz  |

Note: Input reflected-ripple current is measured with an inductor L1 and Capacitor C1 to simulate source impedance.

EMC RECOMMENDED CIRCUITS

EN55022 CLASS A

Figure 2  
Recommended Circuit for EN55022 Class A

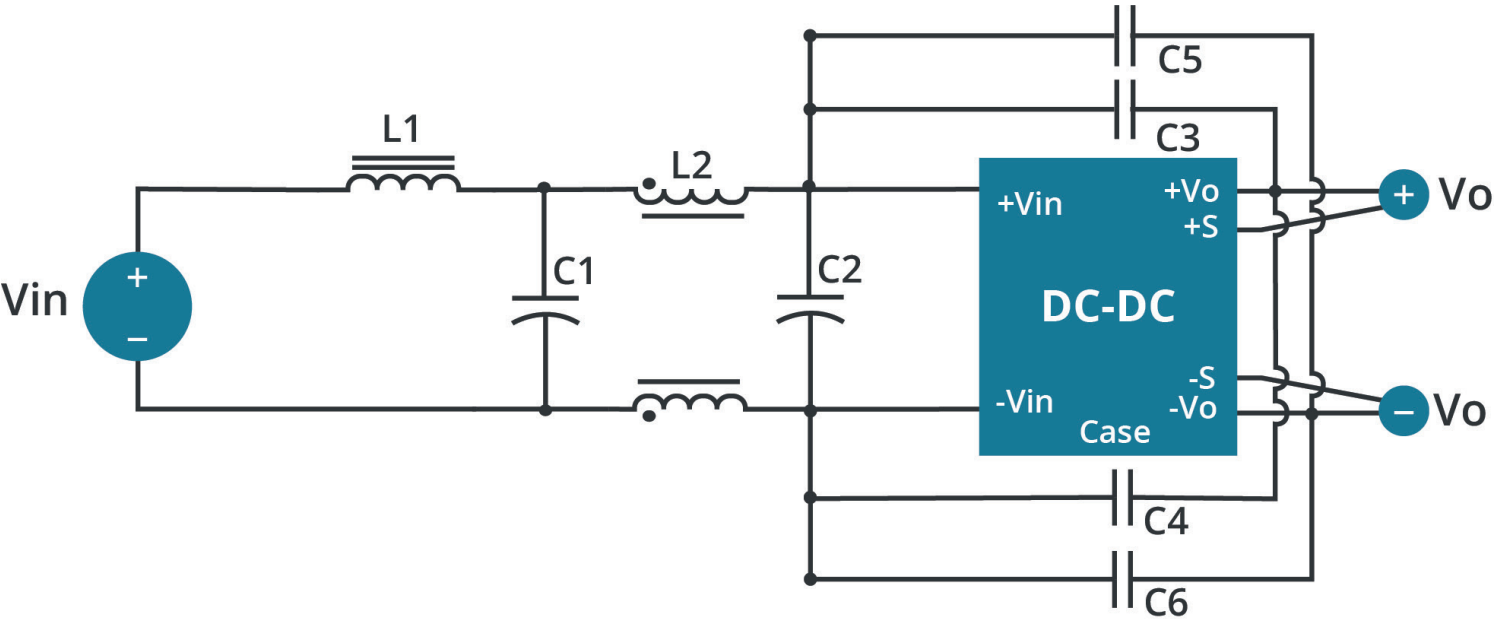


Table 2  
Class A Recommended Components

| Model           | C1 <sup>1</sup> | C2 <sup>1</sup> | C3 <sup>2</sup> | C4 <sup>2</sup> | C5 <sup>2</sup> | C6 <sup>2</sup> | L1    | L2     |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------|--------|
| VHK150W-Q24-S5  | 100 µF/50 V     | 100 µF/50 V     | NC              | NC              | NC              | NC              | SHORT | 0.5 mH |
| VHK150W-Q24-S12 | 100 µF/50 V     | 100 µF/50 V     | NC              | NC              | NC              | NC              | SHORT | 0.5 mH |
| VHK150W-Q24-S15 | 100 µF/50 V     | 100 µF/50 V     | NC              | NC              | NC              | NC              | SHORT | 0.5 mH |
| VHK150W-Q24-S24 | 100 µF/50 V     | 100 µF/50 V     | 680 pF          | 680 pF          | 470 pF          | 680 pF          | SHORT | 0.5 mH |
| VHK150W-Q24-S28 | 100 µF/50 V     | 100 µF/50 V     | 2200 pF         | NC              | 680 pF          | 2200 pF         | SHORT | 0.6 mH |
| VHK150W-Q24-S48 | 100 µF/50 V     | 100 µF/50 V     | 1000 pF         | NC              | 470 pF          | 1000 pF         | SHORT | 0.6 mH |
| VHK150W-Q48-S5  | 47 µF/100 V     | 47 µF/100 V     | NC              | NC              | NC              | NC              | SHORT | 0.5 mH |
| VHK150W-Q48-S12 | 47 µF/100 V     | 47 µF/100 V     | NC              | 680 pF          | NC              | NC              | SHORT | 0.5 mH |
| VHK150W-Q48-S15 | 47 µF/100 V     | 47 µF/100 V     | 680 pF          | 1000 pF         | NC              | NC              | SHORT | 0.5 mH |
| VHK150W-Q48-S24 | 47 µF/100 V     | 47 µF/100 V     | 680 pF          | 680 pF          | 470 pF          | 680 pF          | SHORT | 0.5 mH |
| VHK150W-Q48-S28 | 47 µF/100 V     | 47 µF/100 V     | 2200 pF         | NC              | 680 pF          | 2200 pF         | SHORT | 0.6 mH |
| VHK150W-Q48-S48 | 47 µF/100 V     | 47 µF/100 V     | 2200 pF         | 1500 pF         | 1500 pF         | 2200 pF         | SHORT | 0.5 mH |

Notes: 1. Aluminum capacitor  
2. Ceramic capacitor

EMC RECOMMENDED CIRCUITS (CONTINUED)

EN55022 CLASS B

Figure 3  
Recommended Circuit for EN55022 Class B

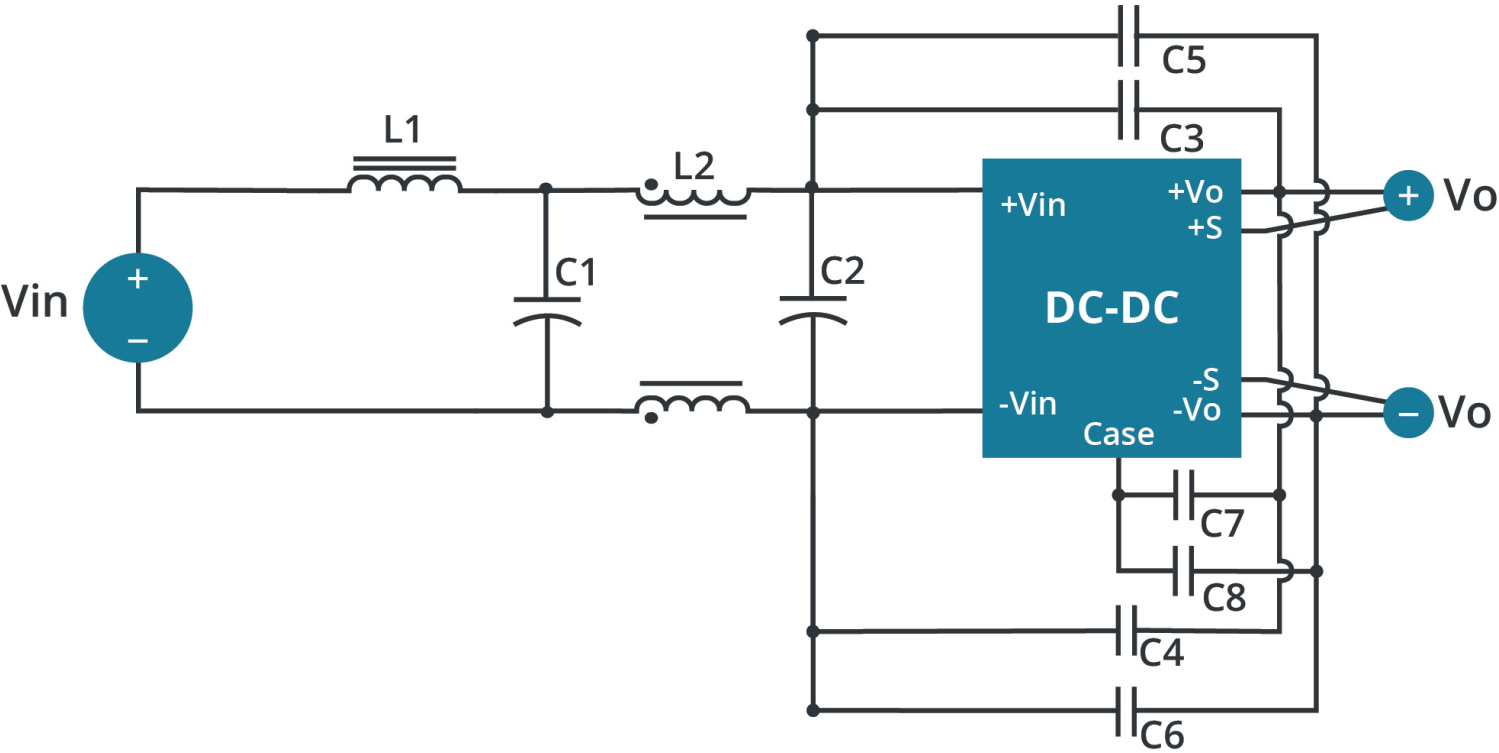


Table 3  
Class B Recommended Components

| Model           | C1 <sup>1</sup> | C2 <sup>1</sup> | C3 <sup>2</sup>  | C4 <sup>2</sup> | C5 <sup>2</sup> | C6 <sup>2</sup>  | C7 <sup>2</sup> | C8 <sup>2</sup> | L1     | L2     |
|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|-----------------|-----------------|--------|--------|
| VHK150W-Q24-S5  | 220 µF/50 V     | 220 µF/50 V     | 680 pF           | NC              | NC              | NC               | NC              | NC              | 3 µH   | 0.5 mH |
| VHK150W-Q24-S12 | 220 µF/50 V     | 220 µF/50 V     | 680 pF           | 680 pF          | NC              | NC               | NC              | NC              | 3 µH   | 0.5 mH |
| VHK150W-Q24-S15 | 220 µF/50 V     | 220 µF/50 V     | 680 pF           | NC              | NC              | NC               | NC              | NC              | 3 µH   | 0.5 mH |
| VHK150W-Q24-S24 | 220 µF/50 V     | 220 µF/50 V     | 1000 pF          | 1000 pF         | 470 pF          | 680 pF           | 470 pF          | 330 pF          | 3 µH   | 0.5 mH |
| VHK150W-Q24-S28 | 220 µF/50 V     | 220 µF/50 V     | 2200 pF x2       | 1000 pF         | 470 pF          | 2200 pF x2       | 470 pF          | 470 pF          | 3.4 µH | 0.6 mH |
| VHK150W-Q24-S48 | 220 µF/50 V     | 220 µF/50 V     | 2200 pF x4       | 1000 pF         | 1000 pF         | 2200 pF x4       | NC              | NC              | 3.4 µH | 0.6 mH |
| VHK150W-Q48-S5  | 120 µF/100 V    | 120 µF/100 V    | NC               | 680 pF          | NC              | NC               | NC              | NC              | 3 µH   | 0.5 mH |
| VHK150W-Q48-S12 | 120 µF/100 V    | 120 µF/100 V    | NC               | 680 pF          | NC              | NC               | NC              | NC              | 3 µH   | 0.5 mH |
| VHK150W-Q48-S15 | 120 µF/100 V    | 120 µF/100 V    | 1000 pF          | 1000 pF         | 470 pF          | 1000 pF          | 330 pF          | 680 pF          | 3 µH   | 0.5 mH |
| VHK150W-Q48-S24 | 120 µF/100 V    | 120 µF/100 V    | 1000 pF          | 1000 pF         | 470 pF          | 1000 pF          | 330 pF          | 680 pF          | 3 µH   | 0.5 mH |
| VHK150W-Q48-S28 | 120 µF/100 V    | 120 µF/100 V    | 1000 pF          | 1000 pF         | 470 pF          | 1000 pF          | 470 pF          | 470 pF          | 3.4 µH | 0.6 mH |
| VHK150W-Q48-S48 | 82 µF/100 V     | 120 µF/100 V    | 2200 pF + 470 pF | 1500 pF         | 1000 pF         | 2200 pF + 470 pF | NC              | NC              | SHORT  | 0.5 mH |


Notes: 1. Aluminum capacitor  
2. Ceramic capacitor

APPLICATION NOTES


1. **Output Voltage Trimming**  
Leave open if not used.

Figure 4

Trim up

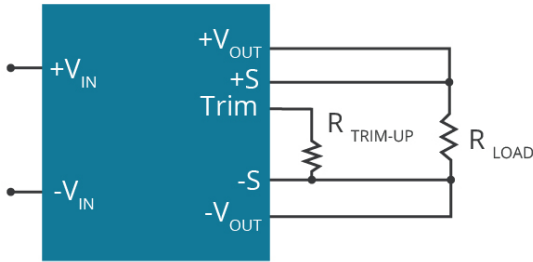

Trim down

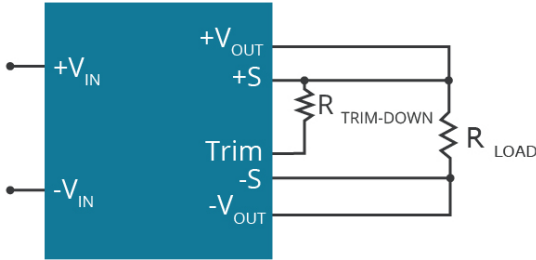

$$R_{\text{TRIM}} = \left( \frac{R_{\text{TOP}} (V_{\text{REF}} - V_F \left( \frac{R_{\text{BOTTOM}}}{R_{\text{BOTTOM}} + R_O} \right))}{V_{\text{OUT}} - V_{\text{OUT, NOM}}} \right) - \frac{R_{\text{BOTTOM}} R_O}{R_{\text{BOTTOM}} + R_O} \quad (\text{K } \Omega)$$

Formula for Trim up

$$R_{\text{TRIM}} = \frac{R_{\text{TOP}} (V_{\text{OUT}} - V_{\text{REF}})}{V_{\text{OUT, NOM}} - V_{\text{OUT}}} - R_{\text{BOTTOM}} \quad (\text{K } \Omega)$$

Formula for Trim down

Table 4

| V <sub>NOM</sub> | R <sub>TOP</sub> | R <sub>BOTTOM</sub> | R <sub>O</sub> | V <sub>REF</sub> | V <sub>F</sub> |
|------------------|------------------|---------------------|----------------|------------------|----------------|
| (Vdc)            | (kΩ)             | (kΩ)                | (kΩ)           | (V)              | (V)            |
| 5                | 2.32             | 3.3                 | 0              | 2.5              | 0              |
| 12               | 9.1              | 51                  | 5.1            | 2.5              | 0.46           |
| 15               | 12               | 56                  | 8.25           | 2.5              | 0.46           |
| 24               | 20               | 100                 | 7.5            | 2.5              | 0.46           |
| 28               | 23.7             | 150                 | 6.2            | 2.6              | 0.64           |
| 48               | 36               | 270                 | 5.1            | 2.5              | 0.46           |

Note: Value for R<sub>TOP</sub>, R<sub>BOTTOM</sub>, R<sub>O</sub>, V<sub>REF</sub>, and V<sub>F</sub> refer to Table 4 (fixed internal values).  
R<sub>TRIM</sub>: Trim resistance  
a: User-defined parameter, no actual meanings  
V<sub>NOM</sub>: Nominal output voltage  
V<sub>OUT</sub>: Target output voltage

Note: 1. All specifications are measured at Ta=25°C, nominal input voltage and full output load unless otherwise specified.

REVISION HISTORY

| rev. | description                                 | date       |
|------|---------------------------------------------|------------|
| 1.0  | initial release                             | 12/17/2013 |
| 1.01 | changed DIN-rail mount                      | 06/16/2014 |
| 1.02 | updated spec                                | 01/05/2015 |
| 1.03 | updated derating curves                     | 06/18/2015 |
| 1.04 | company logo updated                        | 02/08/2021 |
| 1.05 | derating curve and circuit drawings updated | 09/07/2021 |
| 1.06 | output voltage trimming updated             | 05/29/2023 |
| 1.07 | company address updated                     | 11/14/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
15575 SW Sequoia Pkwy #100  
Portland, OR 97224  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.