



SUOST Series

High Frequency Universal Line SMD Transformers

Signals' SUOST series of High Frequency Transformers are designed for Universal Input Off Line Switch Mode Power Supplies, operating with multiple integrated control circuits and various types of switching elements.

These printed circuit mount parts are reinforced insulated, IEC compliant and available in horizontal surface mount technology styles.

Built around an EE16/8/5 geometric size platform, the SUOST units deliver typical industry standard low voltage outputs, at power levels of 12 W, 13 W, 15 W and 16 W.



General Features

- Horizontal SMD mounting platform: EE16/8/5
- High efficiency designs
- Reinforced insulation
- Min. creepage & clearance 6.5 mm
- Moisture sensitivity level MSL 1
- IEC 61558-2-16 compliance

Specifications

- Input Voltage: 85 – 265 VAC (125 – 375 VDC)
- Switching Frequency: 60 – 150 kHz
- Operating Temperature: -40°C to +125°C
- Storage Temperature: -20°C to +60°C (<40°C, 75% RH in pack)
- Ambient Temperature: -40°C to +85°C
- Dielectric Strength: 4 kV AC

Applications

- LED lighting
- PCs / Notebooks
- AC-DC converters
- SMPS

Markets

- Lighting
- Consumer
- Industrial
- Telecom
- Security

PRODUCT IDENTIFICATION

SUOST - 13 - 1205

Type / Product Series

SUOST = High Frequency Universal Line SMD Transformers

Output Power


13 = 13 W

Output Voltage

1205 = 12 V (Vo1), 5 V (Vo2)

MECHANICAL SPECIFICATIONS


Dimensions are in mm.

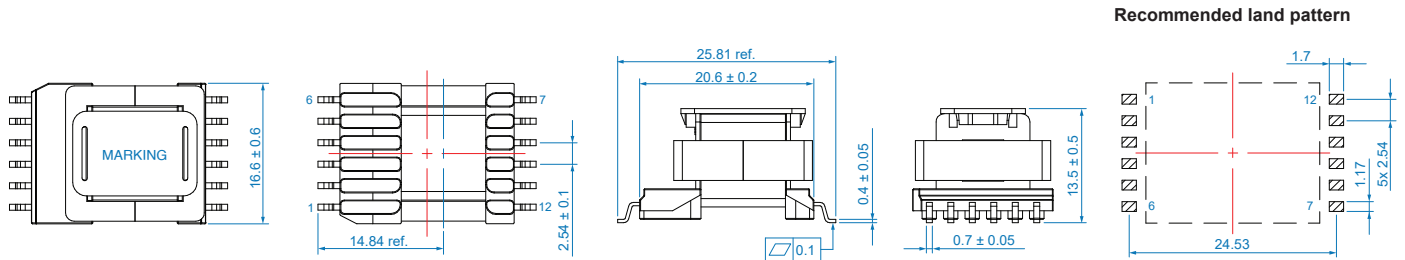


* MARKING: e.g. SUOST-XX-XXXX
DATE CODE

SCHEMATICS

SUOST-12-0505 / SUOST-13-1212 / SUOST-13-2424 /
SUOST-15-0505 / SUOST-16-1212

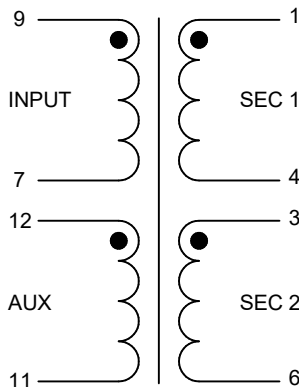

SUOST-12-2405 / SUOST-13-1205 / SUOST-15-1205

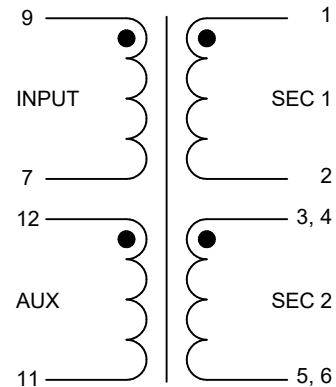

Custom versions available upon request.



128 Atlantic Avenue, Lynbrook, NY 11563
Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal

ELECTRICAL SPECIFICATIONS

Part Number	Input L ² ± 10% (mH)	Input LL ² (Max) (μH)	Input I _{SAT} ³ (Typ) (A)	Input DCR (Max) (Ω)	Turns Ratio I:Vo1:Vo2:Aux (± 3%)	Aux DCR / Voltage (Max) (Ω) / (V)	Vo1/Vo2 DCR (Max) (Ω)	Vo1/Vo2 Current (A)	Vo1/Vo2 Voltage (V)	Output Power Total (W)
SUOST-12-0505	1.31	40	0.80	3.00	140:6:6:16	0.450/14	0.025/0.025	1.25/1.25	5/5	12
SUOST-13-1212	1.25	53	0.80	2.92	136:13:13:15	0.400/14	0.092/0.092	0.55/0.55	12/12	13
SUOST-12-2405	1.31	35	0.80	3.00	140:22:6:16	0.400/14	0.450/0.025	0.30/1.15	24/5	12
SUOST-13-1205	1.25	35	0.80	3.00	140:9:7:18	0.400/14	0.190/0.030	0.55/1.25	12/5	13
SUOST-13-2424	1.25	40	0.80	3.00	140:27:27:16	0.450/14	0.620/0.620	0.28/0.28	24/24	13
SUOST-15-0505	1.50	50	0.80	4.20	160:7:7:18	0.400/14	0.034/0.034	1.50/1.50	5/5	15
SUOST-16-1212 ⁴	1.50	60	0.80	4.20	160:14:14:16	0.450/14	0.140/0.140	0.65/0.65	12/12	16
SUOST-15-1205 ⁴	1.50	60	0.80	6.50	160:10:7:16	0.370/14	0.086/0.024	0.7/1.36	12/5	15

¹ Electrical specifications at 20°C and 33% relative humidity

² “L” & “LL” test conditions: 100 kHz, 100 mV, 0 ADC

³ “I_{SAT}” is the saturation current at which “L” drops by 10%


⁴ Input voltage for SUOST-15-1205 & SUOST-16-1212 = 195 – 265 VAC

Custom versions available upon request.




128 Atlantic Avenue, Lynbrook, NY 11563
 Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208
 sales@signaltransformer.com | techhelp@signaltransformer.com

belfuse.com/signal

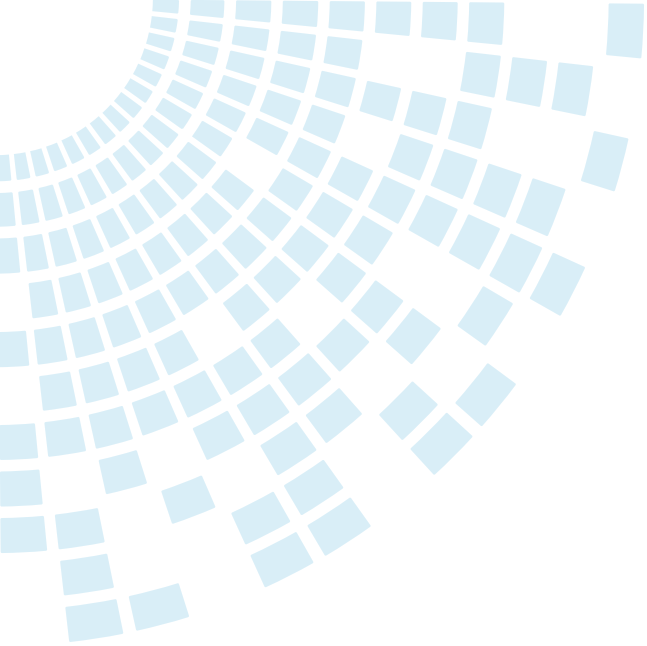

About Signal Transformer

Signal Transformer is known as the world's leader of wire wound magnetic solutions since 1959. With over 50 years of experience manufacturing transformers, chokes, inductors and custom or modified standard products. Signal offers not only the most comprehensive line of certified standard power conversion products, with our vast engineering, manufacturing and regulatory resources; Signal Transformer excels in the design and manufacturer of cost effective, specialized platforms.

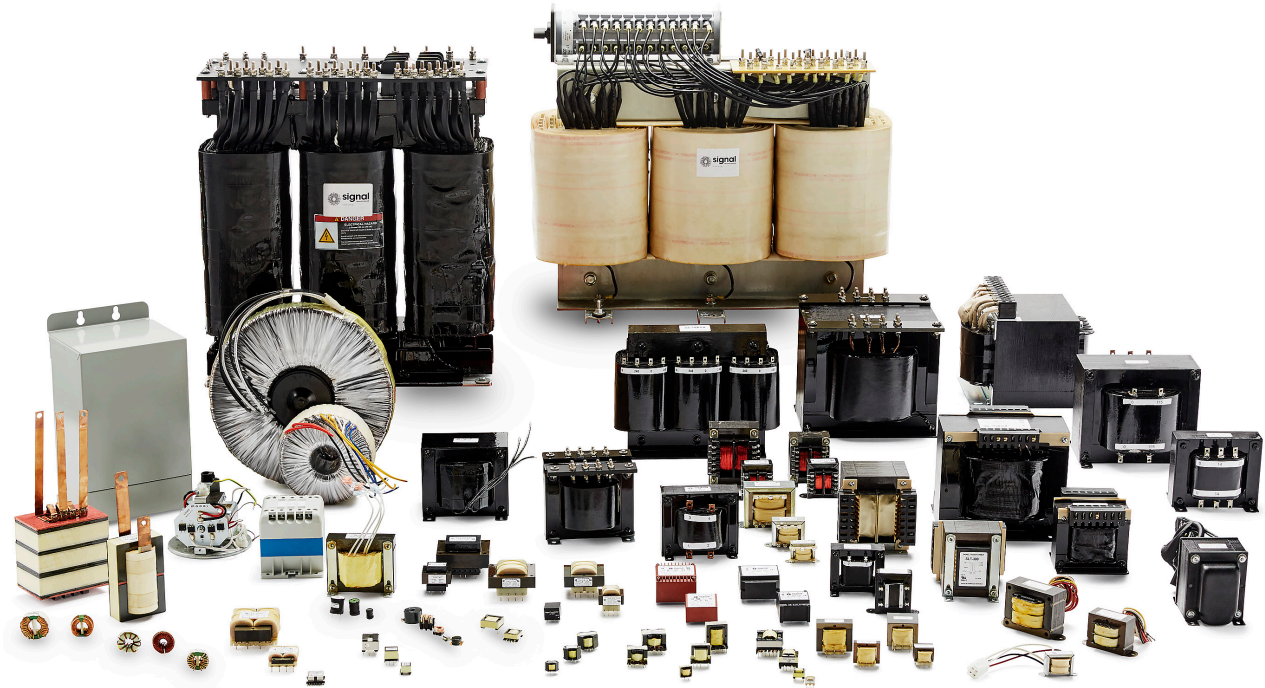

**For more information,
please contact us:**

128 Atlantic Avenue
Lynbrook, NY 11563

Toll Free +1 866-239-5777

Tel +1 516-239-5777

Fax +1 516-239-7208

sales@signaltransformer.com
techhelp@signaltransformer.com

[belfuse.com/signal](https://www.belfuse.com/signal)

