

Proprietary Information of:  bel POWER SOLUTIONS & PROTECTION <small>a bel group</small>	Title: EN 50155 Declaration of Conformity	Document No. URR.04381	Rev. AE
--	---	----------------------------------	-------------------

Declaration of Conformity

We, Bel Fuse Inc., hereby declare under our sole responsibility that the products herein after referred to are in compliance with the **EN 50155:2021**.


Manufacturer/Address: **Bel Fuse Inc.**
300 Executive Drive, Suite 300
West Orange, NJ 07052
USA

Product: **DC-DC Converter**

Type Designation: **RCM300 Series**
 (Refer to Table 1 listing affected part numbers)

Standard(s): **EN 50155:2021**
EN 50124-1:2017
EN 50125-1:2014
EN 50121-3-2:2016/A1:2019
EN 60529:1991/A2:2013/AC:2019-02
EN 61373:2010/AC:2017-09
EN 45545-2:2020+A1:2023
 (Refer to Table 2 listing achieved compliance)

Prepared by:

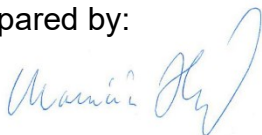

Dubnica nad Váhom, Slovakia

Feb 24th, 2024

Marian Hostačný,
Engineering Manager

Place

Date

Approved by:



Uster, Switzerland

Feb 24th, 2024

Silvan Mueller,
Business Development
Manager

Place

Date


Table 1: List of affected product part numbers

No.	P/N	No.	P/N
1	24RCM300-12	10	110RCM300-12
2	24RCM300-12DMQ	11	110RCM300-12K
3	24RCM300-12DMQF	12	110RCM300-12D
4	24RCM300-24	13	110RCM300-12DF
5	24RCM300-24D	14	110RCM300-12DMQ
6	24RCM300-24DMQ	15	110RCM300-12DMQF
7	24RCM300-24DMQK	16	110RCM300-12DMQFK
8	24RCM300-24DMQF	17	110RCM300-24
9	24RCM300-24DMQFK	18	110RCM300-24K
		19	110RCM300-24D
		20	110RCM300-24DK
		21	110RCM300-24DF
		22	110RCM300-24DMQ
		23	110RCM300-24DMQF
		24	110RCM300-24DMQFK

Note: model names may be followed by suffix indicating non-critical options.

Part Number Description

Operating input voltage $V_{I\text{cont}}$ (continuously):	
16.8 – 45 VDC	24
50.4 – 137.5 VDC	110
Series	RCM
Output power:	
150 W	150
300 W	300
Nominal output voltage:	
12 V	-12
15 V	-15
24 V	-24
Auxiliary functions and options:	
Out OK, output voltage adjust, shutdown ¹	D
Interruption time	M
ORing FET.....	Q
Fuse built-in	F
Pluggable Connectors	K

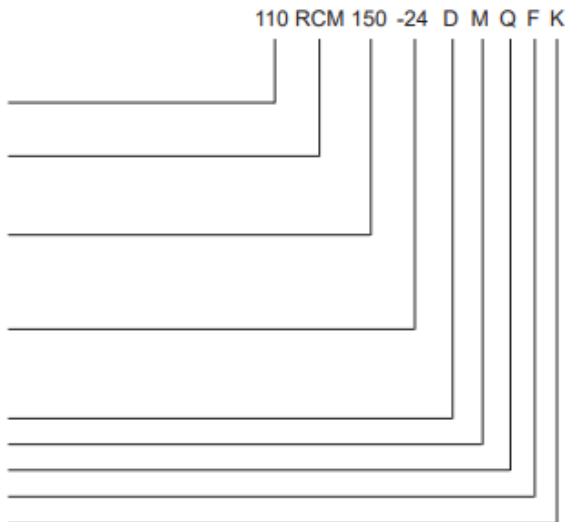

¹ Opt. D requires the auxiliary connector.

Note: The sequence of options must follow the order above.

Note: All models are RoHS-compliant for all six substances.

Available combinations of options:
 24/110RCMxxx-xx (K)
 24/110RCMxxx-xxD (K)
 24/110RCMxxx-xxDF (K)
 24/110RCMxxx-xxDMQ (K)
 24/110RCMxxx-xxDMQF (K)

 bel POWER SOLUTIONS & PROTECTION <small>a bel group</small>	<i>Title:</i>	<i>Document No.</i>	<i>Rev.</i>
	EN 50155 Declaration of Conformity	URR.04381	AE

Table 2: Compliance status

Subclause	Title	Default requirement	Product compliance
4.4.1	Altitude	Class A1 (1400 meters) Table 1 of EN 50125-1	Fulfilled (AX - 3000 meters)
4.4.2	Operating temperature	Table1: Class OT3 (-25 to +71 degC)	Fulfilled (OT4)
4.4.3	Switch-on extended op. temp.	Table2: Class ST1 (Test cycle B)	Fulfilled (ST1)
4.4.4	Rapid temperature variation	Table3: Class H1 (No requirements)	Fulfilled (H1)
4.4.5	Shock and Vibration	Category 1; Class B of EN 61373:2010	Fulfilled
4.4.6	Electromagnetic compatibility	In compliance with EN 50121-3-2:2016	Fulfilled
4.4.7	Relative humidity	In compliance with EN 50125-1:2014	Fulfilled
4.5.2	Atmospheric pollutants	No requirements apply by default	Fulfilled (Salt Mist per EN 50155:2021, clause 13.4.13)
5.2.2	The nominal voltage of equipment (Un)	Either of following values: 24 V, 28 V, 36 V, 48 V, 72 V, 96 V, 110 V	Fulfilled (24V, 36V, 48V, 72V, 96, 110V)
5.2.2	Continuous DC power supply range	Table4: 0.7 x Un – 1.25 x Un	Fulfilled (16.8V – 45V for 24RCM300) (50.4V – 137.5V for 110RCM300)
5.2.3	Temporary DC power supply fluctuation	Table4: 0.6 x Un – 1.4 x Un (for 100msec)	Fulfilled (14.4V – 52.5V for 24RCM300) (43.2V – 154V for 110RCM300)
5.2.4	Interruption of voltage supply	Class S2 (10 msec)	Fulfilled (S2 – 10msec)
5.2.5	Supply Change-Over	Table6: Class C1	Fulfilled (C1)
5.2.7	DC ripple factor	Ripple factor of +/- 5%	Fulfilled (±5%)
6.2	Useful life	Class L4	Fulfilled (L4)
6.3.2	Preventive maintenance	No periodic maintenance applies	Fulfilled (No maintenance required)
7.2.1	Insulation Coordination	Pollution degree PD2 of EN 50124-1	Fulfilled (PD2)
		Table 13 (13.4.7): Insulation & withstand test voltages shall be applied	Fulfilled
10.2.1	Electronic assembly acceptability	Class 2 according to IPC-A-610	Fulfilled (Class 2)
10.2.5	IC Sockets and Edge connectors	Class K2 (not allowed)	Fulfilled (K2)
10.7	Protective coatings for PCB's	Class PC2	Fulfilled (PC2)
10.9	Mounting	Enclosure shall provide the necessary protection (IP code acc to	Fulfilled (IP30)
10.10	Cooling and ventilation	Forced ventilation for cooling is not allowed	Fulfilled (No forced cooling)
11.4	Fire behavior requirements	Fire behavior testing shall be according to EN 45545-2:2020.	Fulfilled (Hazard level 3)
12.7.8.3	Programmable component	Table10: Class M0	Not Applicable