

PART NUMBER	ITEM ①	ITEM ②	ITEM ③
	BODY	CONTACT	INSULATOR
142-0731-211	BRASS GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER	TEFLON

REV	ECO	DATE
1	INITIAL RELEASE	13JUL2023
2	EC-2311007	20N0V2023

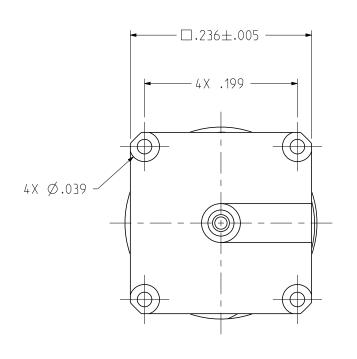

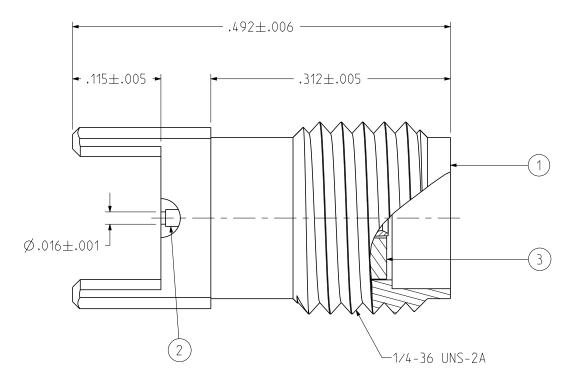


NOTES:


- 1. ELECTRICAL SPECIFICATIONS:
- 1.1 IMPEDANCE: 50 OHMS 1.2 FREQUENCY RANGE: 0-26.5 GHz
- 1.3 VSWR: 1.25 MAX
- 1.4 WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
- 1.6 INSULATION RESISTANCE: 5000 MEGOHM MIN 1.7 CONTACT RESISTANCE:
- 1.7.1 CENTER CONTACT INTIAL 3.0 MILLIOHM MAX, AFTER
- ENVIRONMENTAL 4.0 MILLIOHM MAX 1.7.2 OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX, AFTER
 - ENVIRONMENTAL NOT APPLICABLE
- 2. MECHANICAL SPECIFICATIONS:
- 2.1 ENGAGE/DISENGAGE TORQUE: 2 IN LBS MAX
- 2.2 MATING TORQUE: 7-10 IN LBS
- 2.3 DURABILITY: 500 CYCLES MIN
- 3. ENVIRONMENTAL:


(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012)

- 3.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B 3.2 OPERATING TEMPERATURE: -65 °C TO 165 °C
- 3.3 CORROSION: MIL-STD-202, METHOD 101, CONDITION B

- 3.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I 3.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D 3.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

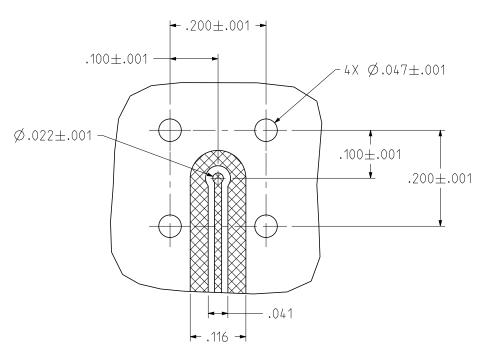





CINCH	Model No: 142-0731-211/220		JOHNSON
This PROPRIETARY Document is properly of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, understanding that it is not traced or copied without permission and is returnable upon demand. INTER	(EU)/2015/863 COMPLIANT UNLESS OTHERWISE SPECIFIED UNITS: INCH	Cage Code 3RD ANGLE PROJECTION	Title: SMA JACK, VERTICAL, PCB SURFACE MOUNT
		Drawn by: Roman.Yao	Drawing No. 142-0731-211/220 REV. 2
		Date: 07/13/2023	B DO NOT SCALE Workmanship Std: Sheet 1 OF 1