

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: 0.5 to 18.0 GHz
- 1.2 IMPEDANCE: 50 OHMS, NOM.
- 1.3 VSWR: 1.35:1 MAX.
- 1.4 INSERTION LOSS: 0.5dB MAX.
- 1.5 DC WORKING VOLTAGE: 200 VOLTS, MIN.
- 1.6 OPERATING TEMPERATURE: -20°C to +100°C
- 1.7 TYPE: INNER/OUTER

2.0 MARKING:

MARK UNIT AS SHOWN.

3. BLACK EPOXY SEAL

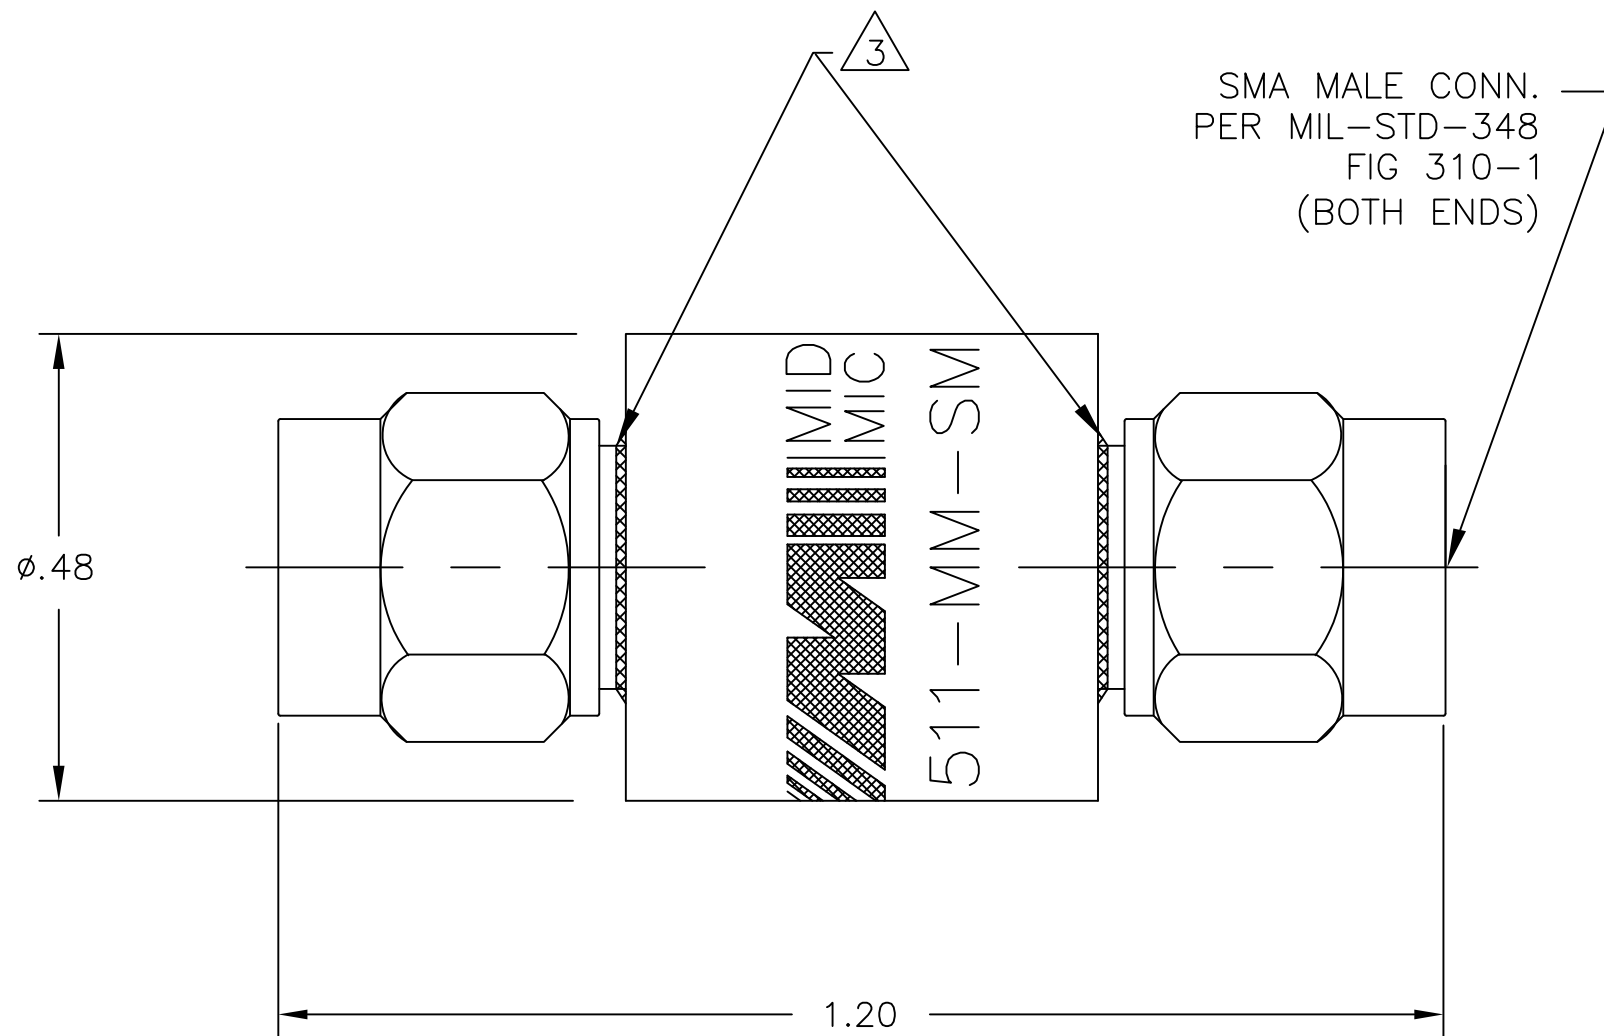

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
 3 PLACE DECIMALS ±.005
 2 PLACE DECIMALS ±.02
 FRACTIONS ±1/64
 PARALLELITY: T.I.R. _____
 FLATNESS: T.I.R. _____
 CONCENTRICITY: T.I.R. _____
 ANGLES AND PERPENDICULARITY: ±1'

CAGE CODE 34078		MIDWEST MICROWAVE	
 EMERSON Network Power Connectivity Solutions		TITLE DC BLOCK OUTLINE DRAWING	
		DRAWN/DATE M.HOLLMAN 9/1/92	ENG./DATE G.KOZAK 9/3/92
CHECKED/DATE A.BEATTY 9/2/92		APPROVED/DATE	DRAWING NUMBER DCB-3511-MM-SMA-02-01
SCALE: 5=1		SHEET 1 of 1	REV. E

REV.	DESCRIPTION	DATE
-	RELEASED	9/4/92
-1	ADDED TITLEBLOCK	5/26/05
D	ECO 22168	5/5/10
E	ECO 23429	3/29/11