



DATE	REV	ECN	APP'D. BY
11/5/20	A0	Released	AB

### ISOMETRIC VIEW

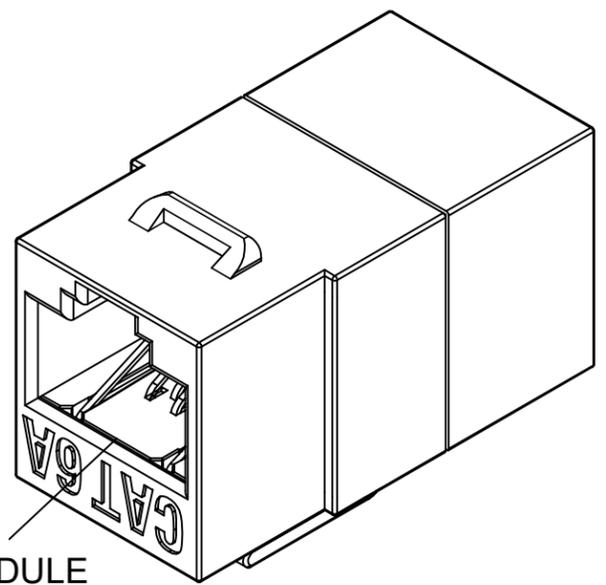

### JACK HOUSING LEFT

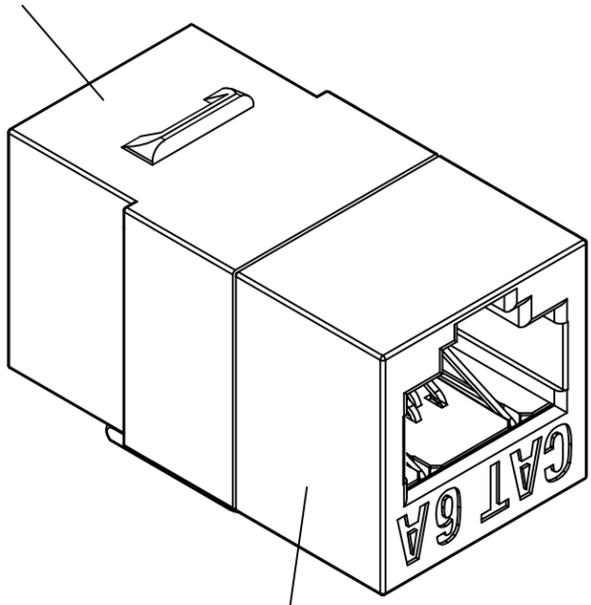

### JACK HOUSING RIGHT

**TRANSMISSION PERFORMANCE**  
 Meet all requirement specified in channel requirement of:  
 ISO/IEC 11801 , Class E<sub>A</sub>  
 ANSI/TIA-568-C.2, Category 6A





**ELECTRICAL**  
 Electrical Insulation Resistance : 500 MΩ min. @ 100V d.c  
 Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute

**MECHANICAL**  
 Insertion / Extraction Life : 750 Cycles Minimum

**PHYSICAL**  
 Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0  
 Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold

INSERT MODULE


### ASSEMBLY DIMENSION

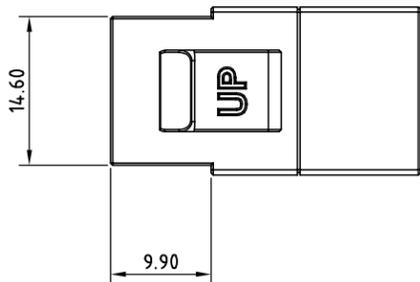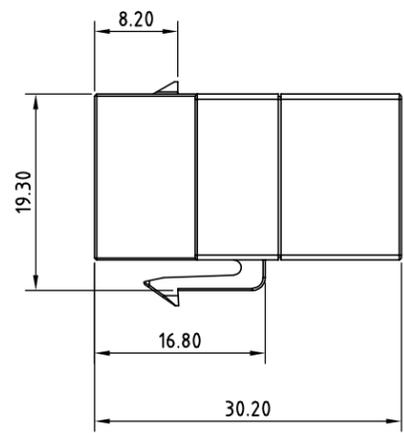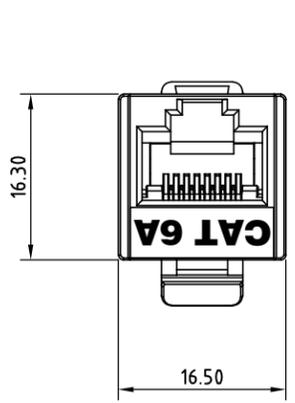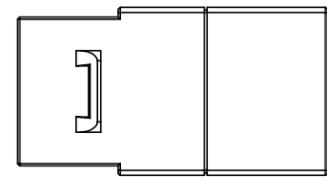

COMPONENTS		
ITEM	PART NAME	Q'TY
3	INSERT MODULE	2
2	JACK HOUSING LEFT	1
1	JACK HOUSING RIGHT	1

SS-82020-001  
 PART NUMBER

THIRD ANGLE PROJECTION



206 Van Vorst Street  
 Jersey City, NJ 07302  
 +1 201 432 0463  
<http://www.belfuse.com>

DO NOT SCALE DRAWING  
 DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS: METRIC  
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±0.2 ANGLS ARE ± 1°  
 SHEET NO. 1 OF 1

TITLE: **CAT 6A UNSHIELDED KEYSTONE COUPLER JACK**  
 THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

DRN BY: JE	DATE 10/28/20
APPD BY: AB	DATE 11/5/20
DWG NO. CT820037	REV. A0

