



DATE	REV	ECN	APP'D. BY
10-29-21	A0	11878	ADB
2-7-22	A1	11929	JME

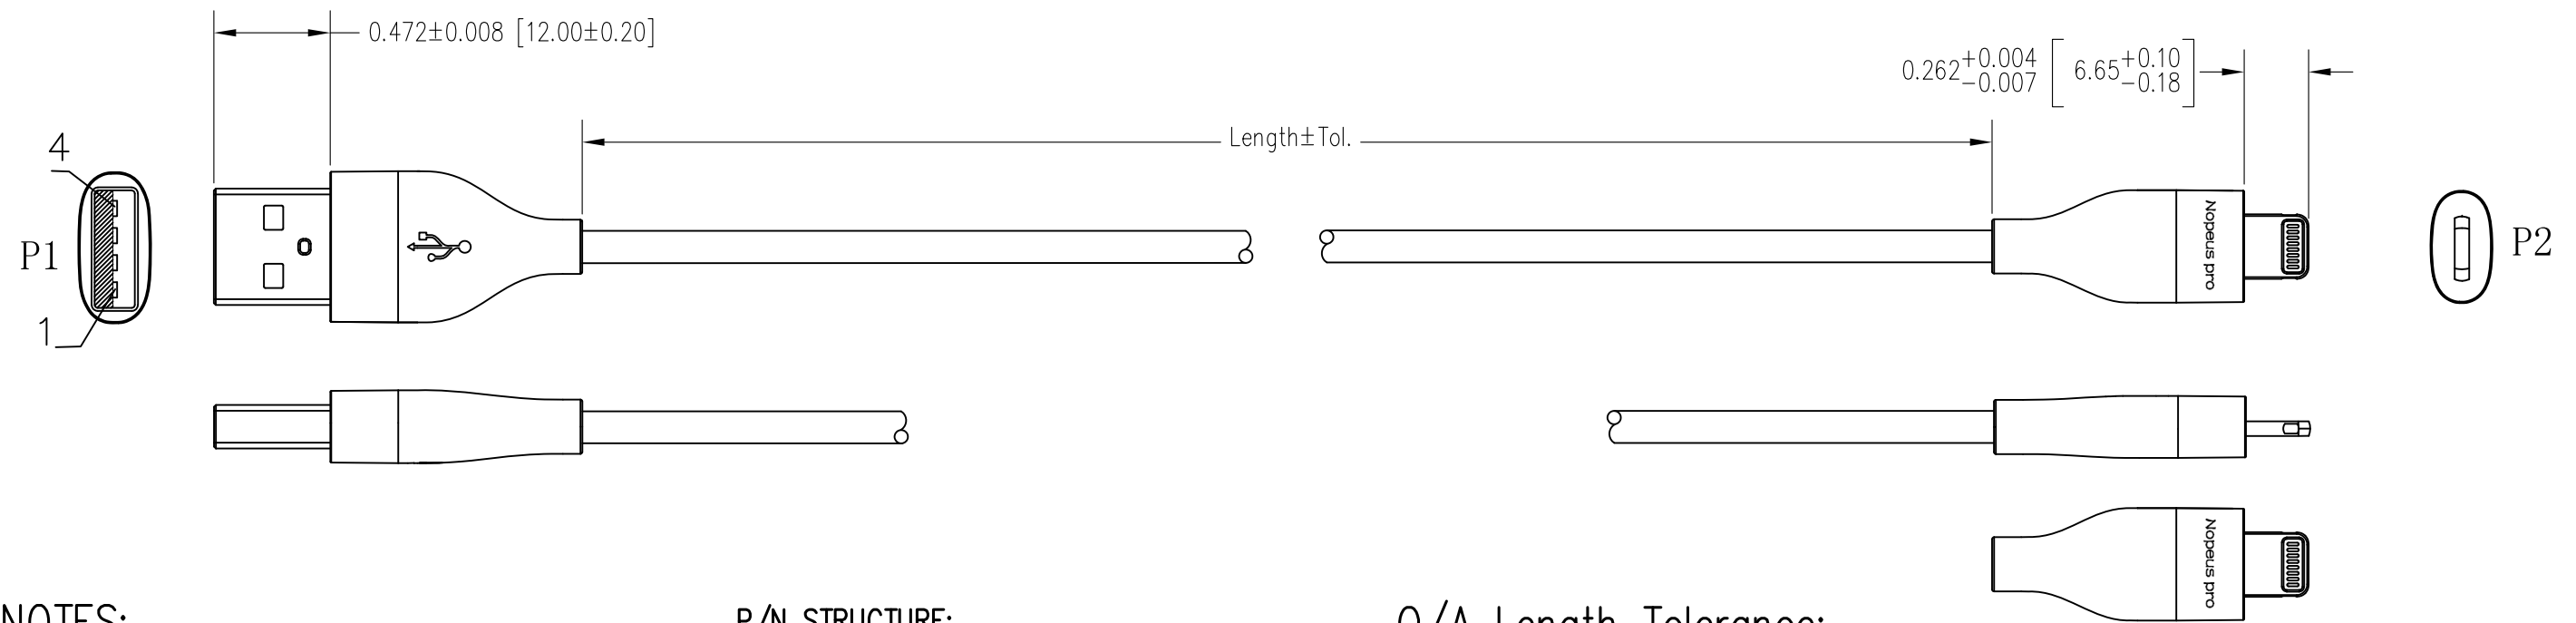

NOTES:

- 1) MFi CERTIFIED
- 2) EACH CABLE ASSEMBLY TO BE INDIVIDUALLY BAGGED.
- 3) CABLE CONSTRUCTION PVC
 - 3.7MM OD
 - BLACK JACKET
- 4) CONNECTOR P1: USB A MALE 2.0 WHITE INSULATOR,
 - NICKEL PLATED TIN SHELL
 - BLACK PVC EXTERIOR MOLDING
- 5) CONNECTOR P2: i5 C89
 - NICKEL PLATED TIN SHELL
 - BLACK PVC EXTERIOR MOLDING
- 6) ALL CABLES TESTED FOR CONTINUITY & SHORTS
 - CONTACT RESISTANCE 3 OHM MAX.
 - INSULATION RESISTANCE 10M OHM

P/N STRUCTURE:

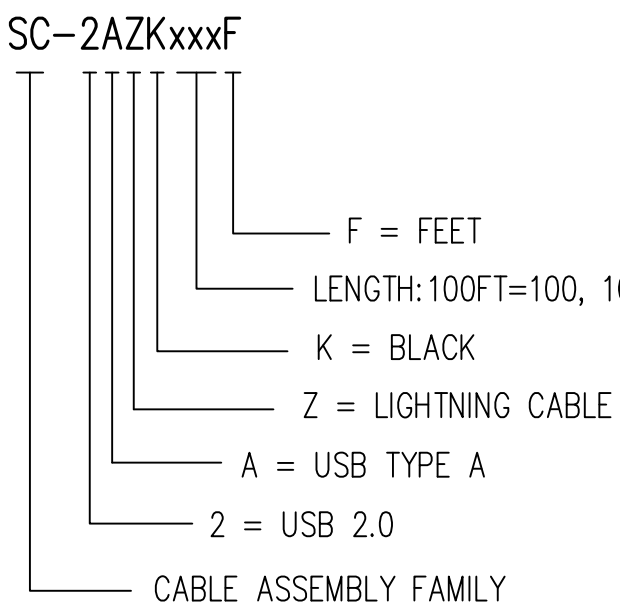

O/A Length Tolerance:

Metric
 915mm ±20mm
 1830mm ±30mm

Imperial
 3ft ±0.5in
 6ft ±0.75in

Pin Assignment			
USB AM		C89	
1	Red	1	VBUS
2	White	2	D-
3	Green	3	D+
4	Drain	5	GND1
SHELL	Braid		SHELL

LENGTH	PART NUMBER
3 FT	SC-2AZK003F
6 FT	SC-2AZK006F



THIRD ANGLE PROJECTION 		206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 http://www.belfuse.com
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	TITLE: USB 2.0 to i5 C89 Lightning Cable Black	
DIMENSIONS: METRIC UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±0.13 ANGLER ARE ± 1°	DRN BY: JMM DATE: 10-27-21	APPD BY: ADB DATE: 10-29-21
SHEET NO. 1 OF 1	DWG NO. CT999271 REV. A1	