


B

A






B

A

| DATE | REV | ECN | APP'D. BY |
|----------|-----|-------|-----------|
| 2-29-16 | B3 | 10573 | TRM |
| 11-10-16 | B4 | 10820 | TRM |
| 1-13-17 | B5 | 10863 | TRM |
| | | | |



PIN POSITION LAYOUT IS IDENTICAL TO STANDARD JACKS

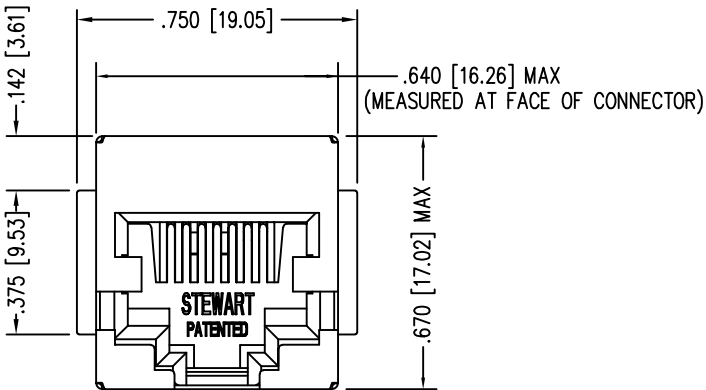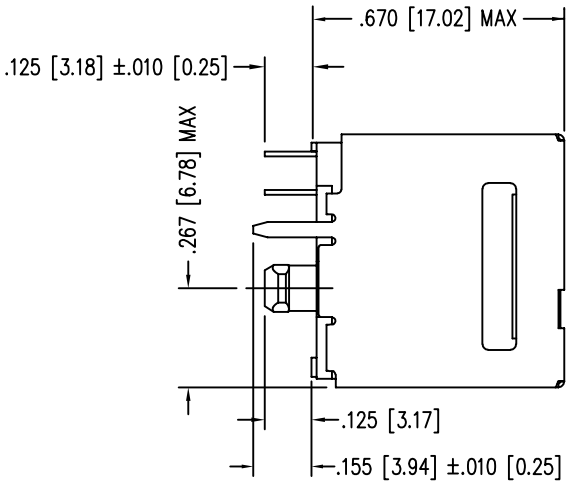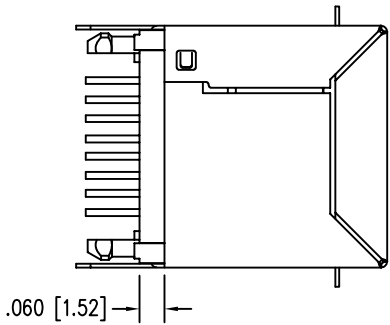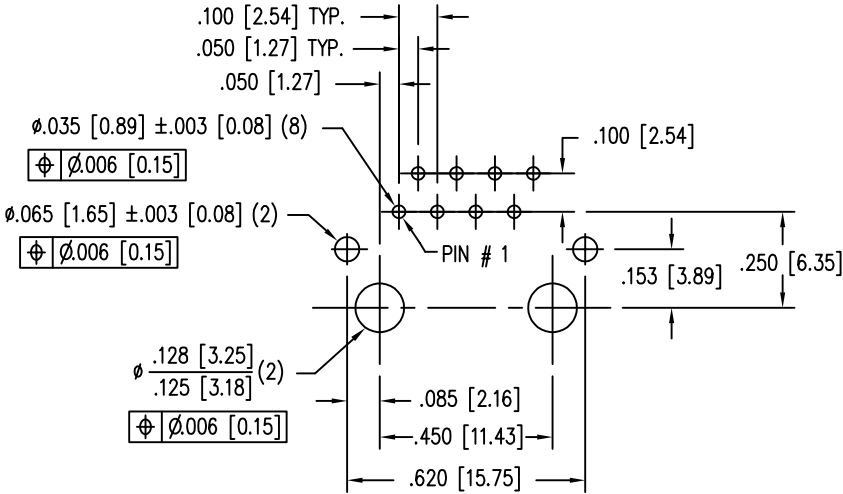

- NOTES:
- CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACTS/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL OR TIN
CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA
SEE CHART FOR PART NUMBER
 - FOR PRODUCT SPECIFICATIONS SEE PR026-01.
 - RATED AT MAX. 260°C FOR MAX. 10 SECS.
 - DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
 - DESIGNED FOR CATEGORY 5/5e APPLICATIONS.

| | |
|--------------------------------|--------------|
| 30 MICRO-INCHES [0.76um] | SS71800-026F |
| CONTACT PLATING IN MATING AREA | PART NUMBER |



| | | |
|--|--|--|
| THIRD ANGLE PROJECTION |  | 11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512 http://www.stewartconnector.com |
| DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE | TITLE: EIGHT CONTACT, EIGHT POSITION; VERTICAL MOUNT SHIELDED JACK CAT 5/5e JACK, "-FLS" FLANGE | |
| DIMENSIONS: INCHES [METRIC] | THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE VISIT: HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/ | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1° | DRN BY: TRM | DATE: 12-22-05 |
| SHEET NO. 1 OF 1 | APPD BY: DHG | DATE: 12-22-05 |
| | DWG NO. CT710029F | REV. B5 |