

## SERIES: PYB15-T & PYB15-U | DESCRIPTION: DC-DC CONVERTER

#### **FEATURES**

- up to 15 W isolated output
- industry standard pinout
- 4:1 input range (9~36 Vdc, 18~75 Vdc)
- smaller package
- single/dual regulated outputs
- 1,500 Vdc isolation
- continuous short circuit, over current protection, over voltage protection
- reverse polarity protection on chassis mount (-T) models
- temperature range (-40~85°C)
- six-sided metal shielding
- efficiency up to 90%
- EN 60950



MODEL		nput oltage	output		itput rrent	output power	ripple and noise <sup>1</sup>	efficiency <sup>2</sup>
	typ (Vdc)	range (Vdc)	voltage (Vdc)	min (mA)	max (mA)	max (W)	max (mVp-p)	<b>typ</b> (%)
PYB15-Q24-S3 <sup>3,4,5</sup>	24	9~36	3.3	200	4000	13.2	100	87
PYB15-Q24-S5 <sup>3,5</sup>	24	9~36	5	150	3000	15	100	90
PYB15-Q24-S123,4,5	24	9~36	12	63	1250	15	100	89
PYB15-Q24-S15 <sup>3,4,5</sup>	24	9~36	15	50	1000	15	100	89
PYB15-Q24-S24 <sup>3,4,5</sup>	24	9~36	24	31	625	15	100	90
PYB15-Q24-D5 <sup>3,4,5</sup>	24	9~36	±5	±75	±1500	15	100	86
PYB15-Q24-D123,4,5	24	9~36	±12	±32	±625	15	100	88
PYB15-Q24-D15 <sup>3,5</sup>	24	9~36	±15	±25	±500	15	100	88
PYB15-Q48-S34,5	48	18~75	3.3	200	4000	13.2	100	87
PYB15-Q48-S5⁴	48	18~75	5	150	3000	15	100	89
PYB15-Q48-S12⁵	48	18~75	12	63	1250	15	100	88
PYB15-Q48-S154,5	48	18~75	15	50	1000	15	100	90
PYB15-Q48-D54,5	48	18~75	±5	±75	±1500	15	100	86
PYB15-Q48-D124,5	48	18~75	±12	±32	±625	15	100	88
PYB15-Q48-D154,5	48	18~75	±15	±25	±500	15	100	89

1. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 µF ceramic and 10 µF electrolytic capacitors on the output. Notes:


Output

S = single

D = dual

Ripple and noise are measured at 20 MHz BW by parallel cable me
Efficiency is approximately 2% lower for chassis mount (-T) models.
Model is not CE certified.
Discontinued model - U-frame
Discontinued model - Chassis mount.

PART NUMBER KEY



Input Voltage



**Output Voltage** 

Mounting Type T = Chassis mount  $U = U - frame^3$ 

.....

Heatsink\* "blank" = no heatsink H = with heatsink



PYB15 - 0XX - XXX - X - X

### **INPUT**

parameter	conditions/description	min	typ	max	units	
operating input voltage	24 Vdc input models 48 Vdc input models	9 18	24 48	36 75	Vdc Vdc	
start-up voltage	24 Vdc input models 48 Vdc input models			9 17.8	Vdc Vdc	
under voltage shutdown <sup>1</sup>	24 Vdc input models 48 Vdc input models	7.5 16			Vdc Vdc	
surge voltage	for maximum of 1 second 24 Vdc input models 48 Vdc input models	-0.7 -0.7		50 100	Vdc Vdc	
start-up time	nominal input, constant load		10		ms	
filter	pi filter					
	models ON (CTRL open or connect TTL hig	h level, 2.5~12 Vdc)				
CTRL <sup>2</sup>	models OFF (CTRL connect GND or low level, 0~1.2 Vdc)					
	input current (models OFF)		1		mA	

## **OUTPUT**

full load, input voltage from low to high		±0.2		
		±0.2	±0.5	%
5% to 100% load		±0.5	±1	%
dual output models: main output 50% load, secondary output from 10% to 100% load			±5	%
		±1	±3	%
dual output, balanced loads		±0.5	±1	%
		±10		%
PWM mode		300		kHz
25% load step change		300	500	μs
25% load step change		±3	±5	%
100% load			±0.02	%/°C
	main output 50% load, secondary output from 10% to 100% load dual output, balanced loads PWM mode 25% load step change 25% load step change	main output 50% load, secondary output from 10% to 100% load dual output, balanced loads PWM mode 25% load step change 25% load step change	main output 50% load, secondary output from 10% to 100% load±1dual output, balanced loads±0.5±10PWM mode30025% load step change30025% load step change±3	main output 50% load, secondary output from 10% to 100% load $\pm 5$ $10\%$ to 100% load $\pm 1$ $\pm 3$ dual output, balanced loads $\pm 0.5$ $\pm 1$ $\pm 10$ $\pm 10$ $\pm 10$ PWM mode30025% load step change25% load step change $300$ $500$ 25% load step change $\pm 3$ $\pm 5$

3. For dual output models, unbalanced loads should not exceed  $\pm 5\%$ . If  $\pm 5\%$  is exceeded, it may not meet all specifications. 4. Output trimming available on single output models only.

### PROTECTIONS

Note:

.....

parameter	conditions/description	min	typ	max	units
short circuit protection	hiccup, continuous, automatic recovery				
over current protection			160		%
	3.3 Vdc output models		3.9		Vdc
	5 Vdc output models		6.2		Vdc
over voltage protection	12 Vdc output models		15		Vdc
	15 Vdc output models		18		Vdc
	24 Vdc output models		30		Vdc

# SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute at 1 mA max.	1,500			Vdc
isolation resistance	input to output at 500 Vdc	1,000			MΩ

## **SAFETY AND COMPLIANCE (CONTINUED)**

parameter	conditions/description	min	typ	max	units
safety approvals	certified to 60950: EN				
conducted emissions	CISPR22/EN55022, class A, class B (exterr	nal circuit required, see	e Figure 1-b)		
radiated emissions	CISPR22/EN55022, class A, class B (exterr	nal circuit required, see	e Figure 1-b)		
ESD	IEC/EN61000-4-2, class B, contact ± 4kV				
radiated immunity	IEC/EN61000-4-3, class A, 10V/m				
EFT/burst	IEC/EN61000-4-4, class B, ± 2kV (externa	l circuit required, see l	-igure 1-a)		
surge	IEC/EN61000-4-5, class B, ± 2kV (externa	l circuit required, see l	-igure 1-a)		
conducted immunity	IEC/EN61000-4-6, class A, 3 Vr.m.s				
voltage dips & interruptions	IEC/EN61000-4-29, class B, 0%-70%				
MTBF	as per MIL-HDBK-217F @ 25°C	1,000,000			hours
RoHS	2011/65/EU				

## **ENVIRONMENTAL**

parameter	conditions/description	min typ	max	units
operating temperature	see derating curves	-40	85	°C
storage temperature		-55	125	°C
storage humidity	non-condensing	5	95	%
case temperature	at full load, Ta=71°C		105	°C
vibration	10~55 Hz for 30 min. along X, Y and Z axis	10		G

## **MECHANICAL**

parameter	conditions/description	min	typ	max	units
	chassis mount: 76 x 31.5 x 21.2				mm
dimensions	chassis mount with heatsink: $76 \times 31.5 \times 25.10$				mm
	U-Frame: 52.32 x 54.99 x 19.05				mm
	U-Frame with heatsink: $52.32 \times 54.99 \times 22.90$				mm
case material	aluminum alloy				
	chassis mount		50		g
weight	chassis mount with heatsink		58		g
weight	U-Frame		58		g
	U-Frame with heatsink		66		g
C					

.....


## **MECHANICAL DRAWING**

#### **CHASSIS MOUNT**

units: mm[inch] tolerance: ±0.50[±0.02]

wire range: 24~12 AWG

PIN CONNECTIONS					
PIN	Single Output	Dual Output			
1	CTRL	CTRL			
2	GND	GND			
3	Vin	Vin			
4	0V	-Vo			
5	Trim	0V			
6	+Vo	+Vo			

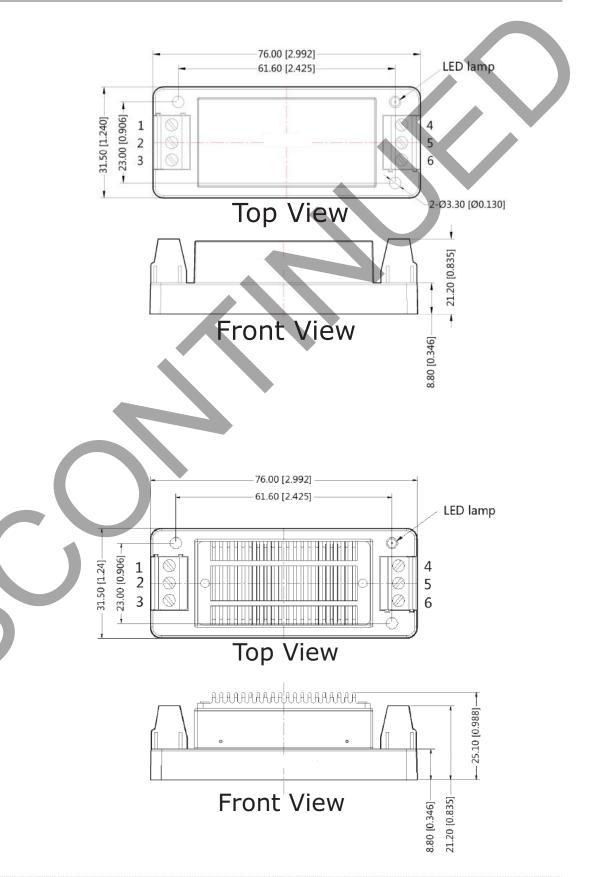

### **CHASSIS MOUNT WITH HEATSINK**

units: mm[inch] tolerance: ±0.50[±0.02]


wire range: 24~12 AWG

PIN CONNECTIONS					
PIN	Single Output	Dual Output			
1	CTRL	CTRL			
2	GND	GND	ſ		
3	Vin	Vin			
4	0V	-Vo			
5	Trim	٥V			
6	+Vo	+Vo			

## **MECHANICAL DRAWING (CONTINUED)**


#### **U-FRAME**

.....

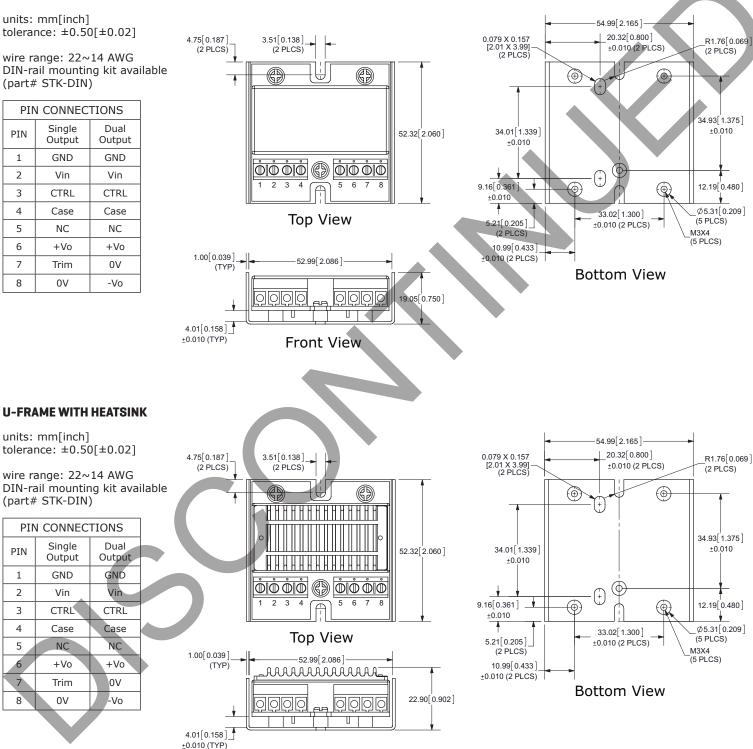

Front View

## **DERATING CURVES**

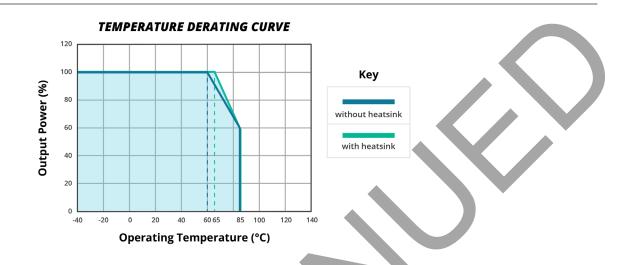

## **EMC RECOMMENDED CIRCUIT**

.....

Figure 1

Table 1


Recommended external circuit components					
	Vin (Vdc)	24	48		
FUSE Choose according to input curr					
	MOV	S14K35	S14K60		
	LDM1	4.7µH	4.7µH		
	C0	330µF/50V	330µF/100V		
	C1	1µF/50V	1µF/100V		
	CY1	1nF/2kV	1nF/2kV		
	CY2	1nF/2kV	1nF/2kV		

Note: 1. See Table 2 for Cout values.

### **APPLICATION NOTES**

#### 1. Recommended circuit

This series has been tested according to the following recommended testing circuit before leaving the factory. This series should be tested under load (see Figure 2). If you want to further decrease the input/output ripple, you can increase the capacitance accordingly or choose capacitors with low ESR (see Table 2). However, the capacitance of the output filter capacitor must be appropriate. If the capacitance is too high, a startup problem might arise. For every channel of the output, to ensure safe and reliable operation, the maximum capacitance must be less than the maximum capacitive load (see Table 3).



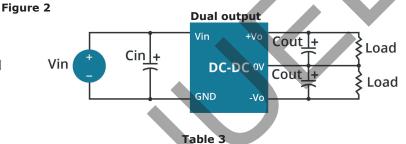


Table 2


Cin (µF)	Cout (µF)	Dual Vout (Vdc)	Cin (µF)	Cout¹ (µF)
100	470			
100	470	±5	100	220
100	220	±12	100	100
100	220	±15	100	100
100	100			
	(µF) 100 100 100 100	(μF)(μF)100470100220100220	(μF)     (μF)     (Vdc)       100     470        100     470     ±5       100     220     ±12       100     220     ±15	(μF)     (Vdc)     (μF)       100     470         100     470     ±5     100       100     220     ±12     100       100     220     ±15     100

Single Vout Max. Capacitive Load Dual Vout Max. Capacitive Load<sup>1</sup> (Vdc) (µF) (Vdc) (µF) 3.3 10200 ----5 4020 5 4800 12 1035 12 800 15 705 15 500 470 24 ----1. For each output. Note:

Note: 1. For each output.

#### 2. Output voltage trimming

Leave open if not used.

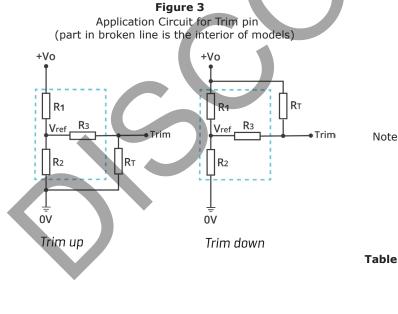

Formula for Trim Resistor

up: 
$$R_T = \frac{aR_2}{R_2 - a} - R_3$$
  $a = \frac{Vref}{Vo' - Vref} \cdot R_1$   
down:  $R_T = \frac{aR_1}{R_1 - a} - R_3$   $a = \frac{Vo' - Vref}{Vref} \cdot R_2$ 

Note: Value for R1, R2, R3, and Vref refer to Table 4  $R_{T}$ : Trim Resistor

a: User-defined parameter, no actual meanings Vo': The trim up/down voltage

	Vout (Vdc)	R1 (kΩ)	R2 (kΩ)	R3 (kΩ)	Vref (V)
	3.3	4.801	2.863	15	1.24
4	5	2.883	2.864	10	2.5
	12	10.971	2.864	17.8	2.5
	15	14.497	2.864	17.8	2.5
	24	24.872	2.863	20	2.5

Note: 1. Minimum load shouldn't be less than 5%, otherwise ripple may increase dramatically. Operation under minimum load will not damage the converter, however, they may not meet all specifications listed. 2. Maximum capacitive load is tested at input voltage range and full load.

All specifications are measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.</li>

### **REVISION HISTORY**

rev.	description	date
1.0	initial release	06/26/2013
1.01	updated spec	08/16/2013
1.02	updated spec	08/18/2014
1.03	updated spec	06/15/2015
1.04	discontinued heat sink versions	06/21/2019
1.05	safeties added to features and safety approvals line	02/15/2021
1.06	derating curve and circuit figures updated	08/18/2021
1.07	CE certification updated	12/07/2022
1.08	discontinued model PYB15-Q48-S3-U & PYB15-Q48-S5-U	04/11/2023
1.09	discontinued model PYB15-Q24-D15-T, PYB15-Q24-S12-T, PYB15-Q24-S15-T, PYB15-Q24-S24-T, PYB15-Q24-S3-T, PYB15-Q48-D12-T, PYB15-Q48-D15-T, PYB15-Q48-S12-T	07/06/2023
1.10	discontinued models PYB15-Q24-D12-T, PYB15-Q24-D5-T, PYB15-Q48-D5-T, PYB15-Q48-S15-T, PYB15-Q48-S3-T, PYB15-Q48-S5-T, PYB15-Q24-D12-U, PYB15-Q24-D5-U, PYB15-Q24-S12-U, PYB15-Q24-S15-U, PYB15-Q24-S24-U, PYB15-Q24-S3-U, PYB15-Q48-D12-U, PYB15-Q48-D15-U, PYB15-Q48-D5-U, PYB15-Q48-S15-U	10/04/2023

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 800.275.4899

Fax 503.612.2383 cui.com techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

.....

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.